


STOCK SYMBOL: 688308

**OKE** CUTTING  
TOOLS

# CUTTING TOOLS CATALOG

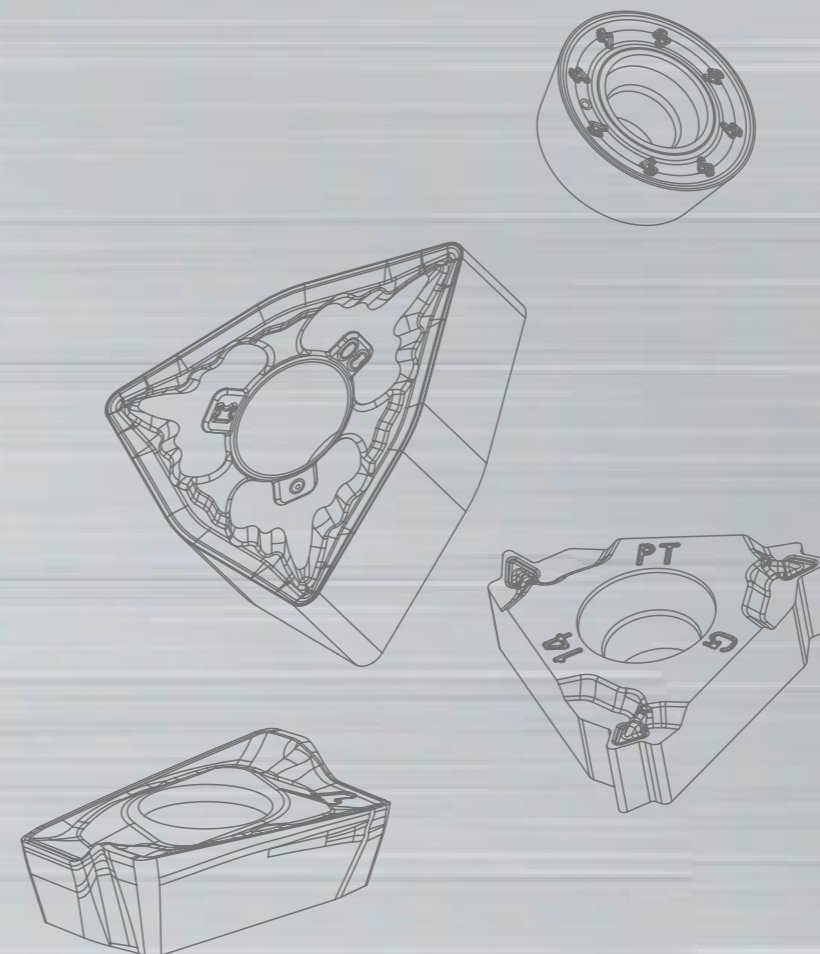

International Sales Hotline  
0086-731-27577393

## OKE Precision Cutting Tools Co., Ltd.


**Register Add:** Chuangye Rd, Chuangye Park for SMEs, Yanling County, Zhuzhou, Hunan, China.

**Working Add:** #588, Jinlong Area, Majiahe Rd, Tianyuan District, Zhuzhou, Hunan, China.

**Tel:**+86 0733-22673968 **Fax:**+86 0731-22673961

**E-mail:**oke\_info@oke-carbide.com info@oke-carbide.com

**Web:**www.oke-carbide.com

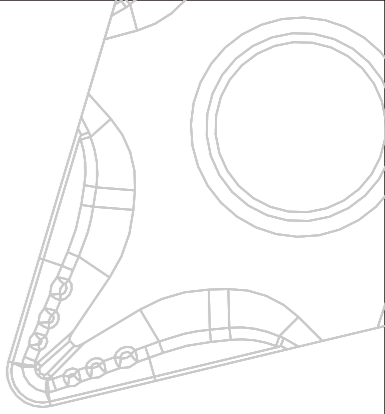

# Cutting Tools

---

**A**

Turning Tools

**B**

Milling Tools

**C**

Drilling Tools

**D**

Solid End Mill

**E**


General Technical Guide

## COMPANY PROFILE

OKE established in 1996, is a national high-tech enterprise as well as a national "Little Giant Enterprise" specializing in independent R&D, production and sales of cemented carbide products and CNC cutting tool products, OKE has become a listed company on the Science and Technology Innovation Board since 2020. OKE has founded a national Post-doctorate R&D center, OKE not only has the ability to develop and deliver the indexable inserts and tool holders simultaneously and quickly, but also have the ability to offer one-stop supply of carbide rods, solid carbide tools, cermet inserts and CBN&PCD tools and overall solution service. Until now, OKE has opened about 150 OKE Brand cutting tools shops in the world, products are sold in more than 40 countries, promoting global advanced manufacturing with high-quality services to solve machining problems. OKE will build a world-class first-rate brand with innovative tools and provide cutting solutions for global intelligent manufacturing.




## RHD MODULAR DRILL

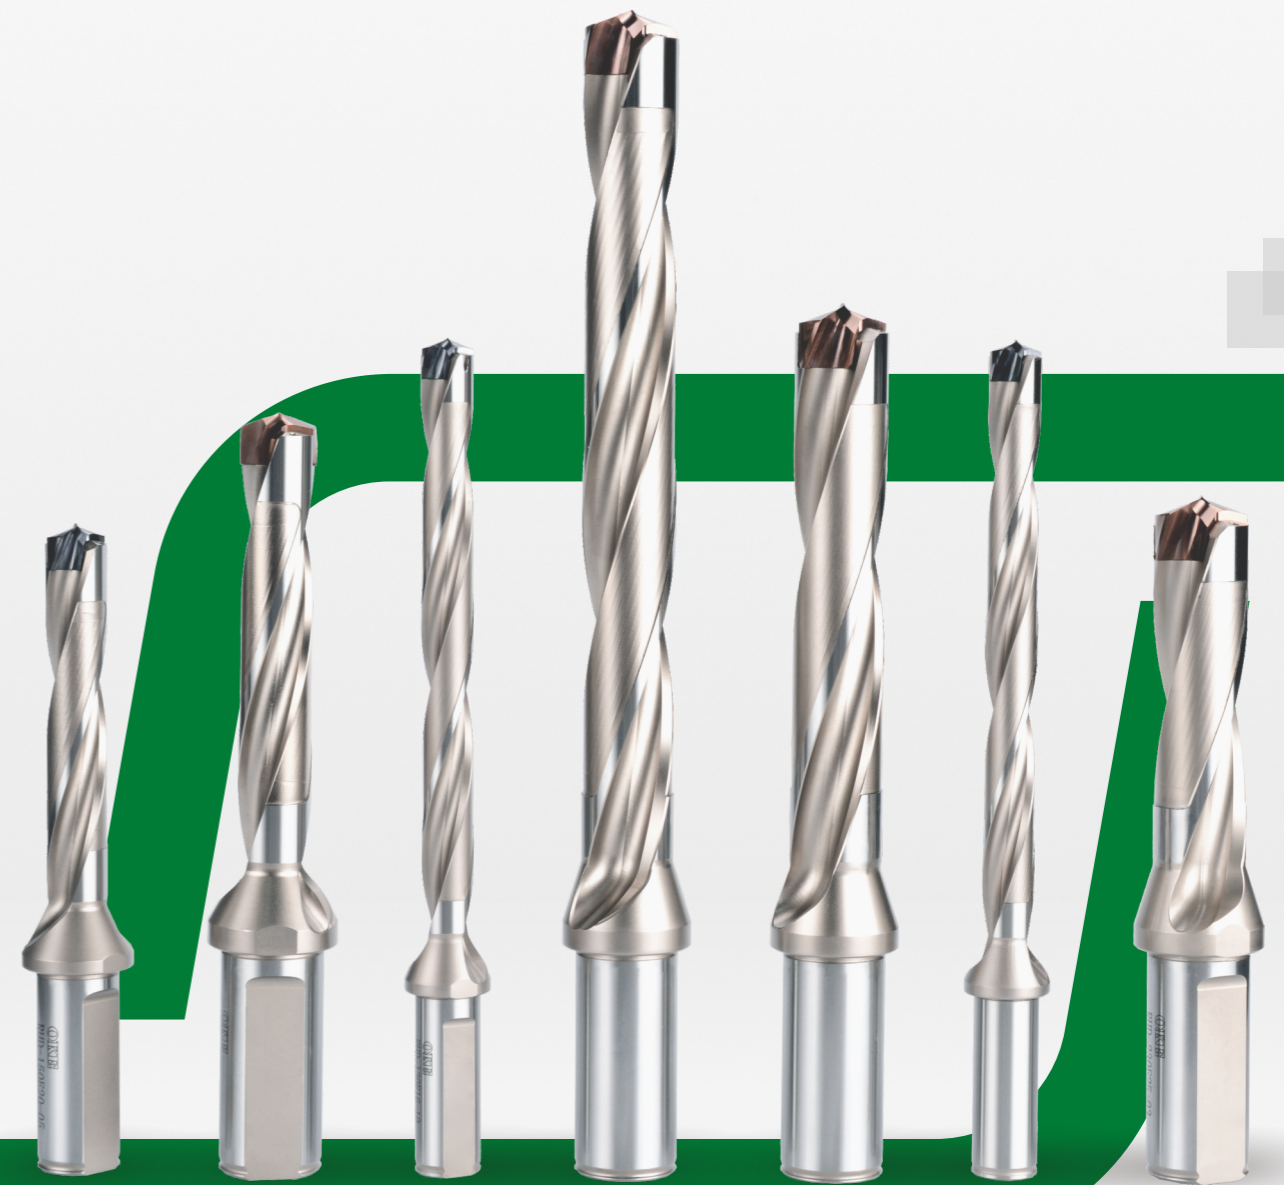

## HIGH-EFFICIENCY SMALL-DIAMETER DRILL AND DEEP-HOLE DRILL SERIES




## INDEXABLE CUTTING TOOLS FOR GEAR MACHINING

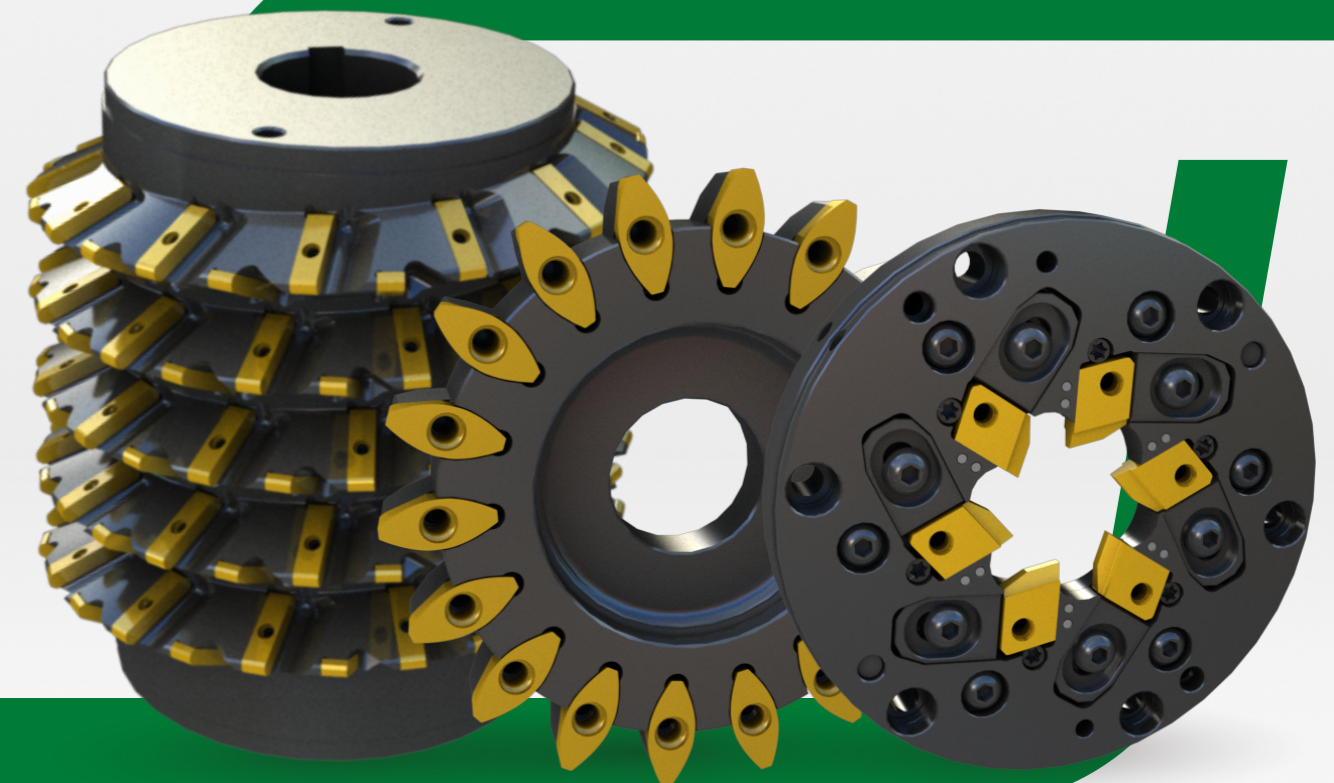

## PCBN TURNING INSERTS



## PCD TURNING INSERTS

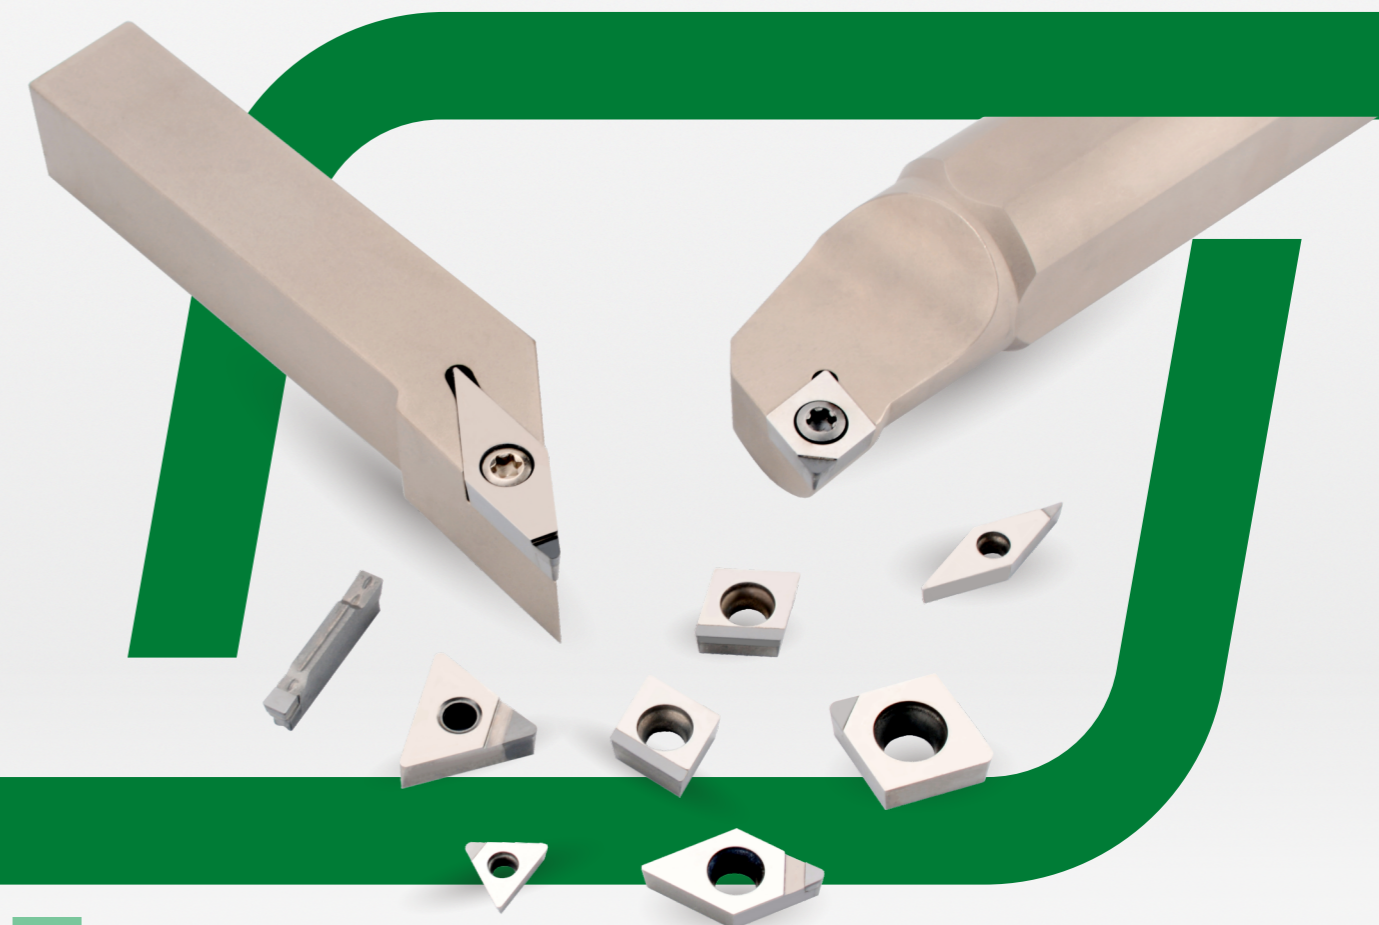

# Steel

## Finishing

### -OPF

Special designed for steel finishing;  
Unique design efficiently controls the form of chip and breaks chip;  
Sharp cutting edge, smooth cutting;  
Excellent surface quality.



### -OTF

Special chip breaker structure makes excellent chip breaking even at small cutting depth.  
Sharp cutting edge, cutting smoothly and quickly.

## Semi-Finishing

### -OPM

Negative chamfer designation gives blade good strength;  
Double chipbreaker lands, makes bigger chip control range.



### -OTM

Flat cutting edge design, good wear-resistance and breakage resistance.  
Inclination angle combination structure can control the chip breaking direction efficiently.



## Roughing

### -OPR

Three-dimension designed with double rake angle, wide margin and negative chamfer;  
Wonderful blade intensity gives a longer tool life time;  
Suitable for steel roughing machining.



### -OTR

Flat cutting edge with big rake angle, gives good wear-resistance.  
Varying chip breaker depth design, good performance on chip breaking control.




# Stainless Steel

## Finishing

### -OMF

Special designed rake angle and cutting edge inclination;  
Sharp cutting edge, small cutting force;  
Good machining surface quality.




### -MSF

Three-dimension designed with double rake angle;  
Sharp cutting edge and lower cutting resistance;  
Efficiently solved build up edge, work hardening and other machining problems.  
Cutting edge inclination designation is good to control chip flow direction and obtains excellent Surface quality.



### -OTF

Special chip breaker structure makes excellent chip breaking even at small cutting depth.  
Sharp cutting edge, cutting smoothly and quickly.



## Semi-Finishing


### -OMM

Special chipbreaker design to keep cutting edge sharp and safe;  
Good anti impact resistance;  
Excellent tool life time;




### -MF

Special chipbreaker design to keep both sharp cutting edge and increased blade intensity;  
Efficiently solved break chip, high cutting temperature, sticking, work hardening and other machining problems.  
It has very excellent efficiency



### -OTM

Flat cutting edge design, good wear-resistance and breakage resistance.  
Inclination angle combination structure can control the chip breaking direction efficiently.



## Cast Iron

Finishing To Semi-Finishing

### -OKM

Wide support surface for stable clamping and preventing chipping

Sharp cutting edge, improve workpiece surface quality

Excellent chipping resistance in continuous machining

High quality surface roughness



Roughing



### -OKR

Wide support surface for stable clamping and preventing chipping

Optimized edge width for high-speed, high-feed machining

Excellent chipping resistance in interrupted machining

Improve machining stability and extend tool life

## High Temperature Alloy

Semi-Finishing

### -SMM

Three-dimensional groove design with large rake angle;

Sharp cutting edge and low cutting force;

Processing difficulties such as high temperature processing and work hardening;

Suitable for finishing of super-alloy materials.





### -OSM

Effectively control chip curling and flow;  
Sharp cutting edge, smooth quick cutting;  
Proper edge strength gives a longer service life

# Aluminum Alloy


-NL

Finishing To Roughing

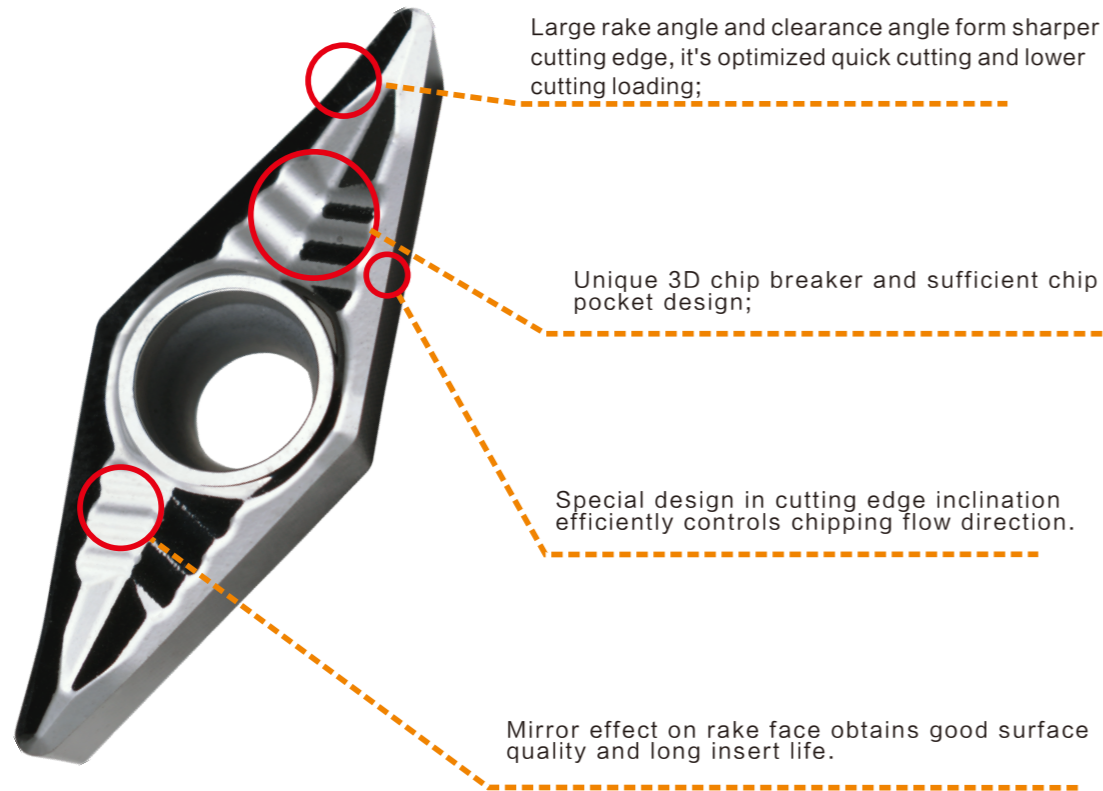


# Parting and Grooving

-OC

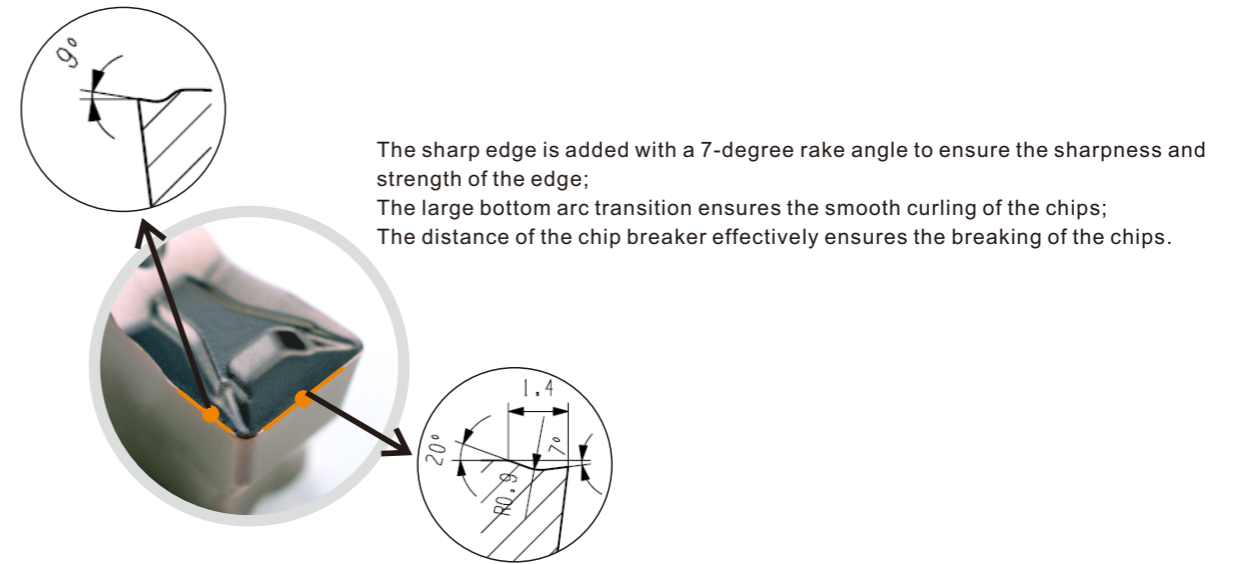

-MG

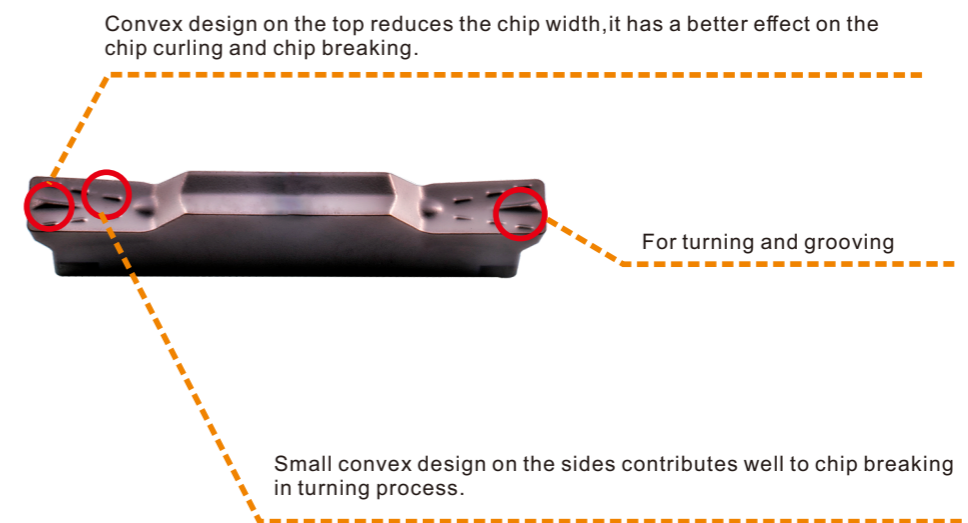

# CVD

Grade	Hardness	Coating Type	Colour	Feature
OC2415	1520	CVD	Double color	Fine columnar structure Al <sub>2</sub> O <sub>3</sub> coating technology, nanostructure columnar TiCN coating. The combination of the new thickened CVD coating and the high-hardness substrate has excellent wear resistance, red hardness and crater wear resistance. Preferred grade for semifinishing to finishing steel machining. ●
OC2125	1480	CVD	Black	Low Cobalt content, and high cubic content carbide substrate combine with thick TiCN and Al <sub>2</sub> O <sub>3</sub> , treated by special after coating treatment, which gives insert wonderful wearing resistance. Preferred grade for semifinishing to finishing steel machining. ●
OC2325	1480	CVD	Yellow	Medium cobalt content, and high cubic content carbide substrate combine with strong texture TiCN and Al <sub>2</sub> O <sub>3</sub> coating. After special treatment, it has wonderful abrasion resistance. ●
OC2325S	1480	CVD	Double color	Gradient hard alloy substrate with rich cubic phase content has better high temperature performance and plastic deformation resistance. The uniform dense and fine-grained coating has excellent wear resistance, and the special transition layer structure ensures the anti-peeling performance of the coating; The unique post-processing technology realizes a two-color marking layer and uniform compressive stress distribution, ensuring higher wear resistance and stability. It is suitable for turning of various steels and is the first choice for wear resistance. ●

# CVD

Grade	Hardness	Coating Type	Colour	Feature
OC2425	1470	CVD	Double color	High cubic content gradient carbide substrate, gives good anti-deformation resistance and excellent high temperature performance. Dense and uniform ultra-fine-grained coating, providing excellent wear resistance, unique transition layer structure, to ensure the anti-peeling performance of the coating; unique post-processing technology, realizing two-color and beneficial compressive stress distribution, to achieve higher resistance Abrasiveness and stability. The substrate edge part adopts a unique "skeleton" structure, which achieves excellent cutting performance and good safety. The red hardness of the substrate is further improved by optimizing and adjusting the ratio of raw materials in the solid solution and the particle size of the raw materials. It is suitable for high-efficiency, light-interrupted machining of P10-P20 (medium and high carbon steel, low alloy steel), with a wider application range and better stability. ●
OC3210	1650	CVD	Double color	Fine-grained and high-hardened chemical coating, the substrate has good wear resistance, and achieves stability and long life in a wide range of processing fields. Gray cast iron, ductile iron machining (continuous, light interrupted conditions) Gray cast iron, ductile iron machining (small parts roughing) ●
OC3215	1580	CVD	Black	The medium-coarse substrate combine with thick TiCN and textured Al <sub>2</sub> O <sub>3</sub> , after special after coating treatment, it has outstanding wearing resistance. Suitable for high speed semi-finishing cast iron cutting under stable work condition. ●
OC3220	1600	CVD	Double color	MTCVD TiCN-Al <sub>2</sub> O <sub>3</sub> coating strengthened by fine-grained α-Al <sub>2</sub> O <sub>3</sub> film, the substrate is a kind of hard alloy with good toughness Gray cast iron, ductile iron machining (strong interrupted conditions) Gray cast iron, ductile iron machining (roughing, black skin conditions) ●
OC4315	1480	CVD	Gold	Medium Cobalt content, and high cubic content carbide substrate combine with thin TiCN and Al <sub>2</sub> O <sub>3</sub> , treated by special after coating treatment, which gives insert wonderful wearing resistance. Preferred grade for stainless steel turning at high speed. ●


# PVD

Grade	Hardness	Coating Type	Colour	Feature
OP1030	1500	PVD	Gray	High Co content and ultra fine WC grain substrate, gives wonderful toughness, combines with PVD AlTiN coating, it has good strength and versatility. Suitable for steel and stainless steel milling and drilling. ● ●
OP1205	1650	PVD	Dark Purple	High Co content and ultra fine WC grain substrate, gives wonderful cutting edge strength, combines with good thermal stability silicon coating, it has very small coefficient of friction, and good nano hardness. Suitable for steel and stainless steel continue turning and threading. ● ●
OP1215	1560	PVD	Dark Purple	High Co content and fine WC grain substrate, gives wonderful cutting edge strength, combines with good thermal stability silicon coating, it has very small coefficient of friction, and good nano hardness. Good at stainless steel semi-finishing turning, parting and grooving processing. preferred grade for steel and stainless steel milling and drilling. ● ●
OP1315	1560	PVD	Gray	High Co content and fine WC grain substrate, gives wonderful cutting edge strength, combines with new AlTiN coating, it has very small coefficient of friction, high antioxidant temperature, and good nano hardness. Preferred grade for steel and stainless steel milling and drilling. ● ●

Grade	Hardness	Coating Type	Colour	Feature
OP1415	1550	PVD	Dark Purple	The coating has dense columnar crystals and small gaps between crystals, which can effectively improve the oxidation resistance and plastic deformation resistance; The lower the roughness of the coating surface, the lower the resistance and heat generated during cutting can be effectively reduced; The bonding force between the film layer and the substrate is strong, which reduces the abnormal cracking of the product and improves the service life of the tool. ●
OP1325	1580	PVD	Yellow	New material substrate has good anti wear resistance and anti impact resistance. Combining with multiple layers AlTiN coating, it has excellent adhesion between coating and substrate which improves tool life significantly. Suitable for general steel, and stainless steel milling. ● ●
OP1630	1520	PVD	Yellow	Newly upgraded coating technology, the new king of steel milling; Enhanced tip design, excellent impact resistance; Improved side, stable fit; With supporting development of steel products, the performance is better; ●
OP2202	1640	PVD	Gray	High Co content and ultra fine WC grain substrate, gives wonderful cutting edge strength, combines with PVD AlTiN coating, it has outstanding wearing resistance. Suitable for steel and cast iron slight milling. ● ●

## Turning inserts for difficult-to-cut materials Series ISO turning—Carbide inserts

Turning inserts for difficult-to-cut materials  
OP6105A/OP6115A/OP6215

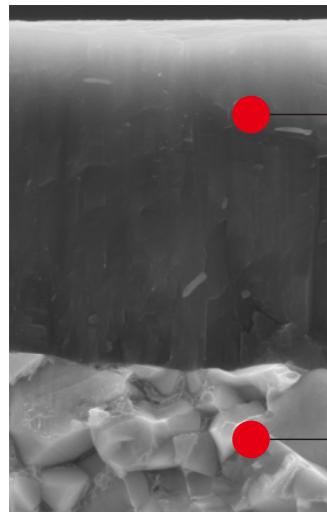


### Advanced HiPIMS coating technology

Realize that good adhesion of the coating film on the matrix;  
The surface of the product is smooth without droplets, and the cutting resistance is small;  
TiAlSiN multi-layer film structure, which realizes the product with super high oxidation resistance, high wear resistance and anti-adhesion characteristics;

### Newly developed tough carbide matrix

Improve toughness while maintaining red hardness, and achieve good boundary wear resistance and edge collapse resistance;


### Grade and Chipbreaker introduction

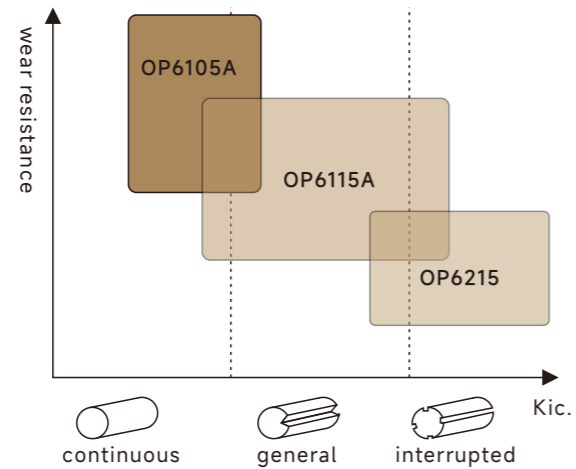


### Negative inserts (difficult-to-cut materials)

Negative inserts (difficult-to-cut materials)

Positive inserts (difficult-to-cut materials)

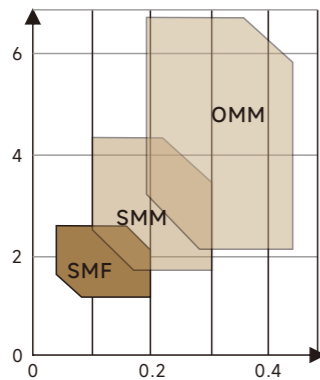

SMF: Finishing chipbreaker (fine grind)  
SMM: Universal turning chipbreaker

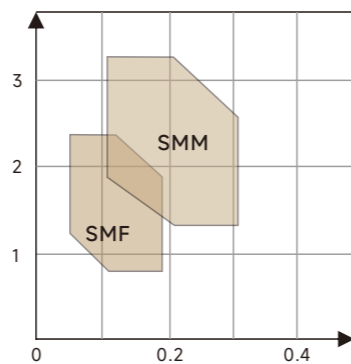


SMF: Finishing chipbreaker (fine grind)  
SMM: Universal to roughing turning

### cemented carbide

Grade	ISO	Machined						coating technology	Grade features	Example
		P	M	K	N	S	H			
OP6105A	P05 (P05-P15)	•						PVD TiAlSiN	Fine-grained cemented carbide PVD coating grade has outstanding red hardness and plastic deformation resistance, and has excellent blade safety;	
	M05 (M05-M15)	••								
	S05 (S05-S15)					••				
OP6115A	P15 (P10-P20)	•					PVD TiAlSiN	Thin PVD coating containing Si has high bonding strength with sharp cutting edge, smooth surface has excellent adhesion resistance, and dense coating structure has outstanding oxidation resistance and wear resistance.		
	M15 (M10-M20)	••								
	S15 (S10-S20)					••				
OP6215	P25 (P20-P30)	•					PVD AlTiN+ZrN	Fine grain cemented carbide matrix material, excellent cutting edge strength; The dense PVD coating has extremely low resistance, excellent oxidation resistance and outstanding high temperature resistance;		
	M25 (M20-M30)	••								
	S25 (S20-S30)					••				

### Grade application

ISO	Machined materials	ISO	Grade	Recommend V (m/min)	Features	Suitable working condition
S	Hi-temp Alloy (Fe-based, Ni-based or Co-based, $\alpha+\beta$ titanium alloy)	S05	OP6105A	50 30-80	High wear-resistant recommended grade	Finishing to universal cutting
		S15	OP6115A	40 25-60	First recommended universal grade	Universal to heavy cutting
		S25	OP6215	25 20-35	High stability recommended grade	roughing to light interrupted cutting

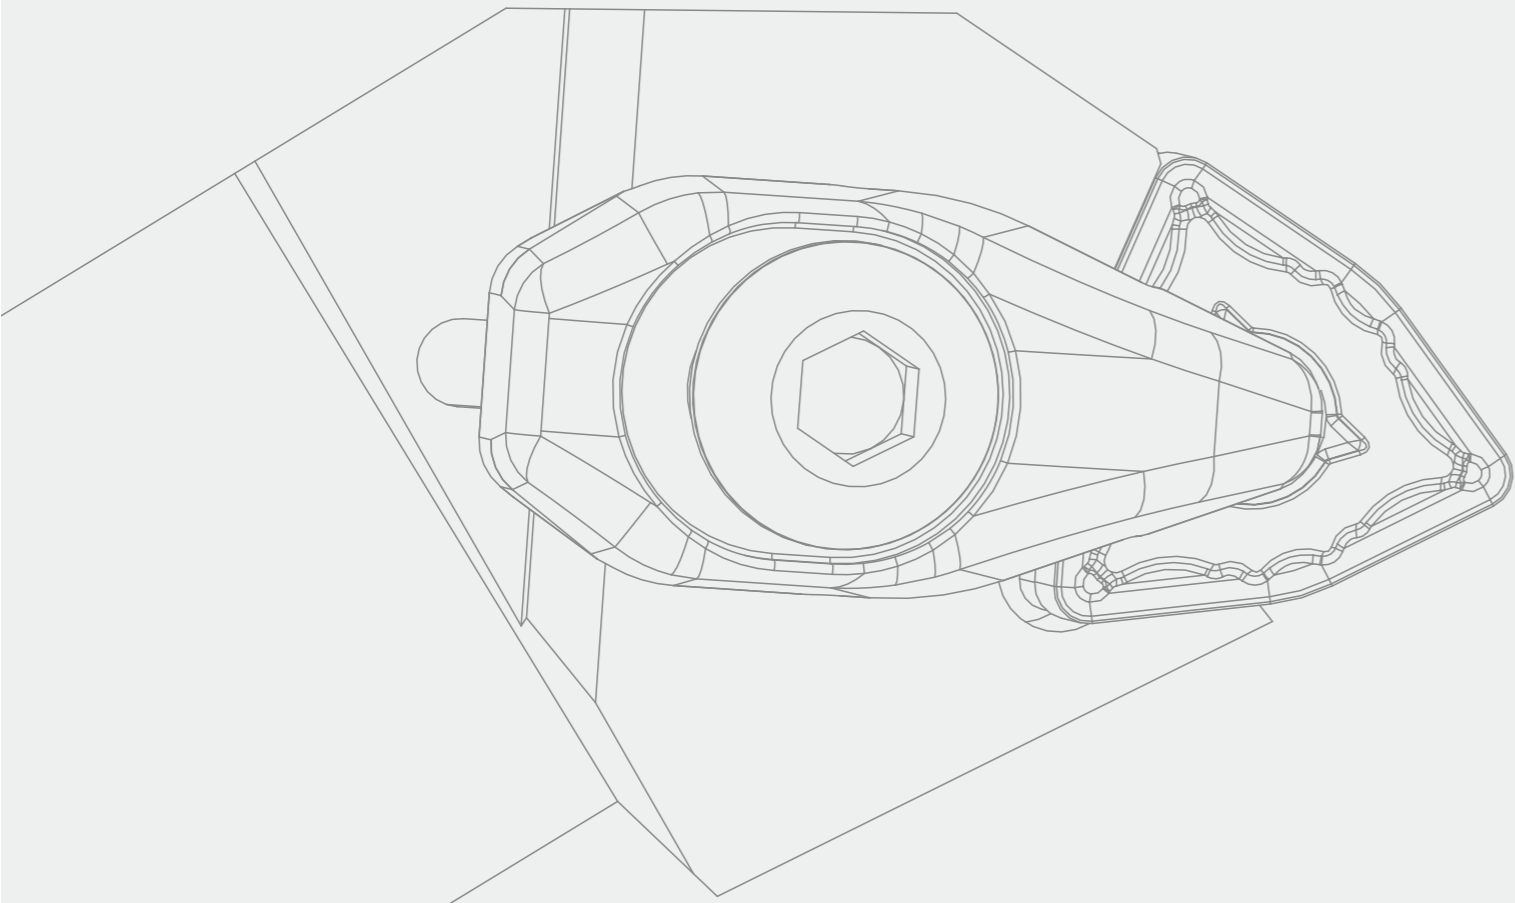


# A Turning Tools

---

a Turning Insert ..... 001-058

b Turning Tools ..... 059-140

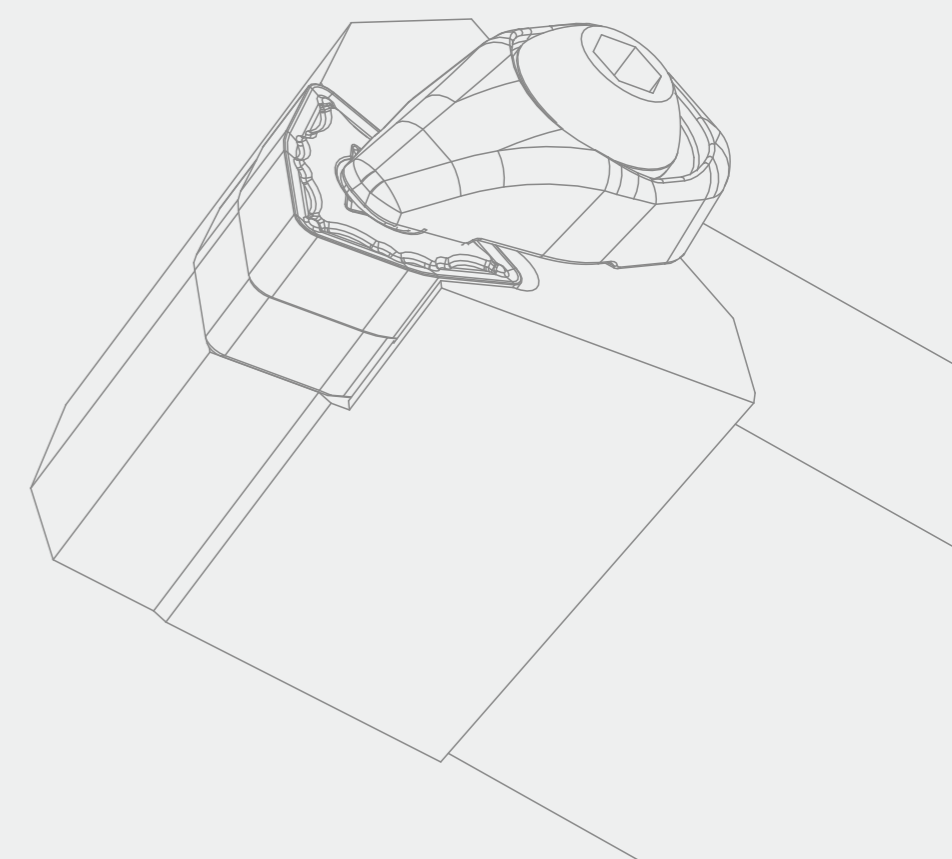

### ISO Turning Insert Naming Rules

#### Shape

C N M G 12 04 08 — OPM

<b>A</b> 	<b>B</b> 	<b>C</b> 
<b>D</b> 	<b>E</b> 	<b>H</b> 
<b>K</b> 	<b>L</b> 	<b>M</b> 
<b>O</b> 	<b>P</b> 	<b>R</b> 
<b>S</b> 	<b>T</b> 	<b>T</b> 
<b>V</b> 	<b>W</b> 	<b>Z</b> 

#### Chip Breaker and Hole

C N M G 12 04 08 — OPM

Symbol	Center Hole	Chip Breaker	Insert Profile	Symbol	Center Hole	Chip Breaker	Insert Profile
<b>B</b>	(Y)	(N)		<b>N</b>	(N)	(N)	
<b>H</b>	(Y)	(S)		<b>R</b>	(N)	(S)	
<b>C</b>	(Y)	(N)		<b>F</b>	(N)	(D)	
<b>J</b>	(Y)	(D)		<b>A</b>	(Y)	(N)	
<b>W</b>	(Y)	(N)		<b>M</b>	(Y)	(S)	
<b>T</b>	(Y)	(S)		<b>G</b>	(Y)	(D)	
<b>Q</b>	(Y)	(N)		<b>X</b>			
<b>U</b>	(Y)	(D)					

#### Clearance Angle

C N M G 12 04 08 — OPM

<b>A</b> 	<b>B</b> 
<b>C</b> 	<b>D</b> 
<b>E</b> 	<b>F</b> 
<b>G</b> 	<b>N</b> 
<b>P</b> 	<b>O</b> Others

#### Tolerance

C N M G 12 04 08 — OPM

Symbol	m(mm)	d=i.c. (mm)	s (mm)	(reference)M grade tolerance detail(according to shape, size.) Tolerance of insert nose height						
				Inscribed Circle	Regular Triangle	Square	80° Rhombus	55° Rhombus	35° Rhombus	Round
<b>A</b>	±0.005	±0.025	±0.025	6.35	±0.08	±0.08	±0.08	±0.11	±0.16	...
				9.525	±0.08	±0.08	±0.08	±0.11	±0.16	...
				12.7	±0.13	±0.13	±0.13	±0.15	...	...
<b>F</b>	±0.005	±0.013	±0.025	15.875	±0.15	±0.15	±0.15	±0.18	...	...
<b>C</b>	±0.013	±0.025	±0.025	19.05	±0.15	±0.15	±0.15	±0.18	...	...
<b>H</b>	±0.013	±0.013	±0.013	25.4	...	±0.18	...	...	...	...
<b>E</b>	±0.025	±0.025	±0.025	●Tolerance of Inscribed Circle						
<b>G</b>	±0.025	±0.025	±0.13	Inscribed Circle	Regular triangle	Square	80° Rhombus	55° Rhombus	35° Rhombus	Round
<b>J</b>	±0.005	±0.05-±0.13	±0.025	6.35	±0.05	±0.05	±0.05	±0.05	±0.05	
<b>K</b>	±0.013	±0.05-±0.13	±0.025	9.525	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
<b>L</b>	±0.025	±0.05-±0.13	±0.025	12.7	±0.08	±0.08	±0.08	±0.08	...	±0.08
<b>M</b>	±0.08-±0.18	±0.05-±0.13	±0.13	15.875	±0.1	±0.1	±0.10	±0.10	...	±0.1
<b>N</b>	±0.08-±0.18	±0.05-±0.13	±0.025	19.05	±0.1	±0.1	±0.10	±0.10	...	±0.1
<b>U</b>	±0.13-±0.38	±0.08-±0.25	±0.13	25.4	...	...	±0.13	...	...	±0.13

### ISO Turning Insert Naming Rules

#### Cutting Edge Length

C N M G 12 04 08 — OPM

Inscribed Circle diameter(mm)	Insert Shape							
	<b>C</b>	<b>D</b>	<b>R</b>	<b>S</b>	<b>T</b>	<b>V</b>	<b>W</b>	<b>K</b>
3.97					06			
5			05					
5.56					09			
6			06					
6.35	06	07			11	11		
8			08					
9.525	09	11	09	09	16	16	06	16
10			10					
12			12					
12.7	12	15	12	12	22	22	08	
15.875	16		15	15	27			
16			19	16				
19.05	19		19	19	33			
20			20					
25	25	25	25					
25.4			25	25				
31.75			31					
32			32					

#### Thickness

C N M G 12 04 08 — OPM

Symbol	Thickness(mm)
<b>00</b>	0.79
<b>T0</b>	0.99
<b>01</b>	1.59
<b>T1</b>	1.98
<b>02</b>	2.38
<b>T2</b>	2.58
<b>03</b>	3.18
<b>T3</b>	3.97
<b>04</b>	4.76
<b>T4</b>	4.96
<b>05</b>	5.56
<b>T5</b>	5.95
<b>06</b>	6.35
<b>T6</b>	6.75
<b>07</b>	7.94
<b>09</b>	9.52
<b>T9</b>	9.72
<b>11</b>	11.11
<b>12</b>	12.7

The Height Between Insert Bottom And Nose

#### Corner Radius

C N M G 12 04 08 — OPM

Symbol	Corner Radius ( mm )
<b>00</b>	
<b>02</b>	0.2
<b>04</b>	0.4
<b>08</b>	0.8
<b>12</b>	1.2
<b>16</b>	1.6
<b>20</b>	2
<b>24</b>	2.4
<b>32</b>	3.2
<b>X</b>	其它 Special

Diameter Dimension      Round Insert

#### Chip Breaker

C N M G 12 04 08 — OPM

<b>OPF</b>	<b>OPM</b>	<b>OPR</b>	<b>OMF</b>	<b>OMM</b>
<b>MSF</b>	<b>MSF</b>	<b>OTF</b>	<b>OTM</b>	<b>OTR</b>
<b>OKM</b>	<b>OKR</b>	<b>OSM</b>	<b>SMM</b>	<b>NL</b>

# Inserts Overview

<b>CNMG-OPF</b>	<b>CNMG-OMF</b>	<b>CNMG-MSF</b>	<b>CNMG-OPM</b>	<b>CNMG-OMM</b>	<b>CNMG-MF</b>
					
EdgeLength 12.9	EdgeLength 12.9	EdgeLength 9.7 12.9	EdgeLength 12.9 16.1 19.3	EdgeLength 12.9 16.1	EdgeLength 9.7 12.9 16.1
<b>CNMG-OKM</b>	<b>CNMG-OSM</b>	<b>CNMG-SMM</b>	<b>CNMG-OPR</b>	<b>CNMG-OMR</b>	<b>CNMG-OKR</b>
					
EdgeLength 12.9	EdgeLength 12.9	EdgeLength 12.9	EdgeLength 12.9 16.1 19.3	EdgeLength 12.9	EdgeLength 12.9 16.1
<b>CNMM-PR</b>	<b>CNMM-PR</b>	<b>CNMG</b>	<b>CNMA</b>	<b>DNMG-OPF</b>	<b>DNMG-OMF</b>
					
EdgeLength 19.3	EdgeLength 25.8	EdgeLength 12.7 16.1 19.3	EdgeLength 12.7 16.1 19.3	EdgeLength 11.6 15.5	EdgeLength 15.5
<b>DNMG-MSF</b>	<b>DNMG-OPM</b>	<b>DNMG-OMM</b>	<b>DNMG-MF</b>	<b>DNMG-OKM</b>	<b>DNMG-OSM</b>
					
EdgeLength 11.6 15.5	EdgeLength 11.6 15.5	EdgeLength 11.6 15.5	EdgeLength 11.6 15.5	EdgeLength 15.5	EdgeLength 15.5
<b>DNMG-OPR</b>	<b>DNMG-OKR</b>	<b>DNMG</b>	<b>DNMA</b>	<b>SNMG-OPF</b>	<b>SNMG-OMF</b>
					
EdgeLength 15.5	EdgeLength 15.5	EdgeLength 11.6 15.5	EdgeLength 15.5	EdgeLength 12.7	EdgeLength 12.7
<b>SNMG-OPM</b>	<b>SNMG-OMM</b>	<b>SNMG-MF</b>	<b>SNMG-OKM</b>	<b>SNMG-OSM</b>	<b>SNMG-SMM</b>
					
EdgeLength 12.7 15.875 19.05	EdgeLength 12.7 15.875	EdgeLength 12.7	EdgeLength 12.7	EdgeLength 12.7	EdgeLength 12.7

# Inserts Overview

<b>SNMG-OPR</b>	<b>SNMM-OPR</b>	<b>SNMG-OKR</b>	<b>SNMM-PR</b>	<b>SNMG</b>	<b>SNMA</b>
					
EdgeLength 12.7 15.875 19.05	EdgeLength 19.05	EdgeLength 12.7 15.875 19.05	EdgeLength 25.4	EdgeLength 12.7 15.875 19.05 25.4	EdgeLength 12.7
<b>TNMG-OPF</b>	<b>TNMG-OMF</b>	<b>TNMG-MSF</b>	<b>TNMG-OPM</b>	<b>TNMG-OMM</b>	<b>TNMG-MF</b>
					
EdgeLength 16.5	EdgeLength 16.5	EdgeLength 16.5	EdgeLength 16.5 22	EdgeLength 16.5 22	EdgeLength 16.5 22
<b>TNMG8-OKM</b>	<b>TNMG-SMM</b>	<b>TNMG-OPR</b>	<b>TNMG-OMR</b>	<b>TNMG-OKR</b>	<b>TNMG</b>
					
EdgeLength 16.5	EdgeLength 16.5	EdgeLength 16.5 22 27.5	EdgeLength 16.5	EdgeLength 16.5	EdgeLength 16.5 22
<b>TNMA</b>	<b>VNMG-OPF</b>	<b>VNMG-MSF</b>	<b>VNMG-OPM</b>	<b>VNMG-OMM</b>	<b>VNMG-MF</b>
					
EdgeLength 16.5 22	EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6
<b>VNMG-OKM</b>	<b>VNMG-SMM</b>	<b>VNMG-OPR</b>	<b>VNMG-OKR</b>	<b>VNMG</b>	<b>VNMA</b>
					
EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6	EdgeLength 16.6
<b>WNMG-OPF</b>	<b>WNMG-OMF</b>	<b>WNMG-MSF</b>	<b>WNMG-OPM</b>	<b>WNMG-OMM</b>	<b>WNMG8-MF</b>
					
EdgeLength 6.5	EdgeLength 6.5 8.7	EdgeLength 6.5 8.7	EdgeLength 6.5 8.7	EdgeLength 6.5 8.7	EdgeLength 6.5 8.7

# Inserts Overview

<b>WNMG-OKM</b>	<b>WNMG-SMM</b>	<b>WNMG-OPR</b>	<b>WNMG-OMR</b>	<b>WNMG-OKR</b>	<b>WNMG</b>
					
EdgeLength 8.7	EdgeLength 8.7	EdgeLength 8.7	EdgeLength 8.7	EdgeLength 8.7	EdgeLength 8.7
<b>WNMA</b>	<b>CCMT-OTF</b>	<b>CCMT-MSF</b>	<b>CCMT-OTM</b>	<b>CCMT-OTR</b>	<b>DCMT-OTF</b>
					
EdgeLength 8.7	EdgeLength 6.4 9.7 12.9	EdgeLength 6.4 9.7 12.9	EdgeLength 6.4 9.7 12.9	EdgeLength 6.4 9.7 12.9	EdgeLength 7.8 11.6
<b>DCMT-MSF</b>	<b>DCMT-OTM</b>	<b>DCMT-OTR</b>	<b>RCMXMO</b>	<b>RCMXMO-Q</b>	<b>RCMTMO</b>
					
EdgeLength 7.8 11.6	EdgeLength 7.8 11.6	EdgeLength 11.6	EdgeLength 8.0	EdgeLength 12 16 20 25 32	EdgeLength 8.0
<b>RCMTMO-Q</b>	<b>SCMT-OTF</b>	<b>SCMT-OTM</b>	<b>SCMT-OTR</b>	<b>TCMT-OTF</b>	<b>TCMT-OTM</b>
					
EdgeLength 16	EdgeLength 9.525 12.7	EdgeLength 9.525 12.7	EdgeLength 9.525 12.7	EdgeLength 11 16.5	EdgeLength 9.6 11 16.5
<b>TCMT-OTR</b>	<b>VBMT-OTF</b>	<b>VBMT-OTM</b>	<b>VBMT-OMM</b>	<b>VBMT-OSM</b>	<b>VBMT-OTR</b>
					
EdgeLength 16.5 22	EdgeLength 16.5	EdgeLength 11 16.5	EdgeLength 16.5	EdgeLength 16.5	EdgeLength 16.5
<b>VCMT-OTF</b>	<b>VCMT-OTM</b>	<b>VCMT-OSM</b>	<b>TPGH</b>	<b>KNUX</b>	<b>175.32</b>
					
EdgeLength 11 16.5	EdgeLength 16.5	EdgeLength 16.5	EdgeLength 6.4 8.2 9.6 11	EdgeLength 16.2	EdgeLength 19.1

# Inserts Overview





<b>175.32</b>

EdgeLength 19.1



## Insert for Aluminum

<b>CCGX-NL</b>	<b>DCGX-NL</b>	<b>RCGT-NL</b>	<b>SCGX-NL</b>	<b>TCGX-NL</b>	<b>VCGX-NL</b>
					
EdgeLength 6.4 9.7 12.9	EdgeLength 7.8 11.6	EdgeLength 6.5 8.7	EdgeLength 9.525 12.7	EdgeLength 9.6 11 16.5	EdgeLength 11 16.5 22

## Cermet Inserts







<b>CNMG-SAL</b>	<b>TNMG-SAL</b>	<b>VNMG-SAL</b>	<b>WNM-SAL</b>
			
EdgeLength 12.9	EdgeLength 16.5	EdgeLength 16.6	EdgeLength 8.7







## Parting and Grooving Inserts

<b>Q□□D-MG</b>	<b>Q□□W-OC</b>
	
EdgeLength 2.5 3 4 5 6	EdgeLength 2 2.5 3 4 5

# Inserts Overview

## Threading Insert

60° general pitch threads	55° general pitch threads	ISO metric threads	Unified thread (American standard thread)	Whitworth threads	British standard taper pipe threads
 P47	 P48	 P49	 P50	 P51	 P52

NPT American standard taper pipe threads	UNJ American standard aerospace and aviation threads	30° DIN405 round threads	Petroleum pipeline threads	30° ISO metric threading insert	29° American standard ACME threads
 P53	 P54	 P55	 P56	 P56	 P57

29° American standard STACME threads
 P58


# Chipbreaker Introduction Chart

ISO Code	P	P/M	M	K	N	S
Finishing	<b>OPF</b> OPF Chip Breaker: Suitable for finishing ISO P material.	<b>OTF</b> OTF Chip Breaker: Suitable for finishing ISO P and M material.	<b>OMF</b> OMF Chip Breaker: Suitable for finishing ISO M material.			
			<b>MSF</b> MSF Chip Breaker: Suitable for finishing ISO M material.			
Semi Finishing	<b>OPM</b> OPM Chip Breaker: Suitable for semi-finishing ISO P material.	<b>OTM</b> OTM Chip Breaker: Suitable for semi-finishing ISO P and M material.	<b>MF</b> MF Chip Breaker: Suitable for semi-finishing ISO M material.	<b>OKM</b> Suitable for gray cast iron, nodular cast iron continuous/slight interrupt cutting		<b>SMM</b> Suitable for long time continuous semi-finishing to finishing cutting.
			<b>OMM</b> OMM Chip Breaker: Suitable for semi-finishing ISO M material.	<b>General Chipbreaker:</b> General Chip Breaker: Suitable for cast iron semi-finishing cutting.	<b>NL</b> NL Chip Breaker: Suitable for aluminum and aluminum alloy material.	<b>OSM</b> OSM Chip Breaker: Suitable for hi-temp alloy semi-finishing machining
Roughing	<b>OPR</b> OPR Chip Breaker: Suitable for roughing ISO P material.	<b>OTR</b> OTR Chip Breaker: Suitable for finishing ISO M material.		<b>OKR</b> Suitable for gray cast iron, nodular cast iron interrupt and roughing cutting at high feed, and high speed.		
				<b>Flat:</b> Flat Chip Breaker: Suitable for cast iron roughing cutting		

# Grade Overview

ISO Usage	ISO Turning			Threading	Parting and Grooving			Milling			Drilling	
	Coating			Coating	Coating			Coating			Coating	
	CVD	PVD	Uncoated Carbide	PVD	CVD	PVD	Uncoated Carbide	CVD	PVD	Uncoated Carbide	CVD	PVD
Steel	01			OP1210								
	10	OC2415				OP1215		OP1215				
	20	OC2125, OC2325, OC2325S, OC2425						OP1215, OP1315, OP1325, OP1630, OP2202				
	30											
	40											
Stainless Steel	01	OC4315		OP1210								
	10		OP1215, OP1315, OP1415								OP1215	
	20											OP1030
	30							OP1215, OP1315, OP1325				
	40											
Cast Iron	01											
	10		OC3215, OC3220		OC4020			OP2202				OP1215
	20	OC3210										
	30											
	40											
Aluminum Alloy	01											
	10			OK434								
	20											
	30											
	40											
Hi-temp Alloy	01											
	10											
	20											
	30											
	40											


# Turning Insert (Negative) CN□□

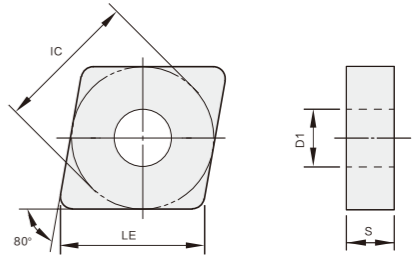

Insert Shape	Type	Dimension					P	M	K	S
		LE	IC	S	D1	RE				
	CNMG120404-OPF	12.9	12.7	4.76	5.16	0.4	●	●	▲	
	CNMG120408-OPF	12.9	12.7	4.76	5.16	0.8	●	●	▲	
	CNMG120404-OMF	12.9	12.7	4.76	5.16	0.4		●	●	▲
	CNMG120408-OMF	12.9	12.7	4.76	5.16	0.8		●	●	▲
	CNMG090304-MSF	9.7	9.525	3.18	3.81	0.4		●	●	▲
	CNMG120404-MSF	12.9	12.7	4.76	5.16	0.4		●	●	▲
	CNMG120404-OPM	12.9	12.7	4.76	5.16	0.4	●	●	▲	
	CNMG120408-OPM	12.9	12.7	4.76	5.16	0.8	●	●	▲	
	CNMG120412-OPM	12.9	12.7	4.76	5.16	1.2	●	●	▲	
	CNMG120416-OPM	12.9	12.7	4.76	5.16	1.6	●	●	▲	
	CNMG160608-OPM	16.1	15.875	6.35	6.35	0.8	●	●	▲	
	CNMG160612-OPM	16.1	15.875	6.35	6.35	1.2	●	●	▲	
	CNMG160616-OPM	16.1	15.875	6.35	6.35	1.6	●	●	▲	
	CNMG190608-OPM	19.3	19.05	6.35	7.94	0.8	●	●	▲	▲
CNMG190612-OPM	19.3	19.05	6.35	7.94	1.2	●	●	▲	▲	
CNMG190616-OPM	19.3	19.05	6.35	7.94	1.6	●	●	▲	▲	

▲ Featured grade ● Optional grade


# Turning Insert (Negative) CN□□

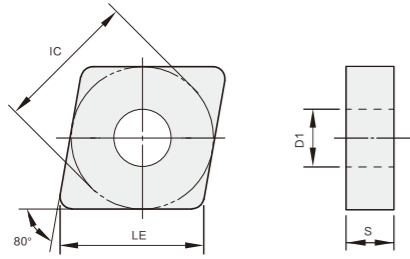

Insert Shape	Type	Dimension					P				M			K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	CNMG120404-OMM	12.9	12.7	4.76	5.16	0.4					●	▲	●									
	CNMG120408-OMM	12.9	12.7	4.76	5.16	0.8					●	▲	●									
	CNMG160608-OMM	16.1	15.875	6.35	6.35	0.8					●	▲	●									
	CNMG090308-MF	9.7	9.525	3.18	3.81	0.8					●	▲	●									
	CNMG120404-MF	12.9	12.7	4.76	5.16	0.4					●	▲	●									
	CNMG120408-MF	12.9	12.7	4.76	5.16	0.8					●	▲	●									
	CNMG120412-MF	12.9	12.7	4.76	5.16	1.2					●	▲	●									
	CNMG160612-MF	16.1	15.875	6.35	6.35	1.6					●	▲	●									
	CNMG120404-OKM	12.9	12.7	4.76	5.16	0.4									▲	▲						
	CNMG120408-OKM	12.9	12.7	4.76	5.16	0.8									▲	▲						
	CNMG120412-OKM	12.9	12.7	4.76	5.16	1.2									▲	▲						
	CNMG120408-OSM	12.9	12.7	4.76	5.16	0.8														●		
	CNMG120412-OSM	12.9	12.7	4.76	5.16	1.2														●		
	CNMG120408-SMM	12.9	12.7	4.76	5.16	0.8														▲	▲	
	CNMG120404-SMM	12.9	12.7	4.76	5.16	0.4														▲	▲	

Semi Finishing

# Turning Insert (Negative) CN□□

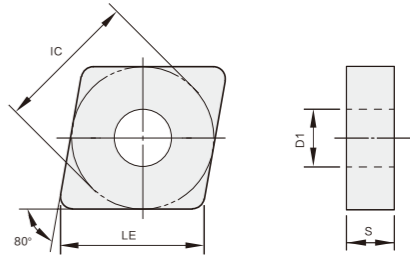


Insert Shape	Type	Dimension					P				M			K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	CNMG120408-OPR	12.9	12.7	4.76	5.16	0.8	●	●	▲													
	CNMG120412-OPR	12.9	12.7	4.76	5.16	1.2	●	●	▲													
	CNMG120416-OPR	12.9	12.7	4.76	5.16	1.6	●	●	▲													
	CNMG160608-OPR	16.1	15.875	6.35	6.35	0.8	●	●	▲													
	CNMG160612-OPR	16.1	15.875	6.35	6.35	1.2	●	●	▲													
	CNMG160616-OPR	16.1	15.875	6.35	6.35	1.6	●	●	▲													
	CNMG190608-OPR	19.3	19.05	6.35	7.94	0.8	●	●	▲	▲												
	CNMG190612-OPR	19.3	19.05	6.35	7.94	1.2	●	●	▲	▲												
	CNMG190616-OPR	19.3	19.05	6.35	7.94	1.6	●	●	▲	▲												
	CNMG120408-OMR	12.9	12.7	4.76	5.16	0.8					●	▲	●									
	CNMG120412-OMR	12.9	12.7	4.76	5.16	1.2					●	▲	●									
	CNMG120408-OKR	12.9	12.7	4.76	5.16	0.8									▲	▲						
	CNMG120412-OKR	12.9	12.7	4.76	5.16	1.2									▲	▲						
	CNMG120416-OKR	12.9	12.7	4.76	5.16	1.6									▲	▲						
	CNMG160612-OKR	16.1	15.8	6.35	6.35	1.2									▲	▲						
	CNMM190616-PR	19.3	19.05	6.35	7.94	1.6	●	●	▲													
	CNMM250924-PR	25.8	25.4	9.72	9.12	2.4					▲											
	CNMM250724-PR	25.8	25.4	7.94	9.12	2.4					▲											

Roughing

Heavy Duty Machining

▲ Featured grade ● Optional grade


# Turning Insert (Negative) CN□□

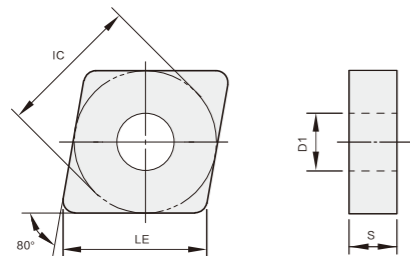

Insert Shape	Type	Dimension					P				M				K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	Semi-Finishing	CNMG120404	12.9	12.7	4.76	5.16	0.4	●	●	▲							▲						
		CNMG120408	12.9	12.7	4.76	5.16	0.8	●	●	▲							▲						
		CNMG120412	12.9	12.7	4.76	5.16	1.2	●	●	▲							▲						
		CNMG160608	16.1	15.875	6.35	6.35	0.8	●	●	▲							▲						
		CNMG160612	16.1	15.875	6.35	6.35	1.2	●	●	▲							▲						
		CNMG160616	16.1	15.875	6.35	6.35	1.6	●	●	▲							▲						
		CNMG190608	19.3	19.05	6.35	7.94	0.8	●	●	▲							▲						
		CNMG190612	19.3	19.05	6.35	7.94	1.2	●	●	▲							▲						
		CNMG190616	19.3	19.05	6.35	7.94	1.6	●	●	▲							▲						
	Roughing	CNMA120404	12.9	12.7	4.76	5.16	0.4									▲							
		CNMA120408	12.9	12.7	4.76	5.16	0.8									▲							
		CNMA120412	12.9	12.7	4.76	5.16	1.2									▲							
		CNMA120416	12.9	12.7	4.76	5.16	1.6									▲							
		CNMA160608	16.1	15.875	6.35	6.35	0.8									▲							
		CNMA160612	16.1	15.875	6.35	6.35	1.2									▲							
		CNMA160616	16.1	15.875	6.35	6.35	1.6									▲							
		CNMA190612	19.3	19.05	6.35	7.94	1.2									▲							
		CNMA190616	19.3	19.05	6.35	7.94	1.6									▲							


▲Featured grade ●Optional grade

# Turning Insert (Negative) DN□□

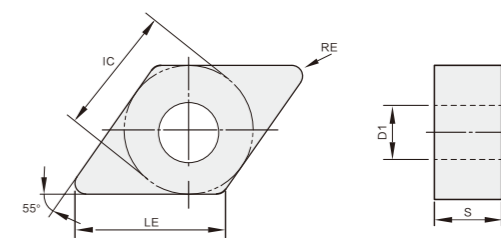


Insert Shape	Type	Dimension					P				M				K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	Finishing	DNMG110404-OPF	11.6	9.525	4.76	3.81	0.4	●	●	▲													
		DNMG110408-OPF	11.6	9.525	4.76	3.81	0.8	●	●	▲													
		DNMG150404-OPF	15.5	12.7	4.76	5.16	0.4	●	●	▲													
		DNMG150408-OPF	15.5	12.7	4.76	5.16	0.8	●	●	▲													
		DNMG150604-OPF	15.5	12.7	6.35	5.16	0.4	●	●	▲													
		DNMG150608-OPF	15.5	12.7	6.35	5.16	0.8	●	●	▲													
	Finishing	DNMG150604-OMF	15.5	12.7	6.35	5.16	0.4						●	▲	●								
		DNMG150608-OMF	15.5	12.7	6.35	5.16	0.8						●	▲	●								
	Finishing	DNMG110404-MSF	11.6	9.525	4.76	3.81	0.4						●	▲	●								
		DNMG150404-MSF	15.5	12.7	4.76	5.16	0.4						●	▲	●								
	Semi-Finishing	DNMG110404-OPM	11.6	9.525	4.76	3.81	0.4	●		▲													
		DNMG110408-OPM	11.6	9.525	4.76	3.81	0.8	●		▲													
		DNMG110412-OPM	11.6	9.525	4.76	3.81	1.2	●		▲													
		DNMG150404-OPM	15.5	12.7	4.76	5.16	0.4	●		▲													
		DNMG150408-OPM	15.5	12.7	4.76	5.16	0.8	●		▲													
		DNMG150412-OPM	15.5	12.7	4.76	5.16	1.2	●		▲													
		DNMG150604-OPM	15.5	12.7	6.35	5.16	0.4	●		▲													
		DNMG150608-OPM	15.5	12.7	6.35	5.16	0.8	●		▲													
	Semi-Finishing	DNMG150612-OPM	15.5	12.7	6.35	5.16	1.2	●		▲													
		DNMG110404-OMM	11.6	9.525	4.76	3.81	0.4						●	▲	●								
		DNMG110408-OMM	11.6	9.525	4.76	3.81	0.8						●	▲	●								
		DNMG150404-OMM	15.5	12.7	4.76	5.16	0.4						●	▲	●								
		DNMG150408-OMM	15.5	12.7	4.76	5.16	0.8						●	▲	●								
		DNMG150604-OMM	15.5	12.7	6.35	5.16	0.4						●	▲	●								
		DNMG150608-OMM	15.5	12.7	6.35	5.16	0.8						●	▲	●								
		DNMG150612-OMM	15.5	12.7	6.35	5.16	1.2						●	▲	●								
	Semi-Finishing	DNMG110408-MF	11.6	9.525	4.76	3.81	0.8						●	▲	●								
		DNMG150408-MF	15.5	12.7	4.76	5.16	0.8						●	▲	●								
		DNMG150608-MF	15.5	12.7	6.35	5.16	0.8						●	▲	●								

# Turning Insert (Negative) DN□□

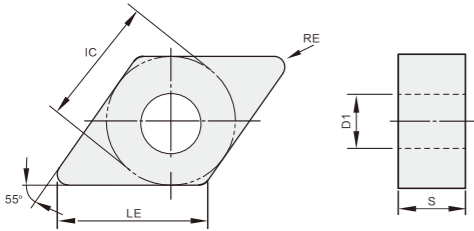

Insert Shape	Type	Dimension					P		M		K		S										
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	DNMG150404-OKM	15.5	12.7	4.76	5.16	0.4									▲	▲							
	DNMG150408-OKM	15.5	12.7	4.76	5.16	0.8									▲	▲							
	DNMG150604-OKM	15.5	12.7	6.35	5.16	0.4									▲	▲							
	DNMG150608-OKM	15.5	12.7	6.35	5.16	0.8									▲	▲							
	DNMG150612-OKM	15.5	12.7	6.35	5.16	1.2									▲	▲							
	DNMG150608-OSM	15.5	12.7	6.35	5.16	0.8																●	
	DNMG150408-OPR	15.5	12.7	4.76	5.16	0.8	●	●	▲														
	DNMG150412-OPR	15.5	12.7	4.76	5.16	1.2	●	●	▲														
	DNMG150608-OPR	15.5	12.7	6.35	5.16	0.8	●	●	▲														
	DNMG150612-OPR	15.5	12.7	6.35	5.16	1.2	●	●	▲														
	DNMG150616-OPR	15.5	12.7	6.35	5.16	1.6	●	●	▲														
	DNMG150408-OKR	15.5	12.7	4.76	5.16	0.8									▲	▲							
	DNMG150412-OKR	15.5	12.7	4.76	5.16	1.2									▲	▲							
	DNMG150608-OKR	15.5	12.7	6.35	5.16	0.8									▲	▲							
	DNMG150612-OKR	15.5	12.7	6.35	5.16	1.2									▲	▲							
	DNMG110408	11.6	9.525	4.76	3.81	0.8	●	●	▲						▲								
	DNMG150404	15.5	12.7	4.76	5.16	0.4	●	●	▲						▲								
	DNMG150408	15.5	12.7	6.35	5.16	0.8	●	●	▲						▲								
	DNMG150412	15.5	12.7	6.35	5.16	1.2	●	●	▲						▲								
	DNMG150608	15.5	12.7	6.35	5.16	0.8	●	●	▲						▲								
DNMG150612	15.5	12.7	6.35	5.16	1.2	●	●	▲						▲									
	DNMA150404	15.5	12.7	4.76	5.16	0.4									▲								
	DNMA150408	15.5	12.7	4.76	5.16	0.8									▲								
	DNMA150604	15.5	12.7	6.35	5.16	0.4									▲								
	DNMA150608	15.5	12.7	6.35	5.16	0.8									▲								
	DNMA150612	15.5	12.7	6.35	5.16	1.2									▲								


# Turning Insert (Negative) SN□□

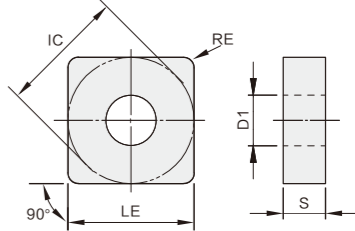

Insert Shape	Type	Dimension					P		M		K		S										
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	SNMG120404-OPF	12.7	12.7	4.76	5.16	0.4	●	●	▲														
	SNMG120408-OPF	12.7	12.7	4.76	5.16	0.8	●	●	▲														
	SNMG120408-OMF	12.7	12.7	4.76	5.16	0.8							●	▲	●								
	SNMG120404-OPM	12.7	12.7	4.76	5.16	0.4	●	▲															
	SNMG120408-OPM	12.7	12.7	4.76	5.16	0.8	●	▲															
	SNMG120412-OPM	12.7	12.7	4.76	5.16	1.2	●	▲															
	SNMG150608-OPM	15.875	15.875	6.35	6.35	0.8	●	▲															
	SNMG150612-OPM	15.875	15.875	6.35	6.35	1.2	●	▲															
	SNMG190612-OPM	19.05	19.05	6.35	7.94	1.2	●	▲															
	SNMG120404-OMM	12.7	12.7	4.76	5.16	0.4							●	▲	●								
	SNMG120408-OMM	12.7	12.7	4.76	5.16	0.8							●	▲	●								
	SNMG120412-OMM	12.7	12.7	4.76	5.16	1.2							●	▲	●								
	SNMG150608-OMM	15.875	15.875	6.35	6.35	0.8							●	▲	●								
	SNMG120408-MF	12.7	12.7	4.76	5.16	0.8							●	▲	●								


▲ Featured grade ● Optional grade

# Turning Insert (Negative) SN□□

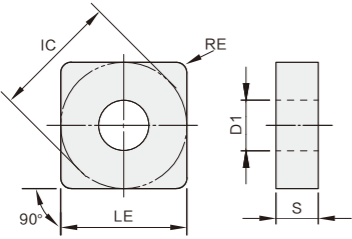

Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	SNMG120404-OKM	12.7	12.7	4.76	5.16	0.4										▲	▲					
	SNMG120408-OKM	12.7	12.7	4.76	5.16	0.8										▲	▲					
	SNMG120412-OKM	12.7	12.7	4.76	5.16	1.2										▲	▲					
	SNMG120408-OSM	12.7	12.7	4.76	5.16	0.8														●		
	SNMG120408-SMM	12.7	12.7	4.76	5.16	0.8										▲	▲					
	SNMG120408-OPR	12.7	12.7	4.76	5.16	0.8	●	●	▲													
	SNMG120412-OPR	12.7	12.7	4.76	5.16	1.2	●	●	▲													
	SNMG150608-OPR	15.875	15.875	6.35	6.35	0.8	●	●	▲													
	SNMG150612-OPR	15.875	15.875	6.35	6.35	1.2	●	●	▲													
	SNMG150616-OPR	15.875	15.875	6.35	6.35	1.6	●	●	▲													
	SNMG190612-OPR	19.05	19.05	6.35	7.94	1.2	●	●	▲													
	SNMG190616-OPR	19.05	19.05	6.35	7.94	1.6	●	●	▲													
	SNMM190624-OPR	19.05	19.05	6.35	7.94	2.4	●	●	▲													
	SNMG120408-OKR	12.7	12.7	4.76	5.16	0.8										▲	▲					
	SNMG120412-OKR	12.7	12.7	4.76	5.16	1.2										▲	▲					
	SNMG120416-OKR	12.7	12.7	4.76	5.16	1.6										▲	▲					
	SNMG150616-OKR	15.875	15.875	6.35	6.35	1.6										▲	▲					
	SNMG190612-OKR	19.05	19.05	6.35	7.94	1.2										▲	▲					


# Turning Insert (Negative) SN□□

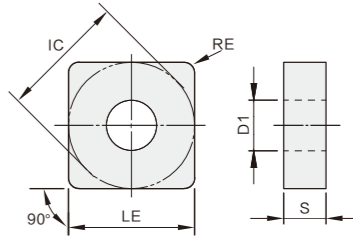

Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	SNMM250724-PR	25.4	25.4	9.525	9.12	2.4					▲											
	SNMM250924-PR	25.4	25.4	9.525	9.12	2.4					▲											
	SNMG120404	12.7	12.7	4.76	5.16	0.4	●	●	▲										▲			
	SNMG120408	12.7	12.7	4.76	5.16	0.8	●	●	▲										▲			
	SNMG120412	12.7	12.7	4.76	5.16	1.2	●	●	▲										▲			
	SNMG120416	12.7	12.7	4.76	5.16	1.6	●	●	▲										▲			
	SNMG150608	15.875	15.875	6.35	6.35	0.8	●	●	▲										▲			
	SNMG150612	15.875	15.875	6.35	6.35	1.2	●	●	▲										▲			
	SNMG190612	19.05	19.05	6.35	7.94	1.2	●	●	▲										▲			
	SNMG190616	19.05	19.05	6.35	7.94	1.6	●	●	▲										▲			
	SNMG250724	25.4	25.4	7.94	9.12	2.4	●	●	▲										▲			
	SNMG250924	25.4	25.4	9.525	9.12	2.4	●	●	▲										▲			
	SNMA120408	12.7	12.7	4.76	5.16	0.8													▲			
	SNMA120412	12.7	12.7	4.76	5.16	1.2													▲			
	SNMA120416	12.7	12.7	4.76	5.16	1.6													▲			

▲Featured grade ●Optional grade


# Turning Insert (Negative) TN□□



Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	TNMG160404-OPF	16.5	9.525	4.76	3.81	0.4	●	●	▲													
	TNMG160408-OPF	16.5	9.525	4.76	3.81	0.8	●	●	▲													
	TNMG160404-OMF	16.5	9.525	4.76	3.81	0.4					●	▲	●									
	TNMG160408-OMF	16.5	9.525	4.76	3.81	0.8					●	▲	●									
	TNMG160404-MSF	16.5	9.525	4.76	3.81	0.4					●	▲	●									
	TNMG160408-MSF	16.5	9.525	4.76	3.81	0.8					●	▲	●									

Finishing

# Turning Insert (Negative) TN□□




Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	TNMG160404-OPM	16.5	9.525	4.76	3.81	0.4	●		▲													
	TNMG160408-OPM	16.5	9.525	4.76	3.81	0.8	●		▲													
	TNMG160412-OPM	16.5	9.525	4.76	3.81	1.2	●		▲													
	TNMG220404-OPM	22	12.7	4.76	5.16	0.4	●		▲													
	TNMG220408-OPM	22	12.7	4.76	5.16	0.8	●		▲													
	TNMG220412-OPM	22	12.7	4.76	5.16	1.2	●		▲													
	TNMG220416-OPM	22	12.7	4.76	5.16	1.6	●		▲													
	TNMG160404-OMM	16.5	9.525	4.76	3.81	0.4					●	▲	●									
	TNMG160408-OMM	16.5	9.525	4.76	3.81	0.8					●	▲	●									
	TNMG220404-OMM	22	12.7	4.76	5.16	0.4					●	▲	●									
	TNMG220408-OMM	22	12.7	4.76	5.16	0.8					●	▲	●									
	TNMG220412-OMM	22	12.7	4.76	5.16	1.2					●	▲	●									
	TNMG160404-MF	16.5	9.525	4.76	3.81	0.4					●	▲	●									
	TNMG160408-MF	16.5	9.525	4.76	3.81	0.8					●	▲	●									
	TNMG160412-MF	16.5	9.525	4.76	3.81	1.2					●	▲	●									
	TNMG220404-MF	22	12.7	4.76	5.16	0.4					●	▲	●									
	TNMG220408-MF	22	12.7	4.76	5.16	0.8					●	▲	●									
	TNMG160404-OKM	16.5	9.525	4.76	3.81	0.4												▲	▲			
	TNMG160408-OKM	16.5	9.525	4.76	3.81	0.8												▲	▲			
	TNMG160412-OKM	16.5	9.525	4.76	3.81	1.2												▲	▲			
	TNMG160408-SMM	16.5	9.525	4.76	3.81	0.8															▲	▲

Semi Finishing


▲Featured grade ●Optional grade

# Turning Insert (Negative) TN□□



Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	TNMG160408-OPR	16.5	9.525	4.76	3.81	0.8	●	●	▲													
	TNMG160412-OPR	16.5	9.525	4.76	3.81	1.2	●	●	▲													
	TNMG220408-OPR	22	12.7	4.76	5.16	0.8	●	●	▲													
	TNMG220412-OPR	22	12.7	4.76	5.16	1.2	●	●	▲													
	TNMG220416-OPR	22	12.7	4.76	5.16	1.6	●	●	▲													
	TNMG270612-OPR	27.5	15.875	6.35	6.35	1.2	●	●	▲													
	TNMG160408-OMR	16.5	9.525	4.76	3.81	0.8					●	▲	●									
	TNMG160408-OKR	16.5	9.525	4.76	3.81	0.8									▲		▲					
	TNMG160412-OKR	16.5	9.525	4.76	3.81	1.2									▲		▲					


# Turning Insert (Negative) TN□□



Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	TNMG160404	16.5	9.525	4.76	3.81	0.8	●	●	▲													
	TNMG160408	16.5	9.525	4.76	3.81	1.2	●	●	▲													
	TNMG160412	22	12.7	4.76	5.16	0.4	●	●	▲													
	TNMG220408	22	12.7	4.76	5.16	0.8	●	●	▲													
	TNMG220412	22	12.7	4.76	5.16	1.2	●	●	▲													
	TNMG220416	22	12.7	4.76	5.16	1.6	●	●	▲													
	TNMA160404	16.5	9.525	4.76	3.81	0.4																
	TNMA160408	16.5	9.525	4.76	3.81	0.8																
	TNMA160412	16.5	9.525	4.76	3.81	1.2																
	TNMA220408	22	12.7	4.76	5.16	0.8																


▲ Featured grade ● Optional grade

# Turning Insert (Negative) VN□□

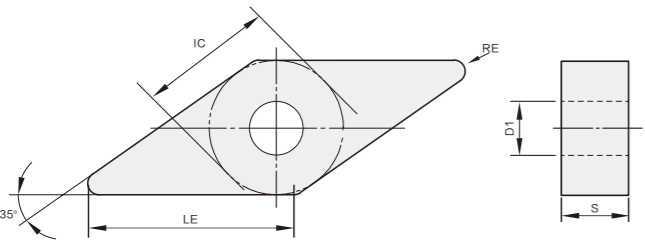

Insert Shape	Type	Dimension					P			M			K		S							
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	VNMG160404-OPF	16.6	9.525	4.76	3.81	0.4	●	●	▲													
	VNMG160408-OPF	16.6	9.525	4.76	3.81	0.8	●	●	▲													
	VNMG160404-MSF	16.6	9.525	4.76	3.81	0.4					●	▲	●									
	VNMG160404-OPM	16.6	9.525	4.76	3.81	0.4	●		▲													
	VNMG160408-OPM	16.6	9.525	4.76	3.81	0.8	●		▲													
	VNMG160412-OPM	16.6	9.525	4.76	3.81	1.2	●		▲													
	VNMG160404-OMM	16.6	9.525	4.76	3.81	0.4					●	▲	●									
	VNMG160408-OMM	16.6	9.525	4.76	3.81	0.8					●	▲	●									
	VNMG160408-MF	16.6	9.525	4.76	3.81	0.8					●	▲	●									


# Turning Insert (Negative) VN□□

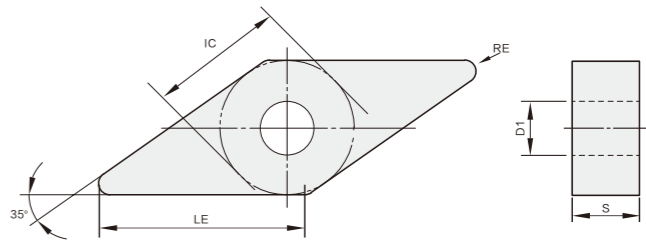

Insert Shape	Type	Dimension					P			M			K		S							
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	VNMG160404-OKM	16.6	9.525	4.76	3.81	0.4																
	VNMG160408-OKM																					
	VNMG160408-SMM	16.6	9.525	4.76	3.81	0.8																


▲ Featured grade ● Optional grade

# Turning Insert (Negative) VN□□

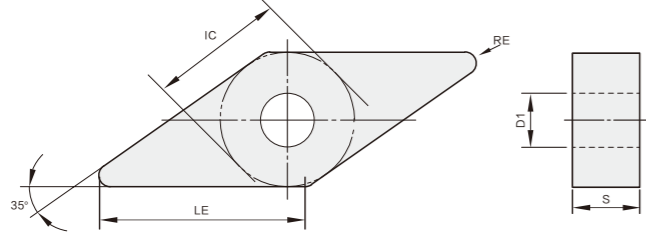

Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	VNMG160408-OPR	16.6	9.525	4.76	3.81	0.4	●	●	▲													
	VNMG160412-OPR	16.6	9.525	4.76	3.81	0.8	●	●	▲													
	VNMG160408-OKR	16.6	9.525	4.76	3.81	0.4									▲		▲					
	VNMG160412-OKR	16.6	9.525	4.76	3.81	0.8									▲		▲					
	VNMG160404	16.6	9.525	4.76	3.81	0.4	●	●	▲								▲					
	VNMG160408	16.6	9.525	4.76	3.81	0.8	●	●	▲								▲					
	VNMG160412	16.6	9.525	4.76	3.81	1.2	●	●	▲								▲					
	VNMA160408	16.6	9.525	4.76	3.81	0.8											▲					


# Turning Insert (Negative) WN□□

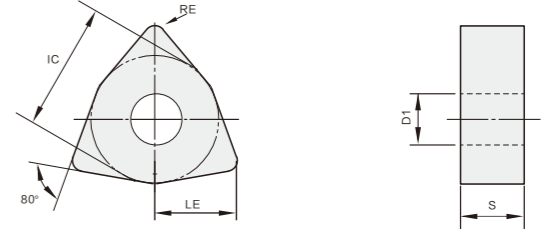

Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	WNMG060404-OPF	6.5	9.525	4.76	3.81	0.4	●	●	▲													
	WNMG060408-OPF	6.5	9.525	4.76	3.81	0.8	●	●	▲													
	WNMG060408-OMF	6.5	9.525	4.76	3.81	0.8							●	▲	●							
	WNMG080404-OMF	8.7	12.7	4.76	5.16	0.4							●	▲	●							
	WNMG080408-OMF	8.7	12.7	4.76	5.16	0.8							●	▲	●							
	WNMG060304-MSF	6.5	9.525	3.18	3.81	0.4							●	▲	●							
	WNMG060404-MSF	6.5	9.525	4.76	3.81	0.4							●	▲	●							
	WNMG080404-MSF	8.7	12.7	4.76	5.16	0.4							●	▲	●							
	WNMG060408-OPM	6.5	9.525	4.76	3.81	0.8	●		▲													
	WNMG080404-OPM	8.7	12.7	4.76	5.16	0.4	●		▲													
	WNMG080408-OPM	8.7	12.7	4.76	5.16	0.8	●		▲													
	WNMG080412-OPM	8.7	12.7	4.76	5.16	1.2	●		▲													
	WNMG060408-OMM	6.5	9.525	4.76	3.81	0.8							●	▲	●							
	WNMG060412-OMM	6.5	9.525	4.76	3.81	1.2							●	▲	●							
	WNMG080404-OMM	8.7	12.7	4.76	5.16	0.4							●	▲	●							
	WNMG080408-OMM	8.7	12.7	4.76	5.16	0.8							●	▲	●							
	WNMG060408-MF	6.5	9.525	4.76	3.81	0.8							●	▲	●							
	WNMG080408-MF	8.7	12.7	4.76	5.16	0.8							●	▲	●							
	WNMG080412-MF	8.7	12.7	4.76	5.16	1.2							●	▲	●							


▲ Featured grade ● Optional grade

# Turning Insert (Negative) WN□□

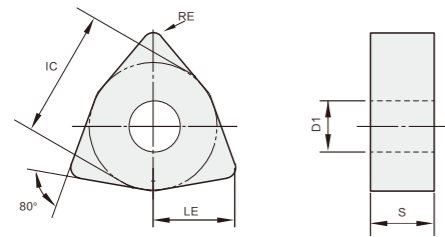

Insert Shape	Type	Dimension					P					M			K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	WNMG080404-OKM	8.7	12.7	4.76	5.16	0.4																	
	WNMG080408-OKM	8.7	12.7	4.76	5.16	0.8										▲	▲						
	WNMG080412-OKM	8.7	12.7	4.76	5.16	1.2										▲	▲						
	WNMG080408-SMM	8.7	12.7	4.76	5.16	0.8															▲	▲	
	WNMG080408-OPR	8.7	12.7	4.76	5.16	0.8	●	●	▲														
	WNMG080412-OPR	8.7	12.7	4.76	5.16	1.2	●	●	▲														
	WNMG080408-OMR	8.7	12.7	4.76	5.16	0.8					●	▲	●										
	WNMG080412-OMR	8.7	12.7	4.76	5.16	1.2					●	▲	●										
	WNMG080408-OKR	8.7	12.7	4.76	5.16	0.8										▲	▲						
	WNMG080412-OKR	8.7	12.7	4.76	5.16	1.2										▲	▲						
	WNMG080404	8.7	12.7	4.76	5.16	0.4	●	●	▲													▲	
	WNMG080408	8.7	12.7	4.76	5.16	0.8	●	●	▲													▲	
	WNMG080412	8.7	12.7	4.76	5.16	1.2	●	●	▲													▲	
	WNMA080408	8.7	12.7	4.76	5.16	0.8																▲	
	WNMA080412	8.7	12.7	4.76	5.16	1.2																▲	


# Turning Insert (Positive) CC□□

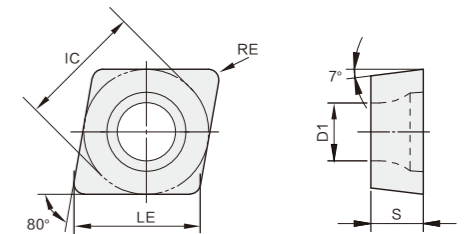

Insert Shape	Type	Dimension					P					M			K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	CCMT060202-OTF	6.4	6.35	2.38	2.8	0.2	▲					●	▲	●									
	CCMT060204-OTF	6.4	6.35	2.38	2.8	0.4	▲					●	▲	●									
	CCMT09T304-OTF	9.7	9.525	3.97	4.4	0.4	▲					●	▲	●									
	CCMT09T308-OTF	9.7	9.525	3.97	4.4	0.8	▲					●	▲	●									
	CCMT120404-OTF	12.9	12.7	4.76	5.5	0.4	▲					●	▲	●									
	CCMT120408-OTF	12.9	12.7	4.76	5.5	0.8	▲					●	▲	●									
	CCMT060202-MSF	6.4	6.35	2.38	2.8	0.2						●	▲	●									
	CCMT060204-MSF	6.4	6.35	2.38	2.8	0.4						●	▲	●									
	CCMT09T302-MSF	9.7	9.525	3.97	4.4	0.2						●	▲	●									
	CCMT09T304-MSF	9.7	9.525	3.97	4.4	0.4						●	▲	●									
	CCMT09T308-MSF	12.9	12.7	4.76	5.5	0.8						●	▲	●									
	CCMT120404-MSF	12.9	12.7	4.76	5.5	0.4						●	▲	●									
	CCMT060204-OTM	6.4	6.35	2.38	2.8	0.4	●	●	▲			●	▲	●									
	CCMT060208-OTM	6.4	6.35	2.38	2.8	0.8	●	●	▲			●	▲	●									
	CCMT09T304-OTM	9.7	9.525	3.97	4.4	0.4	●	●	▲			●	▲	●									
	CCMT09T308-OTM	9.7	9.525	3.97	4.4	0.8	●	●	▲			●	▲	●									
	CCMT120404-OTM	12.9	12.7	4.76	5.5	0.4	●	●	▲			●	▲	●									
	CCMT120408-OTM	12.9	12.7	4.76	5.5	0.8	●	●	▲			●	▲	●									
	CCMT060208-OTR	6.4	6.35	2.38	2.8	0.8	●	●	▲													▲	
	CCMT09T304-OTR	9.7	9.525	3.97	4.4	0.4	●	●	▲													▲	
	CCMT09T308-OTR	9.7	9.525	3.97	4.4	0.8	●	●	▲													▲	
	CCMT120408-OTR	12.9	12.7	4.76	5.5	0.8	●	●	▲													▲	
	CCMT120412-OTR	12.9	12.7	4.76	5.5	1.2	●	●	▲													▲	


▲ Featured grade ● Optional grade

# Turning Insert (Positive) DC□□

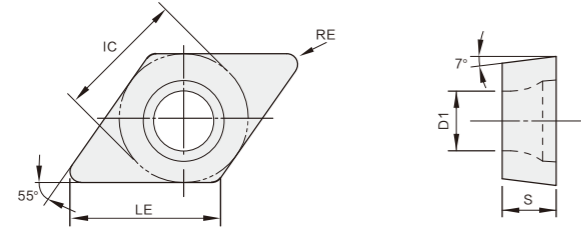

Insert Shape	Type	Dimension					P				M			K		S							
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	DCMT070204-OTF	7.8	6.35	2.38	2.8	0.4	▲					●	▲	●									
	DCMT11T302-OTF	11.6	9.525	3.97	4.4	0.2	▲					●	▲	●									
	DCMT11T304-OTF	11.6	9.525	3.97	4.4	0.4	▲					●	▲	●									
	DCMT070204-MSF	7.8	6.35	2.38	2.8	0.4						●	▲	●									
	DCMT11T304-MSF	11.6	9.525	3.97	4.4	0.4						●	▲	●									
	DCMT070204-OTM	7.8	6.35	2.38	2.8	0.4	●	●	●	▲		●	▲	●									
	DCMT070208-OTM	7.8	6.35	2.38	2.8	0.8	●	●	●	▲		●	▲	●									
	DCMT11T304-OTM	11.6	9.525	3.97	4.4	0.4	●	●	●	▲		●	▲	●									
	DCMT11T308-OTM	11.6	9.525	3.97	4.4	0.8	●	●	●			●	▲	●									
	DCMT11T304-OTR	11.6	9.525	3.97	4.4	0.4	●	●	●	▲		●	▲	●									
	DCMT11T308-OTR	11.6	9.525	3.97	4.4	0.8	●	●	●	▲		●	▲	●									


# Turning Insert (Positive) RC□□

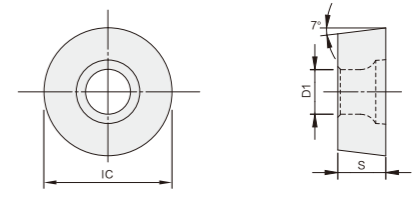

Insert Shape	Type	Dimension					P				M			K		S							
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	RCMX0803MO	8.0	8.0	3.18	3.4		▲	●															
	RCMX1003MO	10	10	3.18	3.6		▲	●															
	RCMX1204MO-Q	12	12	4.76	4.4		▲	●															
	RCMX1606MO-Q	16	16	6.35	5.5		▲	●															
	RCMX2006MO-Q	20	20	6.35	6.5		▲	●															
	RCMX2507MO-Q	25	25	7.94	7.2		▲	●															
	RCMX3209MO-Q	32	32	9.52	9.5		▲	●															
	RCMT0803MO	8.0	8.0	3.18	3.4		▲	●															
	RCMT1606MO-Q	16	16	6.35	5.5		▲	●															


▲Featured grade ●Optional grade

# Turning Insert (Positive) SC□□

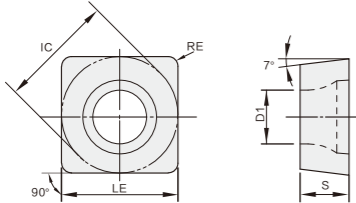

Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	Finishing																					
	SCMT09T304-OTF	9.525	9.525	3.97	4.4	0.4	●				●	▲	●									
	SCMT09T308-OTF	9.525	9.525	3.97	4.4	0.8	●				●	▲	●									
SCMT120404-OTF	12.7	12.7	4.76	5.5	0.4	●				●	▲	●										
	Semi Finishing																					
	SCMT09T304-OTM	9.525	9.525	3.97	4.4	0.4	●	●	●	▲	●	▲	●									
	SCMT09T308-OTM	9.525	9.525	3.97	4.4	0.8	●	●	●	▲	●	▲	●									
	SCMT120404-OTM	12.7	12.7	4.76	5.5	0.4	●	●	●	▲	●	▲	●									
	SCMT120408-OTM	12.7	12.7	4.76	5.5	0.8	●	●	●	▲	●	▲	●									
SCMT120412-OTM	12.7	12.7	4.76	5.5	1.2	●	●	●	▲	●	▲	●										
	Roughing																					
	SCMT09T304-OTR	9.525	9.525	3.97	4.4	0.4	●	●	●	▲						▲						
	SCMT09T308-OTR	9.525	9.525	3.97	4.4	0.8	●	●	●	▲						▲						
	SCMT120404-OTR	12.7	12.7	4.76	5.5	0.4	●	●	●	▲						▲						
	SCMT120408-OTR	12.7	12.7	4.76	5.5	0.8	●	●	●	▲						▲						
SCMT120412-OTR	12.7	12.7	4.76	5.5	1.2	●	●	●	▲						▲							


# Turning Insert (Positive) TC□□



Insert Shape	Type	Dimension					P					M			K		S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	Finishing																					
	TCMT110202-OTF	11	6.35	2.38	2.8	0.2	▲					●	▲	●								
	TCMT110204-OTF	11	6.35	2.38	2.8	0.4	▲					●	▲	●								
	TCMT16T304-OTF	16.5	9.525	3.97	4.4	0.4	▲					●	▲	●								
	TCMT16T308-OTF	16.5	9.525	3.97	4.4	0.8	▲					●	▲	●								
	Semi Finishing																					
	TCMT090204-OTM	9.6	5.56	2.38	2.5	0.4	●	●	●	▲	●	▲	●									
	TCMT090208-OTM	9.6	5.56	2.38	2.5	0.8	●	●	●	▲	●	▲	●									
	TCMT110204-OTM	11	6.35	2.38	2.8	0.4	●	●	●	▲	●	▲	●									
	TCMT110208-OTM	11	6.35	2.38	2.8	0.8	●	●	●	▲	●	▲	●									
	TCMT16T304-OTM	16.5	9.525	3.97	4.4	0.4	●	●	●	▲	●	▲	●									
	TCMT16T308-OTM	16.5	9.525	3.97	4.4	0.8	●	●	●	▲	●	▲	●									
TCMT16T312-OTM	16.5	9.525	3.97	4.4	1.2	●	●	●	▲	●	▲	●										
	Roughing																					
	TCMT16T308-OTR	16.5	9.525	3.97	4.4	0.8	●	●	●	▲						▲						
TCMT220408-OTR	22	12.7	4.76	5.5	0.8	●	●	●	▲						▲							

▲Featured grade ●Optional grade


# Turning Insert (Positive) VB□□

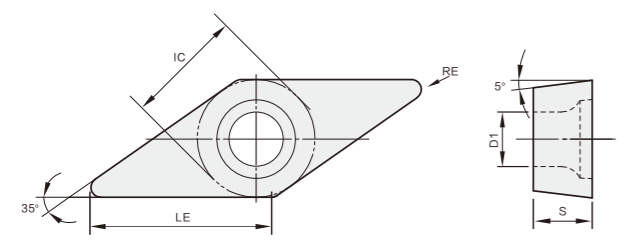

Insert Shape	Type	Dimension					P					M			K			S				
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	VBMT160404-OTF	16.5	9.525	4.76	4.4	0.4	▲					●	▲	●								
	VBMT160408-OTF	16.5	9.525	4.76	4.4	0.8	▲					●	▲	●								
	VBMT110304-OTM	11	6.35	3.18	2.8	0.4	●	●	●	▲		●	▲	●								
	VBMT160404-OTM	16.5	9.525	4.76	4.4	0.4	●	●	●	▲		●	▲	●								
	VBMT160408-OTM	16.5	9.525	4.76	4.4	0.8	●	●	●	▲		●	▲	●								
	VBMT160412-OTM	16.5	9.525	4.76	4.4	1.2	●	●	●	▲		●	▲	●								
	VBMT160404-OMM	16.5	9.525	4.76	4.4	0.4						●	▲	●								
	VBMT160404-OSM	16.5	9.525	4.76	4.4	0.4														●	▲	▲
	VBMT160408-OSM	16.5	9.525	4.76	4.4	0.8														●	▲	▲
	VBMT160404-OTR	16.5	9.525	4.76	4.4	0.4	●	●	●	▲							▲					
	VBMT160408-OTR	16.5	9.525	4.76	4.4	0.8	●	●	●	▲							▲					

▲ Featured grade ● Optional grade


# Turning Insert (Positive) VC□□

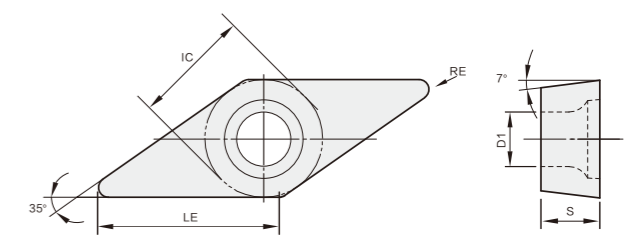


Insert Shape	Type	Dimension					P					M			K			S					
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215		
	VCMT110302-OTF	11	6.35	3.18	2.8	0.2	▲					●	▲	●									
	VCMT110304-OTF	11	6.35	3.18	2.8	0.4	▲					●	▲	●									
	VCMT160404-OTF	16.5	9.525	4.76	4.4	0.4	▲					●	▲	●									
	VCMT160404-OTM	16.5	9.525	4.76	4.4	0.4	▲					●	▲	●									
	VCMT160408-OTM	16.5	9.525	4.76	4.4	0.8	▲					●	▲	●									
	VCMT160408-OSM	16.5	9.525	4.76	4.4	0.8															●	▲	▲


▲ Featured grade ● Optional grade


# Turning Insert (Positive) TB□□ TP□□

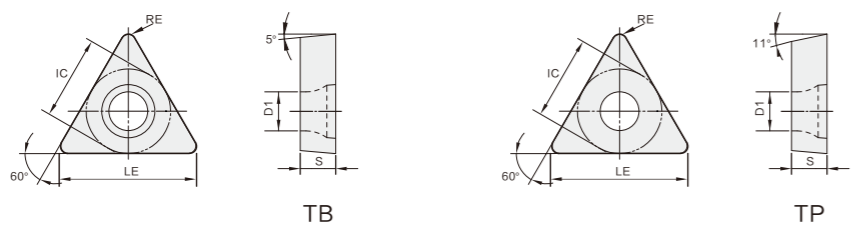

Insert Shape	Type	Dimension					P					M			K		S						
		LE	IC	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1205H	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	TBGH060202L	6.4	3.97	2.38	2.3	0.2						▲											
	TPGH080202L	8.2	4.76	2.38	2.4	0.2						▲											
	TPGH080204L	8.2	4.76	2.38	2.4	0.4						▲											
	TPGH090202L	9.6	5.56	2.38	2.8	0.2						▲											
	TPGH090204L	9.6	5.56	2.38	2.8	0.4						▲											
	TPGH110302L	11	6.35	3.18	3.18	0.2						▲											
	TPGH110304L	11	6.35	3.18	3.18	0.4						▲											


# Turning Insert (Positive) KN□□

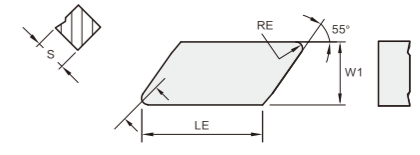


Insert Shape	Type	Dimension					P					M			K		S					
		LE	W1	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220	OP6105A	OP6115A	OP6215	
	KNUX160405L11	16.2	9.525	4.76	2.2	0.5	▲	●														
	KNUX160405R11	16.2	9.525	4.76	2.2	0.5	▲	●														

▲ Featured grade ● Optional grade


# Train Wheel Hub Machining






Insert Shape	Type	Dimension					P					M				K		
		LE	W1	S	D1	RE	OC2415	OC2125	OC2325	OC2325S	OC2425	OP1215	OP1315	OP1415	OC4315	OC3210	OC3215	OC3220
	175.32-191940-22	19.1	10	19.1	6.35	4.0				▲								
	175.32-191940-28	19.1	10	19.1	6.35	4.0				▲								

Heavy Duty Machining

# Insert for Aluminum Cutting CC□□ DC□□ RC□□

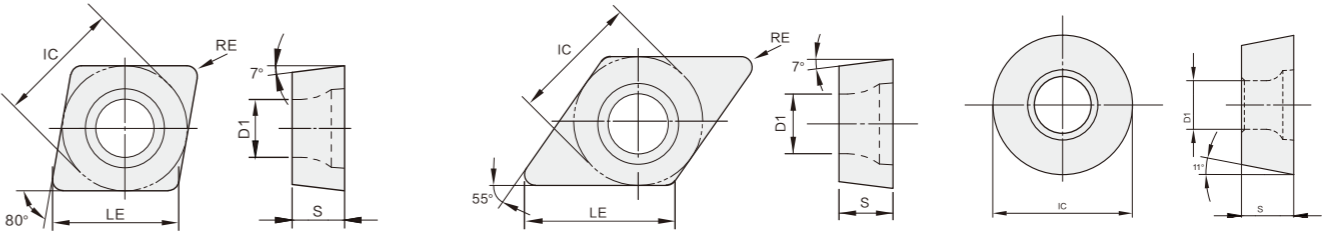


Insert Shape	Type	Dimension					N
		LE	IC	S	D1	RE	
	CCGX060202-NL	6.4	6.35	2.38	2.8	0.2	▲
	CCGX060204-NL	6.4	6.35	2.38	2.8	0.4	▲
	CCGX09T302-NL	9.7	9.525	3.97	4.4	0.2	▲
	CCGX09T304-NL	9.7	9.525	3.97	4.4	0.4	▲
	CCGX09T308-NL	9.7	9.525	3.97	4.4	0.8	▲
	CCGX120404-NL	12.9	12.7	4.76	5.5	0.4	▲
	CCGX120408-NL	12.9	12.7	4.76	5.5	0.8	▲
	DCGX070202-NL	7.8	6.35	2.38	2.8	0.2	▲
	DCGX070204-NL	7.8	6.35	2.38	2.8	0.4	▲
	DCGX11T302-NL	11.6	9.525	3.97	4.4	0.2	▲
	DCGX11T304-NL	11.6	9.525	3.97	4.4	0.4	▲
	DCGX11T308-NL	11.6	9.525	3.97	4.4	0.8	▲
	RCGT1204MO-NL	12	12	4.76	4.4	/	▲

Finishing

▲ Featured grade ● Optional grade


# Insert for Aluminum Cutting

SC□□ TC□□ VC□□

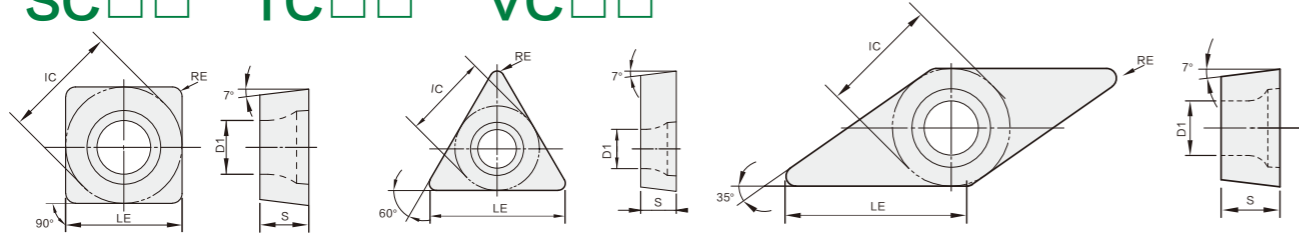

Insert Shape	Type	Dimension					N
		LE	IC	S	D1	RE	
	SCGX09T304-NL	9.525	9.525	3.97	4.4	0.4	▲
	SCGX09T308-NL	9.525	9.525	3.97	4.4	0.8	▲
	SCGX120408-NL	12.7	12.7	4.76	5.5	0.8	▲
	TCGX090204-NL	9.6	5.56	2.38	2.5	0.4	▲
	TCGX110202-NL	11	6.35	2.38	2.8	0.2	▲
	TCGX110204-NL	11	6.35	2.38	2.8	0.4	▲
	TCGX16T304-NL	16.5	9.525	3.97	4.4	0.4	▲
	TCGX16T308-NL	16.5	9.525	3.97	4.4	0.8	▲
	VCGX110302-NL	11	6.35	3.18	2.8	0.2	▲
	VCGX110304-NL	11	6.35	3.18	2.8	0.4	▲
	VCGX160402-NL	16.5	9.525	4.76	4.4	0.2	▲
	VCGX160404-NL	16.5	9.525	4.76	4.4	0.4	▲
	VCGX160408-NL	16.5	9.525	4.76	4.4	0.8	▲
	VCGX160412-NL	16.5	9.525	4.76	4.4	1.2	▲
	VCGX220530-NL	22	12.7	5.56	5.5	3	▲

# Cermet Inserts

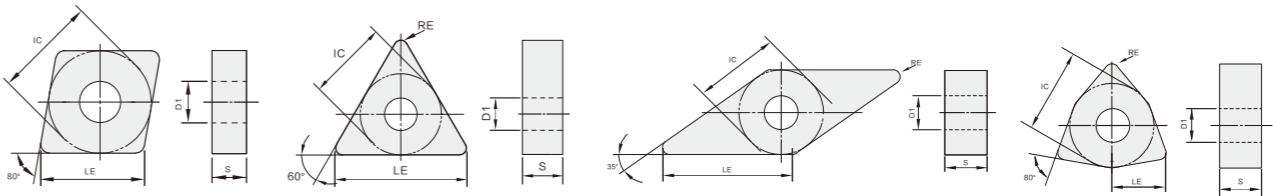

Insert Shape	Type	Dimension					Grade	
		LE	IC	S	D1	RE	OK6220	OK6210
	CNMG120408-SAL	12.9	12.9	4.76	5.16	0.8	▲	▲
	TNMG160404-SAL	16.5	9.525	4.76	3.81	0.4	▲	▲
	TNMG160408-SAL	16.5	9.525	4.76	3.81	0.8	▲	▲
	VNMG160408-SAL	16.6	9.525	4.76	3.81	0.8	▲	▲
	WNMG080404-SAL	8.7	12.7	4.76	5.16	0.4	▲	▲
	WNMG080408-SAL	8.7	12.7	4.76	5.16	0.8	▲	▲

▲ Featured grade ● Optional grade

# Parting and Grooving Insert Naming Rule

### Application Code

QC H V 03 02 R 05 —MP

Symbol	Application Code
QC	Grooving
QD	Part off
QR	Profile
QT	Parting & Grooving

### Tools Holder Type

QC H V 03 02 R 05 —MP

Symbol	Width (mm)	Handle.
E	2	E
F	2.5	F E
G	3	G F E
H	4	H
J	5	J H
K	6	K J H
L	8	L

### Corner Radius

QC H V 03 02 R 05 —MP

Symbol	Corner Radius
02	R0.2
03	R0.3
04	R0.4
05	R0.5
08	R0.8

### Cutting Direction

QC H V 03 02 R 05 —MP

Symbol	Width (mm)
R	Right
L	Left
N	Neutral

# Parting and Grooving Insert Naming Rule

### Edge Number

QC H V 03 02 R 05 —MP

Symbol	Edge Number
W/D	2
V/S	1

### Cutting Edge Width

QT H D 05 04 N —MG

Symbol	Width (mm)
05	5
06	6

### Insert Angle

QC H V 03 02 R 05 —MP


Symbol	Angle
05	5°
07	7°

### Chip Breaker

QC H V 03 02 R 05 —MG


MG	OC
	

# Parting and Grooving Insert QT□□

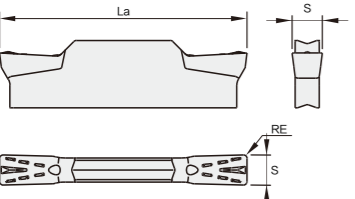

Insert Shape	Type	Dimension			Grade	
		S <sub>0</sub> <sup>+0.1</sup>	RE	La <sub>MAX</sub>	OC4020	OP1215
	QTED02503N-MG	2.5	0.3	20.5	●	●
	QTFD0303N-MG	3	0.3	20.5	●	●
	QTGD0404N-MG	4	0.4	25.5	●	●
	QTHD0504N-MG	5	0.4	25.5	●	●
	QTKD0608N-MG	6	0.8	25.5	●	●

# Parting and Grooving Insert QT□□

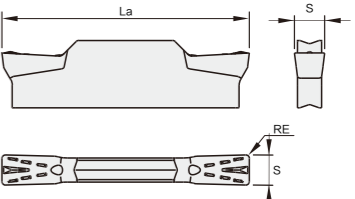

Insert Shape	Type	Dimension			Grade	
		S <sub>0</sub> <sup>+0.1</sup>	RE	La <sub>MAX</sub>	OC4020	OP1215
	QCFW0202N-OC	2	0.2	16	●	●
	QCFW02502N-OC	2.5	0.2	18.5	●	●
	QCGW0304N-OC	3	0.4	21	●	●
	QCHW0404N-OC	4	0.4	21	●	●
	QCJW0508N-OC	5	0.8	26	●	●

▲ Featured grade ● Optional grade

# Threading Turning Insert Naming Rules

## Cutting Direction

R/L/T 16 01 G A 60 M

<b>RT</b>	<b>LT</b>
right hand	left hand

## Insert Size

R/L/T 16 01 G A 60 M

L(mm)	IC(mm)	L(mm)	IC(mm)
6	3.97	16	9.525
8	4.76	22	12.7
11	6.35	27	15.875

## Number of Teeth

R/L/T 16 01 G A 60 M

<b>01</b>	<b>N</b>
Single-teeth	N-teeth

## Insert Type

R/L/T 16 01 G A 60 M

Symbol	Type
<b>G</b>	External threading
<b>L</b>	Internal threading

## Pitch Width

R/L/T 16 01 G A 60 M

	<b>A</b>	<b>AG</b>	<b>G</b>	<b>N</b>	<b>Q</b>		
mm	0.5-1.5	1.0-3.0	1.75-3.0	3.5-5.0	5.5-6.0		
TPI	48-16	26-10	14-8	7-5	4.5-4		

# Threading Turning insert Naming Rules

## Thread Profile

R/L/T 16 01 G A 60 M

Symbol	Thread Profile
<b>55</b>	55° general pitch thread
<b>60</b>	60° general pitch thread
<b>ISO</b>	ISO metric thread
<b>UN</b>	Unified thread (American standard thread)
<b>W</b>	Whitworth thread
<b>BSPT</b>	British standard taper pipe thread
<b>NPT</b>	NPT American standard taper pipe thread
<b>UNJ</b>	UNJ American standard aerospace and aviation thread
<b>RD</b>	30° DIN405 round thread
<b>APIRD</b>	Petroleum pipeline thread
<b>TR</b>	Trapeze30° 103 30° ISO metric thread
<b>ACME</b>	29° American standard ACME thread
<b>STACME</b>	29° American standard STACME thread



## Production Method

R/L/T 16 01 G A 60 M

<b>A</b>	<b>M</b>
Full pressing	Fullground

# Threading Insert

## 60° General Pitch Thread



▶ Application for insert

▶ Standard

it is suitable for all machining



▶ Tolerance grade

External thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT0601G-A60M	0.5-1.25	48-20
R/LT1601G-A60M	0.5-1.5	48-16
R/LT1601G-AG60M	0.5-3.0	48-8
R/LT1601G-G60M	1.75-3.0	14-8
R/LT2201G-N60M	3.5-5.0	7-5
R/LT2701G-Q60M	5.5-6.0	4.5-4

Internal thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT0601L-A60M	0.5-1.25	48-20
R/LT0801L-A60M	0.5-1.5	48-16
R/LT1101L-A60M	0.5-1.5	48-16
R/LT1101L-AG60M	1.0-2.5	48-8
R/LT1601L-A60M	0.5-1.5	48-16
R/LT1601L-AG60M	0.5-3.0	48-8
R/LT1601L-G60M	1.75-3.0	14-8
R/LT2201L-N60M	3.5-5.0	7-5
R/LT2701L-Q60-M	5.5-6.0	4.5-4

# Threading Insert

## 55° General Pitch Thread



▶ Application for insert

▶ Standard

it is suitable for all machining



▶ Tolerance grade

External thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT1101G-A55M	0.5-1.5	48-16
R/LT1601G-A55M	0.5-1.5	48-16
R/LT1601G-AG55M	0.5-3.0	48-8
R/LT1601G-G55M	1.75-3.0	14-8
R/LT2201G-N55M	3.5-5.0	7-5
R/LT2701G-Q55M	5.5-6.0	4.5-4

Internal thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT0601L-A55M	0.5-1.25	48-20
R/LT0801L-A55M	0.5-1.5	48-16
R/LT1101L-A55M	0.5-1.5	48-16
R/LT1101L-AG55M	1.0-2.5	26-9
R/LT1601L-A55M	0.5-1.5	48-16
R/LT1601L-AG55M	0.5-3.0	48-8
R/LT1601L-G55M	1.75-3.0	14-8
R/LT2201L-N55M	3.5-5.0	7-5
R/LT2701L-Q55M	5.5-6.0	4.5-4

# Threading Insert

## ISO Metric Thread



► Application for insert

It is suitable for all machining



► Standard  
MR262(DIN13)

► Tolerance grade  
6g/6H

External thread				Internal thread			
Ground type	A type	Applicative pitch		Ground type	A type	Applicative pitch	
		mm	TPI			mm	TPI
				R/LT0601L-050ISOM		0.5	0.29
				R/LT0601L-075ISOM		0.75	0.43
				R/LT0601L-100ISOM		1.00	0.58
				R/LT0601L-125ISOM		1.25	0.72
				R/LT0801L-050ISOM		0.5	0.29
				R/LT0801L-075ISOM		0.75	0.43
				R/LT0801L-100ISOM		1.00	0.58
				R/LT0801L-125ISOM		1.25	0.72
				R/LT0801L-150ISOM		1.50	0.87
				R/LT0801L-175ISOM		1.75	1.01
R/LT1101G-050ISOM		0.50	0.31	R/LT1101L-050ISOM		0.50	0.29
R/LT1101G-075ISOM		0.75	0.46	R/LT1101L-075ISOM		0.75	0.43
R/LT1101G-080ISOM		0.8	0.49	R/LT1101L-080ISOM		0.8	0.46
R/LT1101G-100ISOM		1.00	0.61	R/LT1101L-100ISOM		1.00	0.58
R/LT1101G-125ISOM		1.25	0.77	R/LT1101L-125ISOM		1.25	0.72
R/LT1101G-150ISOM		1.50	0.92	R/LT1101L-150ISOM		1.50	0.87
R/LT1101G-175ISOM		1.75	1.07	R/LT1101L-175ISOM		1.75	1.01
R/LT1101G-200ISOM		2.00	1.23	R/LT1101L-200ISOM		2.00	1.15
R/LT1601G-050ISOM		0.50	0.31	R/LT1601L-050ISOM		0.50	0.29
R/LT1601G-075ISOM		0.75	0.46	R/LT1601L-075ISOM		0.75	0.43
R/LT1601G-080ISOM		0.80	0.49	R/LT1601L-080ISOM		0.80	0.46
R/LT1601G-100ISOM		1.00	0.61	R/LT1601L-100ISOM		1.00	0.58
R/LT1601G-125ISOM		1.25	0.77	R/LT1601L-125ISOM		1.25	0.72
R/LT1601G-150ISOM	RT1601G-150ISOA	1.50	0.92	R/LT1601L-150ISOM	RT1601L-150ISOA	1.50	0.87
R/LT1601G-175ISOM		1.75	1.07	R/LT1601L-175ISOM		1.75	1.01
R/LT1601G-200ISOM	RT1601G-200ISOA	2.00	1.23	R/LT1601L-200ISOM	RT1601L-200ISOA	2.00	1.15
R/LT1601G-250ISOM	RT1601G-250ISOA	2.50	1.53	R/LT1601L-250ISOM	RT1601L-250ISOA	2.50	1.44
R/LT1601G-300ISOM	RT1601G-300ISOA	3.00	1.84	R/LT1601L-300ISOM	RT1601L-300ISOA	3.00	1.73
R/LT1601G-350ISOM		3.50	2.15	R/LT1601L-350ISOM		3.50	2.02
R/LT2201G-350ISOM		3.50	2.15	R/LT2201L-350ISOM		3.50	2.02
R/LT2201G-400ISOM		4.00	2.45	R/LT2201L-400ISOM		4.00	2.31
R/LT2201G-450ISOM		4.5	2.76	R/LT2201L-450ISOM		4.5	2.60
R/LT2201G-500ISOM		5.00	3.07	R/LT2201L-500ISOM		5.00	2.89
R/LT2701G-550ISOM		5.50	3.37	R/LT2701L-550ISOM		5.50	3.17
R/LT2701G-600ISOM		6.00	3.68	R/LT2701L-600ISOM		6.00	3.46

# Threading Insert

## Unified Thread (American Standard Thread)



► Application for insert

It is suitable for all machining



► Standard  
ANSI B1.1:74

► Tolerance grade  
2A/2B

External thread			Internal thread		
Ground type	Applicative pitch		Ground type	Applicative pitch	
	mm	TPI		mm	TPI
			R/LT0601L-28UNM	28	0.52
			R/LT0601L-24UNM	24	0.61
			R/LT0601L-20UNM	20	0.73
			R/LT0601L-18UNM	18	0.81
			R/LT0801L-28UNM	28	0.52
			R/LT0801L-24UNM	24	0.61
			R/LT0801L-20UNM	20	0.73
			R/LT0801L-18UNM	18	0.81
			R/LT0801L-16UNM	16	0.92
R/LT1101G-28UNM	28	0.56	R/LT1101L-28UNM	28	0.52
R/LT1101G-24UNM	24	0.65	R/LT1101L-24UNM	24	0.61
R/LT1101G-20UNM	20	0.78	R/LT1101L-20UNM	20	0.73
R/LT1101G-18UNM	18	0.87	R/LT1101L-18UNM	18	0.81
R/LT1101G-16UNM	16	0.97	R/LT1101L-16UNM	16	0.92
R/LT1101G-14UNM	14	1.11	R/LT1101L-14UNM	14	1.05
R/LT1101G-12UNM	12	1.30	R/LT1101L-12UNM	12	1.22
R/LT1601G-48UNM	48	0.30	R/LT1601L-48UNM	48	0.31
R/LT1601G-40UNM	40	0.39	R/LT1601L-40UNM	40	0.37
R/LT1601G-32UNM	32	0.49	R/LT1601L-32UNM	32	0.46
R/LT1601G-28UNM	28	0.56	R/LT1601L-28UNM	28	0.52
R/LT1601G-24UNM	24	0.65	R/LT1601L-24UNM	24	0.61
R/LT1601G-20UNM	20	0.78	R/LT1601L-20UNM	20	0.73
R/LT1601G-18UNM	18	0.87	R/LT1601L-18UNM	18	0.81
R/LT1601G-16UNM	16	0.97	R/LT1601L-16UNM	16	0.92
R/LT1601G-14UNM	14	1.11	R/LT1601L-14UNM	14	1.05
R/LT1601G-12UNM	12	1.30	R/LT1601L-12UNM	12	1.22
R/LT1601G-11UNM	11	1.42	R/LT1601L-11UNM	11	1.28
R/LT1601G-10UNM	10	1.56	R/LT1601L-10UNM	10	1.47
R/LT1601G-9UNM	9	1.73	R/LT1601L-9UNM	9	1.63
R/LT1601G-8UNM	8	1.95	R/LT1601L-8UNM	8	1.83
R/LT2201G-7UNM	7	2.22	R/LT2201L-7UNM	7	2.09
R/LT2201G-6UNM	6	2.60	R/LT2201L-6UNM	6	2.44
R/LT2201G-5UNM	5	3.12	R/LT2201L-5UNM	5	2.93
R/LT2701G-4.5UNM	4.5	3.46	R/LT2701L-4.5UNM	4.5	3.26
R/LT2701G-4UNM	4	3.89	R/LT2701L-4UNM	4	3.67

# Threading Insert

## Whitworth Thread





Application for insert  
It is suitable for all machining

- Standard  
B.S.84:1956,  
DIN259,ISO228/1:1982
- Tolerance grade  
Medium class A

External thread				Internal thread			
Ground type	A type	Applicative pitch		Ground type	A type	Applicative pitch	
		mm	TPI			mm	TPI
				R/LT0601L-28WM		28	0.58
				R/LT0601L-24WM		24	0.68
				R/LT0601L-20WM		20	0.51
				R/LT0601L-19WM		19	0.90
				R/LT0801L-28WM		28	0.58
				R/LT0801L-24WM		24	0.68
				R/LT0801L-20WM		20	0.81
				R/LT0801L-19WM		19	0.90
				R/LT0801L-16WM		16	1.02
R/LT1101G-28WM		28	0.58	R/LT1101L-28WM		28	0.58
R/LT1101G-24WM		24	0.68	R/LT1101L-24WM		24	0.68
R/LT1101G-20WM		20	0.81	R/LT1101L-20WM		20	0.81
R/LT1101G-19WM		19	0.90	R/LT1101L-19WM		19	0.90
R/LT1101G-16WM		16	1.02	R/LT1101L-16WM		16	1.02
R/LT1101G-14WM		14	1.16	R/LT1101L-14WM		14	1.16
R/LT1101G-11WM		11	1.48	R/LT1101L-11WM		11	1.48
R/LT1601G-48WM		48	0.34	R/LT1601L-48WM		48	0.34
R/LT1601G-40WM		40	0.41	R/LT1601L-40WM		40	0.41
R/LT1601G-32WM		32	0.51	R/LT1601L-32WM		32	0.51
R/LT1601G-28WM		28	0.58	R/LT1601L-28WM		28	0.58
R/LT1601G-26WM		26	0.63	R/LT1601L-26WM		26	0.63
R/LT1601G-24WM		24	0.68	R/LT1601L-24WM		24	0.68
R/LT1601G-20WM		20	0.81	R/LT1601L-20WM		20	0.81
R/LT1601G-19WM		19	0.90	R/LT1601L-19WM		19	0.90
R/LT1601G-16WM		16	1.02	R/LT1601L-16WM		16	1.02
R/LT1601G-14WM	RT1601G-14WA	14	1.16	R/LT1601L-14WM	RT1601L-14WA	14	1.16
R/LT1601G-12WM		12	1.36	R/LT1601L-12WM		12	1.36
R/LT1601G-11WM	RT1601G-11WA	11	1.48	R/LT1601L-11WM	RT1601L-11WA	11	1.48
R/LT1601G-10WM		10	1.63	R/LT1601L-10WM		10	1.63
R/LT1601G-9WM		9	1.81	R/LT1601L-9WM		9	1.81
R/LT1601G-8WM		8	2.03	R/LT1601L-8WM		8	2.03
R/LT2201G-7WM		7	2.41	R/LT2201L-7WM		7	2.41
R/LT2201G-6WM		6	2.71	R/LT2201L-6WM		6	2.71
R/LT2201G-5WM		5	3.25	R/LT2201L-5WM		5	3.25
R/LT2701G-4.5WM		4.5	3.61	R/LT2701L-4.5WM		4.5	3.61
R/LT2701G-4WM		4	4.07	R/LT2701L-4WM		4	4.07

# Threading Insert

## British Standard Taper Pipe Thread





Application for insert  
It is suitable for all machining

- Standard  
B.S.21:1985
- Tolerance grade

External thread				Internal thread			
Ground type	Full pressed	Applicative pitch		Ground type	Full pressed	Applicative pitch	
		mm	TPI			mm	TPI
				R/LT0601L-28BSPTM		28	0.58
				R/LT0801L-28BSPTM		28	0.58
				R/LT0801L-19BSPTM		19	0.86
				R/LT1101L-19BSPTM		19	0.86
				R/LT1101L-14BSPTM		14	1.16
				R/LT1101L-11BSPTM		11	1.48
R/LT1601G-28BSPTM		28	0.58	R/LT1601L-28BSPTM		28	0.58
R/LT1601G-19BSPTM		19	0.86	R/LT1601L-19BSPTM		19	0.86
R/LT1601G-14BSPTM	RT1601G-14BSPTA	14	1.16	R/LT1601L-14BSPTM	RT1601L-14BSPTA	14	1.16
R/LT1601G-11BSPTM	RT1601G-11BSPTA	11	1.48	R/LT1601L-11BSPTM	RT1601L-11BSPTA	11	1.48

# Threading Insert

## NPT American Standard Taper Pipe Thread





- ▶ Application for insert
  - ▶ Standard USAS B2. 1:1968
  - ▶ Tolerance grade
- It is suitable for all machining

External thread			Internal thread		
Ground type	Applicative pitch		Ground type	Applicative pitch	
	mm	TPI		mm	TPI
			R/LT0601L-27NPTM	27	0.66
			R/LT0801L-27NPTM	27	0.66
			R/LT0801L-18NPTM	18	1.01
			R/LT1101L-18NPTM	18	1.01
			R/LT1101L-14NPTM	14	1.33
R/LT1601G-27NPTM	27	0.66			
R/LT1601G-18NPTM	18	1.01	R/LT1601L-18NPTM	18	1.01
R/LT1601G-14NPTM	14	1.33	R/LT1601L-14NPTM	14	1.33
R/LT1601G-11.5NPTM	11.5	1.64	R/LT1601L-11.5NPTM	11.5	1.64
R/LT1601G-8NPTM	8	2.42	R/LT1601L-8NPTM	8	2.42

# Threading Insert

## UNJ American Standard Aerospace and Aviation Thread





- ▶ Application for insert
  - ▶ Standard MIL-D-8879C
  - ▶ Tolerance grade 3A/3B
- It is suitable for all machining

External thread			Internal thread		
Ground type	Applicative pitch		Ground type	Applicative pitch	
	mm	TPI		mm	TPI
			R/LT0601L-18UNJM	18	0.74
			R/LT0801L-16UNJM	16	0.83
			R/LT0801L-14UNJM	14	0.95
			R/LT1101L-12UNJM	12	1.11
R/LT1601G-40UNJM	40	0.37			
R/LT1601G-36UNJM	36	0.41			
R/LT1601G-32UNJM	32	0.46			
R/LT1601G-28UNJM	28	0.52			
R/LT1601G-24UNJM	24	0.61			
R/LT1601G-20UNJM	20	0.73			
R/LT1601G-18UNJM	18	0.81			
R/LT1601G-16UNJM	16	0.92			
R/LT1601G-14UNJM	14	1.05			
R/LT1601G-12UNJM	12	1.22			
R/LT1601G-10UNJM	10	1.47	R/LT1601L-10UNJM	10	1.33
R/LT1601G-8UNJM	8	1.83	R/LT1601L-8UNJM	8	1.66
R/LT2201G-7UNJM	7	2.09	R/LT2201L-7UNJM	7	1.90
R/LT2201G-6UNJM	6	2.44	R/LT2201L-6UNJM	6	2.21
R/LT2201G-5UNJM	5	2.93	R/LT2201L-5UNJM	5	2.66
R/LT2701G-4.5UNJM	4.5	3.26	R/LT2701L-4.5UNJM	4.5	2.95
R/LT2701G-4UNJM	4	3.67	R/LT2701L-4UNJM	4	3.32

## Threading Insert

### 30° DIN405 Round Thread



► Application for insert

It is suitable for all machining



► Standard  
DIN405

► Tolerance grade  
7h/7H

External thread			Internal thread		
Ground type	Applicative pitch		Ground type	Applicative pitch	
	mm	TPI		mm	TPI
R/LT1601G-10RDM	10	1.27	R/LT1601L-10RDM	10	1.27
R/LT1601G-8RDM	8	1.59	R/LT1601L-8RDM	8	1.59
R/LT1601G-6RDM	6	2.12	R/LT1601L-6RDM	6	2.12
R/LT2201G-6RDM	6	2.12	R/LT2201L-6RDM	6	2.12
R/LT2201G-4RDM	4	3.18	R/LT2201L-4RDM	4	3.18

## Threading Insert

### 30° ISO Metric Thread



► Application for insert



It is suitable for all machining

► Standard  
DIN103

► Tolerance grade  
7e/7H

External thread			Internal thread		
Ground type	Applicative pitch		Ground type	Applicative pitch	
	mm	TPI		mm	TPI
R/LT1601G-1.5TRM	1.5	0.90	R/LT1601L-1.5TRM	1.5	0.90
R/LT1601G-2TRM	2	1.25	R/LT1601L-2TRM	2	1.25
R/LT1601G-3TRM	3	1.75	R/LT1601L-3TRM	3	1.75
R/LT2201G-4TRM	4	2.25	R/LT2201L-4TRM	4	2.25
R/LT2201G-5TRM	5	2.75	R/LT2201L-5TRM	5	2.75
R/LT2701G-6TRM	6	3.50	R/LT2701L-6TRM	6	3.50
R/LT2701G-7TRM	7	4.00	R/LT2701L-7TRM	7	4.00

### Petroleum Pipeline Threading insert



► Application for insert

It is suitable for all machining



► Standard  
STD.5B.1979

► Tolerance grade

external thread			internal thread		
ground type	applicative pitch		ground type	applicative pitch	
	mm	TPI		mm	TPI
R/LT1601G-10APIRDM	10	1.41	R/LT1601L-10APIRDM	10	1.41
R/LT1601G-8APIRDM	8	1.81	R/LT1601L-8APIRDM	8	1.81

# Threading Insert

## 29° American ACME Thread



► Application for insert

It is suitable for all machining

► Standard  
ANSI B1.5:1988



► Tolerance grade  
3G

External thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT1601G-12ACMEM	12	1.19
R/LT1601G-10ACMEM	10	1.52
R/LT1601G-8ACMEM	8	1.84
R/LT2201G-6ACMEM	6	2.37
R/LT2201G-5ACMEM	5	2.79
R/LT2701G-4ACMEM	4	3.43

Internal thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT1601L-8ACMEM	8	1.84
R/LT2201L-6ACMEM	6	2.37
R/LT2201L-5ACMEM	5	2.79
R/LT2701L-4ACMEM	4	3.43

# Threading Insert

## 29° American STACME Thread



► Application for insert

It is suitable for all machining

► Standard  
ANSI B1.8:1988







► Tolerance grade  
2G







External thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT1601G-12STACMEM	12	0.76
R/LT1601G-10STACMEM	10	1.02
R/LT1601G-8STACMEM	8	1.21
R/LT2201G-6STACMEM	6	1.52
R/LT2201G-5STACMEM	5	1.78
R/LT2701G-4STACMEM	4	2.16
R/LT2701G-3STACMEM	3	2.79





Internal thread		
Ground type	Applicative pitch	
	mm	TPI
R/LT2201L-5STACMEM	5	1.78
R/LT2701L-4STACMEM	4	2.16
R/LT2701L-3STACMEM	3	2.79

# External Turning Tools List

## Wedge Clamping






DCLNR/L	DCBNR/L	DCKNR/L	DCMNN	DDJNR/L	DDPNN
 P69	 P69	 P70	 P70	 P71	 P71

DDQNR/L	DSBNR/L	DSDNN	DSSNR/L	DSKNR/L	DTGNR/L
 P72	 P72	 P73	 P73	 P74	 P74







DTFNR/L	DVVNN	DVJNR/L	DWLR/L
 P75	 P75	 P76	 P76

# External Turning Tools List

## Top and Hole Clamping

MCLNR/L	MCBNR/L	MCKNR/L	MDJNR/L	MDQNR/L	MSBNR/L
 P77	 P77	 P78	 P78	 P79	 P80







MSRNR/L	MSKNR/L	MSDNN	MSSNR/L	MTGNR/L	MTJNR/L
 P80	 P81	 P81	 P82	 P82	 P83







MTJNR/L(B)	MTFNR/L	MTQNR/L	MTENN	MVJNR/L	MVVNN
 P83	 P84	 P84	 P85	 P85	 P86



MVUNR/L	MVQNR/L	MWLR/L	MRGNR/L	MRDNN
 P86	 P87	 P87	 P88	 P88

# External Turning Tools List

## Hole Clamping

PCBNR/L	PCLNR/L	PDJNR/L	PDNNR/L	PSBNR/L	PSDNN
 P89	 P89	 P90	 P90	 P91	 P91







PSKNR/L	PSSNR/L	PRDCN	PRGCR/L	PTGNR/L	PTFNR/L
 P92	 P92	 P93	 P93	 P94	 P95







PTTNR/L	PWLNLR/L
 P95	 P96

# External Turning Tools List

## Screw On

SCACR/L	SCLCR/L	SDACR/L	SDJCR/L	SDNCN	SVJCR/L
 P97	 P97	 P98	 P98	 P99	 P99

SVJBR/L	SVABR/L	SVACR/L	SVVBN	SVVCN	SSBCR/L
 P100	 P100	 P101	 P101	 P102	 P102

SSDCN	SSKCR/L	SSSCR/L	STACR/L	STFCR/L	STGCR/L
 P103	 P103	 P104	 P104	 P105	 P105

STTCR/L	SWACR/L	SRDCN	SRGCR/L	SRACR/L
 P106	 P106	 P107	 P107	 P108

# Internal Turning Tools List

## Top and Hole Clamping

MCKNR/L	MCLNR/L	MDQNR/L	MDUNR/L	MDZNR/L	MSKNR/L
 P111	 P111	 P112	 P112	 P113	 P113

MVQNR/L	MVUNR/L	MVWNR/L	MVXNR/L	MWLNRL/L	MTFNR/L
 P114	 P114	 P115	 P115	 P116	 P116

MTQNR/L	MTJNR/L	MTUNR/L	MTWNR/L
 P117	 P117	 P118	 P118

## Hole Clamping

PCLNR/L	PDSNR/L	PDUNR/L	PSKNR/L	PTFNR/L	PWLNRL/L
 P119	 P119	 P120	 P120	 P121	 P121

# Internal Turning Tools List

## Screw On

SCLCR/L	SCLCR/L-H	SCKCR/L	SDQCR/L	SDXCR/L	SDWCR/L
 P122	 P122	 P123	 P123	 P124	 P124

SDUCR/L	SDZCR/L	SSKCR/L	SSSCR/L	STFCR/L	STWCR/L
 P125	 P125	 P126	 P126	 P127	 P127

STFPR/L	STUCR/L	SVQCR/L	SVQBR/L	SVUCR/L	SVWCR/L
 P128	 P128	 P129	 P129	 P130	 P130

SVXCR/L	SVZCR/L
 P131	 P132

# External Turning Tools List

## External Parting and Grooving Tools


QEED1616R/L10



## Turning and Face Grooving Tools


QFFD2525R/L10-48H

QFFD2525R/L10-48L



## ZQ Part Off Cutting Tools

ZQ1616R03



B

C

D

E

# External Turning Tools List


## External Parting Blade

SPB326-S



## External Threading Turning Tools

SWR/L1010H11



## Internal Threading Turning Tools

SNR/L1010K11



B

C

D

E

# External Turning Tools Naming Rule

## Clamping System

M C L N R 25 25 M 12

<b>P</b>  hole clamping	<b>S</b>  Screw on
<b>M</b>  Top and hole clamping	<b>C</b>  Top clamping
<b>D</b>  Top clamping	

## Insert Shape

M C L N R 25 25 M 12

<b>C</b>  80°	<b>D</b>  55°	<b>R</b> 
<b>S</b>  90°	<b>T</b>  60°	<b>V</b>  35°
<b>W</b>  80°		

## Cutting Direction

M C L N R  
25 25 M 12

<b>R</b> 
<b>L</b> 
<b>N</b> 

## Holder Style and Leading Angle

M C L N R 25 25 M 12

<b>A</b> 	<b>B</b> 	<b>C</b> 	<b>D</b> 	<b>E</b> 	<b>F</b> 
<b>H</b> 	<b>G</b> 	<b>J</b> 	<b>K</b> 	<b>L</b> 	<b>M</b> 
<b>N</b> 	<b>O</b> 	<b>P</b> 	<b>Q</b> 	<b>R</b> 	<b>S</b> 
<b>T</b> 	<b>U</b> 	<b>V</b> 	<b>W</b> 	<b>X</b> 	

## Insert Clearance Angle

M C L N R  
25 25 M 12

<b>N</b>	0°
<b>B</b>	5°
<b>C</b>	7°
<b>P</b>	11°
<b>D</b>	15°
<b>E</b>	20°

# External Turning Tools Naming Rule

## Tools-tip Height

M C L N R 25 25 M 12

		12	16	20	25	32	40	50
HF	HF	12	16	20	25	32	40	50

Integers to be preceded by 0 eg:h=8 indicated by 08

## Shank Width

M C L N R 25 25 M 12

		12	16	20	25	32	40	50
B	B	12	16	20	25	32	40	50

Integers to be preceded by 0 eg:h=8 indicated by 08

## Tool Length

M C L N R 25 25 M 12


Code	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>K</b>	<b>M</b>	<b>P</b>
Length	60	70	80	90	100	125	150	170
Code	<b>Q</b>	<b>R</b>	<b>S</b>	<b>T</b>	<b>U</b>	<b>V</b>	<b>W</b>	
Length	180	200	250	300	350	400	450	

## Cutting Edge Length


M C L N R 25 25 M 12

	<b>C</b>	<b>D</b>	<b>R</b>	<b>S</b>	<b>T</b>	<b>V</b>	<b>W</b>
Cutting Tool Shape							
Inscribed Circle	Cutting Edge Length						
5.556					09		
6.350	06	07			11		
9.525	09	11	09	09	16	16	06
12.700	12	15	12	12	22	22	08
15.875	16	19	15	15	27		
19.050	19		19	19	33		
25.400	25		25	25	44		

# D Type External Turning Tool Holder

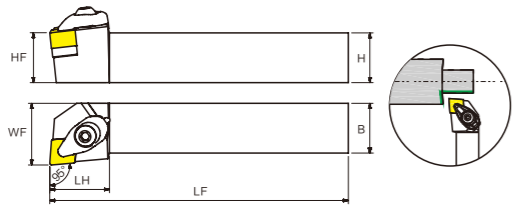


DCLNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DCLNR/L 2020K12	20	20	125	20	27	32						
	DCLNR/L 2525M12	25	25	150	25	32	30						
	DCLNR/L 3232P12	32	32	170	32	39	30						

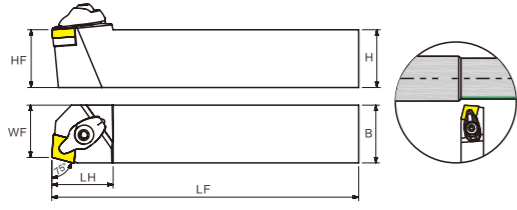


DCBNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DCBNR/L 2020K12	20	20	125	20	17	34						
	DCBNR/L 2525M12	25	25	150	25	22	36						
	DCBNR/L 3232P12	32	32	170	32	29	34						

# D Type External Turning Tool Holder

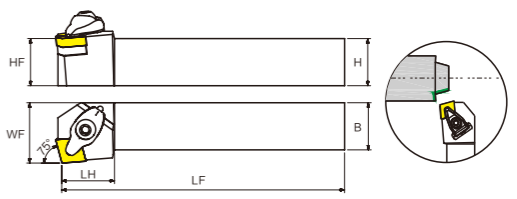


DCKNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DCKNR/L 2020K12	20	20	125	20	26	28						
	DCKNR/L 2525M12	25	25	150	25	32	28						
	DCKNR/L 3232P12	32	32	170	32	39	28						

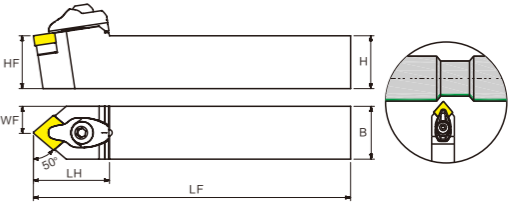


DCMNN	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DCMNN 2020K12	20	20	125	20	10	36						
	DCMNN 2525M12	25	25	150	25	12.5	36						
	DCMNN 3232P12	32	32	170	32	16	36						

## D Type External Turning Tool Holder

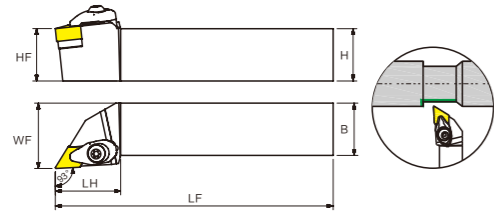


DDJNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw	
		H	B	LF	HF	WF	LH							
	93°	DDJNR/L2020K11	20	20	125	20	25	32						
	DDJNR/L2525M11	25	25	150	25	30	32							
	DDJNR/L2020K1504	20	20	125	20	25	40							
	DDJNR/L2525M1504	25	25	150	25	31	40							
	DDJNR/L3232P1504	32	32	170	32	39	40							
	DDJNR/L2020K1506	20	20	125	20	25	40							
	DDJNR/L2525M1506	25	25	150	25	31	40							
	DDJNR/L3232P1506	32	32	170	32	39	40							

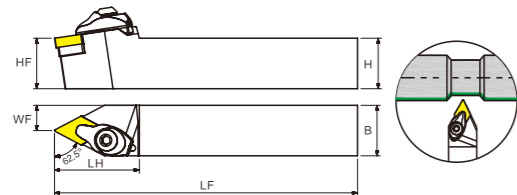


DDPNN	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw	
		H	B	LF	HF	WF	LH							
	62.5°	DDPNN2020K11	20	20	125	20	10	32						
	DDPNN2525M11	25	25	150	25	12.5	36							
	DDPNN2020K1504	20	20	125	20	10	36							
	DDPNN2525M1504	25	25	150	25	12.5	36							
	DDPNN3232P1504	32	32	170	32	16	36							
	DDPNN2020K1506	20	20	125	20	10	36							
	DDPNN2525M1506	25	25	150	25	12.5	36							
	DDPNN3232P1506	32	32	170	32	16	36							

## D Type External Turning Tool Holder

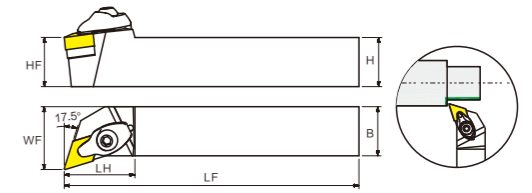


DDQNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw	
		H	B	LF	HF	WF	LH							
	107.5°	DDQNR/L2020K11	20	20	125	20	25	28						
	DDQNR/L2525M11	25	25	150	25	31	28							
	DDQNR/L2020K1504	20	20	125	20	26	36							
	DDQNR/L2525M1504	25	25	150	25	32	36							
	DDQNR/L3232P1504	32	32	170	32	38	36							
	DDQNR/L2020K1506	20	20	125	20	26	36							
	DDQNR/L2525M1506	25	25	150	25	32	36							
	DDQNR/L3232P1506	32	32	170	32	38	36							

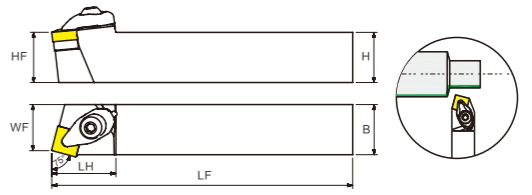


DSBNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw	
		H	B	LF	HF	WF	LH							
	75°	DSBNR/L 2020K12	20	20	125	20	18	34						
	DSBNR/L 2525M12	25	25	150	25	23	32							
	DSBNR/L 3232P12	32	32	170	32	30	33							
	DSBNR/L 2525M12	25	25	150	25	23	32							

# D Type External Turning Tool Holder

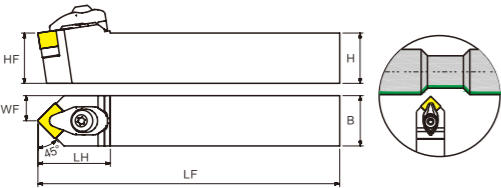


DSDNN	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DSDNN 2020K12	20	20	125	20	10	36						
	DSDNN 2525M12	25	25	150	25	12.5	36						
	DSDNN 3232P12	32	32	170	32	12.5	36						

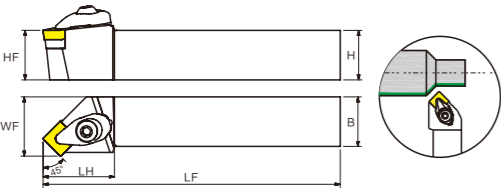


DSSNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DSSNR/L 2020K12	20	20	125	20	25	36						
	DSSNR/L 2525M12	25	25	150	25	30	36						
	DSSNR/L 3232P12	32	32	170	32	38	36						

# D Type External Turning Tool Holder

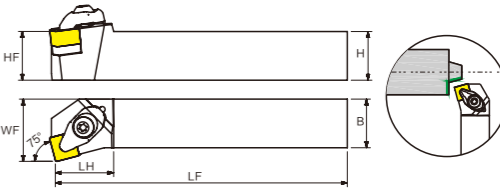





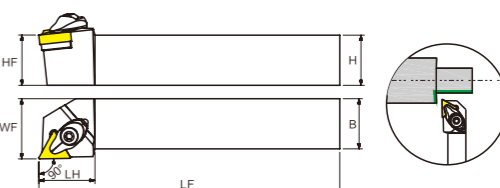



DSKNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DSKNR/L 2020K12	20	20	125	20	26	28						
	DSKNR/L 2525M12	25	25	150	25	36	28						
	DSKNR/L 3232P12	32	32	170	32	38	32						

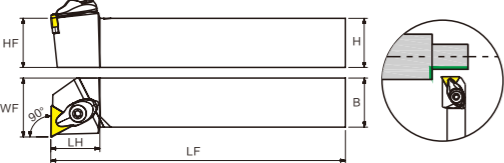









DTGNR	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DTGNR 2020K16	20	20	125	20	24	28						
	DTGNR 2525M16	25	25	150	25	30	28						
	DTGNR 3225P16	32	25	170	32	30	28						
	DTGNR 3232P16	32	32	170	32	38	32						

# D Type External Turning Tool Holder

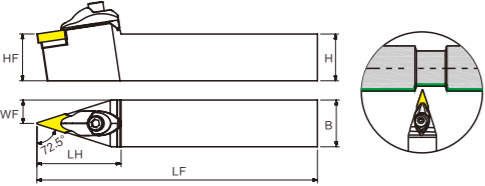









DTFNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DTFNR/L 2020K16	20	20	125	20	25	28						
	DTFNR/L 2525M16	25	25	150	25	30	26						
	DTFNR/L 3225P16	32	25	170	32	30	26						
	DTFNR/L 3232P16	32	32	170	32	38	26						

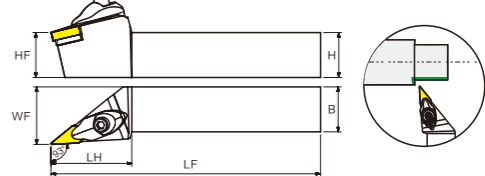









DVVNN	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DVVNN2020K16	20	20	125	20	10	45						
	DVVNN2525M16	25	25	150	25	12.5	45						
	DVVNN3225P16	32	25	170	32	12.5	45						
	DVVNN3232P16	32	32	170	32	16	45						
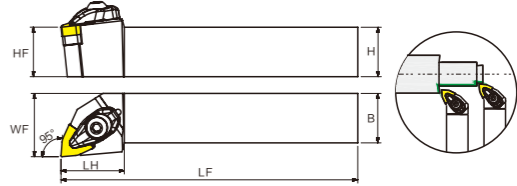
# D Type External Turning Tool Holder




DVJNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DVJNR/L 2020K16	20	20	125	20	26	45						
	DVJNR/L 2525M16	25	25	150	25	32	45						
	DVJNR/L 3225P16	32	25	170	32	32	45						
	DVJNR/L 3232P16	32	32	170	32	40	45						




DWLNR/L	Type	Dimension						Adaptable Inserts	Shim	Wrench	Clamp	Clamping Screw	Screw
		H	B	LF	HF	WF	LH						
	DWLNR/L 2020K08	20	20	125	20	25	32						
	DWLNR/L 2525M08	25	25	150	25	32	31						
	DWLNR/L 3225P08	32	25	170	32	32	31						
	DWLNR/L 3232P08	32	32	170	32	39	31						
	DWLNR/L 2020K06	20	20	125	20	25	25						
	DWLNR/L 2525M06	25	25	150	25	30	25						

# M Type External Turning Tool Holder

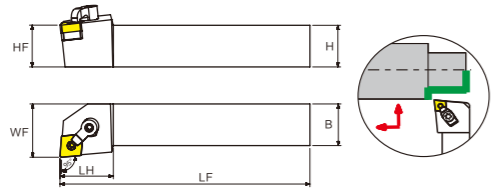


MCLNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw						
		H	B	LF	HF	WF	LH												
	95°	MCLNR/L1616H12	16	16	100	16	21	30											
	MCLNR/L2020K12	20	20	125	20	25	28												
	MCLNR/L2525M12	25	25	150	25	32	32												
	MCLNR/L3225P12	32	25	170	32	32	32												
	MCLNR/L3232P12	32	32	170	32	39	32												
	MCLNR/L2525M16	25	25	150	25	32	38												
	MCLNR/L3225P16	32	25	170	32	33	38												
	MCLNR/L3232P16	32	32	170	32	40	38												
	MCLNR/L3232P19	32	32	170	32	40	43												
	MCLNR/L4040R19	40	40	200	40	50	43												

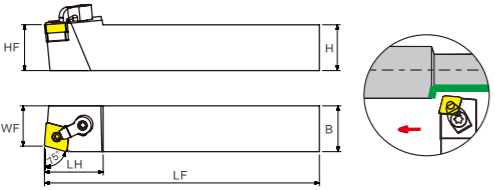


MCBNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw						
		H	B	LF	HF	WF	LH												
	75°	MCBNR/L2020K12	20	20	125	20	17	32											
	MCBNR/L2525M12	25	25	150	25	22	32												
	MCBNR/L3225P12	32	25	170	32	22	32												
	MCBNR/L2525M16	25	25	150	25	22	36												
	MCBNR/L3225P16	32	25	170	32	22	35												
	MCBNR/L3232P16	32	32	170	32	27	35												
	MCBNR/L3232P19	32	32	170	32	27	40												
	MCBNR/L4040R19	40	40	200	40	35	40												

# M Type External Turning Tool Holder

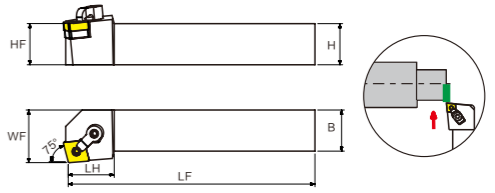


MCKNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw						
		H	B	LF	HF	WF	LH												
	75°	MCKNR/L2020K12	20	20	125	20	25	28											
	MCKNR/L2525M12	25	25	150	25	32	28												
	MCKNR/L3225P12	32	25	170	32	32	28												
	MCKNR/L2525M16	25	25	150	25	32	30												
	MCKNR/L3225P16	32	25	170	32	32	30												
	MCKNR/L3232P16	32	32	170	32	38	30												
	MCKNR/L3232P19	32	32	170	32	40	36												
	MCKNR/L4040R19	40	40	200	40	48	36												

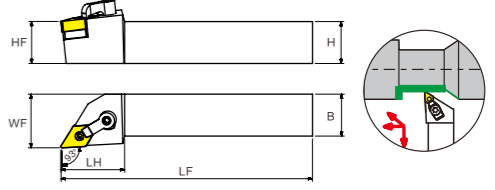


MDJNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw						
		H	B	LF	HF	WF	LH												
	93°	MDJNR/L1616H11	16	16	100	16	20	30											
	MDJNR/L2020K11	20	20	125	20	25	32												
	MDJNR/L2525M11	25	25	150	25	32	32												
	MDJNR/L3225P11	32	25	170	32	32	32												
	MDJNR/L2020K1504/06	20	20	125	20	25	36												
	MDJNR/L2525M1504/06	25	25	150	25	32	38												
	MDJNR/L3225P1504/06	32	25	170	32	32	38												
	MDJNR/L3232P1504/06	32	32	170	32	40	38												
	MDJNR/L4040R15	40	40	200	40	48	40												

# M Type External Turning Tool Holder

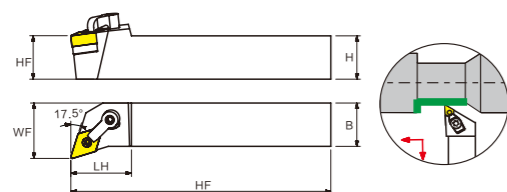


MDQNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MDQNR/L1616H11	16	16	100	16	21	30	DN□□1104□□	WS061025	MD1103	S2 S3	MCL1814	MSP513
	MDQNR/L2020K11	20	20	125	20	25	32		WS061030				
	MDQNR/L2525M11	25	25	150	25	30	30	DN□□1504□□	WS061025	MD1504	S3	MCL2114	04:MSP617
	MDQNR/L3225P11	32	25	170	32	30	30		WS061030				06:MSP619
	MDQNR/L2020K1504/06	20	20	125	20	27	36	DN□□1506□□	WS061030	S4 S5	MCL3220	MSP1229	
	MDQNR/L2525M1504/06	25	25	150	25	32	35		WS101035				
	MDQNR/L3225P1504/06	32	25	170	32	32	35	SN□□2509□□	WS101035	MS2508	S4 S5	MCL3220	MSP1229
	MDQNR/L3232P1504/06	32	32	170	32	40	35						

# M Type External Turning Tool Holder

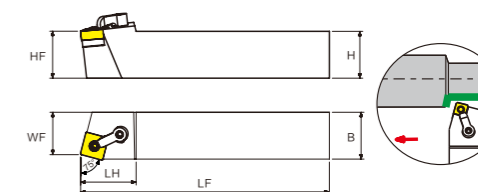


MSBNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MSBNR/L2020K12	20	20	125	20	17	34	SN□□1204□□	WS061025	MS1204	S3	MCL1814	MSP617
	MSBNR/L2525M12	25	25	150	25	22	32		WS061030				
	MSBNR/L3225P12	32	25	170	32	22	32	SN□□1506□□	WS061030	MS1504	S3	MCL2114	MSP821
	MSBNR/L2525M15	25	25	150	25	22	38		WS081030				
	MSBNR/L3232P15	32	32	170	32	29	38	SN□□1906□□	WS081030	MS1904	S4	MCL2217	MSP1021
	MSBNR/L3232P19	32	32	170	32	27	45						
	MSBNR/L4040R19	40	40	200	40	35	45	SN□□2509□□	WS101035	MS2508	S4 S5	MCL3220	MSP1229
	MSBNR/L4040S25	40	40	250	40	34	60						

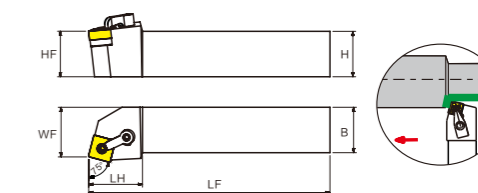


MSRR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MSRR/L2020K12	20	20	125	20	22	32	SN□□1204□□	WS061025	MS1204	S3	MCL1814	MSP617
	MSRR/L2525M12	25	25	150	25	27	32		WS061030				
	MSRR/L3225P12	32	25	170	32	27	32	SN□□1506□□	WS061030	MS1504	S3	MCL2114	MSP821
	MSRR/L2525M15	25	25	150	25	27	38		WS081030				
	MSRR/L3232P15	32	32	170	32	35	38	SN□□1906□□	WS081030	MS1904	S4	MCL2217	MSP1021
	MSRR/L3232P19	32	32	170	32	35	45						
	MSRR/L4040R19	40	40	200	40	43	45	SN□□2509□□	WS101035	MS2508	S4 S5	MCL3220	MSP1229
	MSRR/L4040S25	40	40	250	40	43	55						

# M Type External Turning Tool Holder

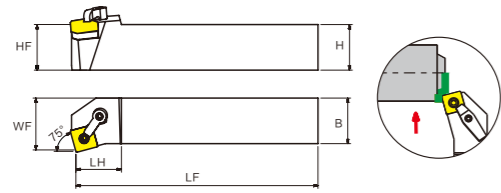


MSKNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MSKNR/L2020K12	20	20	125	20	25	28	SN□□1204□□	WS061025	MS1204	S3	MCL1814	MSP617
	MSKNR/L2525M12	25	25	150	25	32	27		WS061030				
	MSKNR/L3225P12	32	25	170	32	32	27	SN□□1506□□	WS061030	MS1504	S3	MCL2114	MSP821
	MSKNR/L2525M15	25	25	150	25	32	32						
	MSKNR/L3232P15	32	32	170	32	38	32	SN□□1906□□	WS081030	MS1904	S4	MCL2217	MSP1021
	MSKNR/L3232P19	32	32	170	32	38	36						
	MSKNR/L4040R19	40	40	200	40	50	40	SN□□2509□□	WS101035	MS2508	S4 S5	MCL3220	MSP1229
	MSKNR/L4040S25	40	40	250	40	50	45						

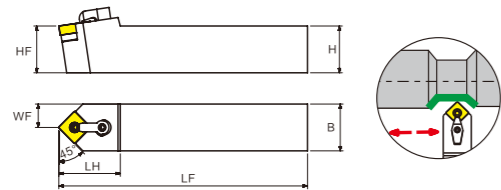


MSDNN	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MSDNN2020K12	20	20	125	20	10	34	SN□□1204□□	WS061025	MS1204	S3	MCL1814	MSP617
	MSDNN2525M12	25	25	150	25	12.5	34		WS061030				
	MSDNN3225P12	32	25	170	32	12.5	34	SN□□1506□□	WS061030	MS1504	S3	MCL2114	MSP821
	MSDNN2525M15	25	25	150	25	12.5	42						
	MSDNN3225P15	32	32	170	32	16	42	SN□□1906□□	WS081030	MS1904	S4	MCL2217	MSP1021
	MSDNN3232P19	32	32	170	32	16	45						
	MSDNN4040R19	40	40	200	40	20	50	SN□□2509□□	WS101035	MS2508	S4 S5	MCL3220	MSP1229
	MSDNN4040S25	40	40	250	40	20	60						

# M Type External Turning Tool Holder

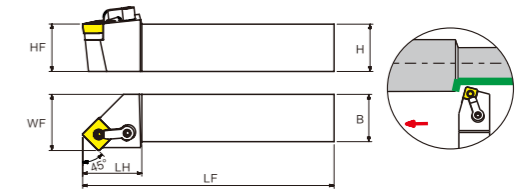



MSSNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MSSNR/L2020K12	20	20	125	20	25	36	SN□□1204□□	WS061025	MS1204	S3	MCL1814	MSP617
	MSSNR/L2525M12	25	25	150	25	30	36		WS061030				
	MSSNR/L3225P12	32	25	170	32	30	33	SN□□1506□□	WS061030	MS1504	S3	MCL2114	MSP821
	MSSNR/L3232P12	32	32	170	32	38	35						
	MSSNR/L2525M15	25	25	150	25	30	40	SN□□1906□□	WS081030	MS1904	S4	MCL2217	MSP1021
	MSSNR/L3232P15	32	32	170	32	38	40						
	MSSNR/L3232P19	32	32	170	32	38	45	SN□□2509□□	WS101035	MS2508	S4 S5	MCL3220	MSP1229
	MSSNR/L4040R19	40	40	200	40	46	45						
	MSSNR/L4040S25	40	40	250	40	50	60						

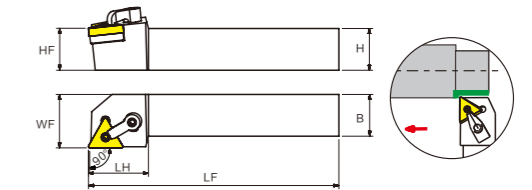



MTGNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MTGNR/L2020K16	20	20	125	20	25	32	TN□□1604□□	WS061025	MT1603	S2 S3	MCL1814	MSP513
	MTGNR/L2525M16	25	25	150	25	32	30		WS061030				
	MTGNR/L3225P16	32	25	170	32	32	30	TN□□2204□□	WS061030	MT2204	S3	MCL2114	MSP617
	MTGNR/L2525M22	25	25	150	25	32	36						
	MTGNR/L3225P22	32	25	170	32	32	36	SN□□2204□□	WS061030	MT2204	S3	MCL2114	MSP617
	MTGNR/L3232P22	32	32	170	32	38	36						

# M Type External Turning Tool Holder

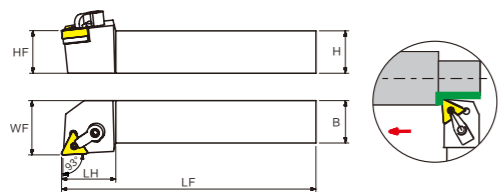



MTJNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	93°												
	MTJNR/L1616H16	16	16	100	16	20	28	TN□□1604□□	WS061025	MT1603	S2 S3	MCL1814	MSP513
	MTJNR/L2020K16	20	20	125	20	25	32		WS061030				
	MTJNR/L2525M16	25	25	150	25	32	32						
	MTJNR/L3225P16	32	25	170	32	32	32						
	MTJNR/L3232P16	32	32	170	32	32	32						
	MTJNR/L2525M22	25	25	150	25	32	36	TN□□2204□□	WS061030	MT2204	S3	MCL2114	MSP617
	MTJNR/L3225P22	32	25	170	32	32	36						
MTJNR/L3232P22	32	32	170	32	38	36							

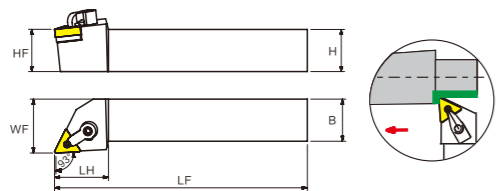



MTJNR/L(B)	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	93°												
	MTJNR/L1616H16(B)	16	16	100	16	20	28	TN□□1604□□	WS061025	MT1603	S2 S3	MCL1814	MSP513
	MTJNR/L2020K16(B)	20	20	125	20	25	32		WS061030				
	MTJNR/L2525M16(B)	25	25	150	25	32	32						
	MTJNR/L3225P16(B)	32	25	170	32	32	32						
	MTJNR/L3232P16(B)	32	32	170	32	32	32						
	MTJNR/L2525M22(B)	25	25	150	25	32	36	TN□□2204□□	WS061030	MT2204	S3	MCL2114	MSP617
	MTJNR/L3225P22(B)	32	25	170	32	32	36						
MTJNR/L3232P22(B)	32	32	170	32	38	36							

# M Type External Turning Tool Holder

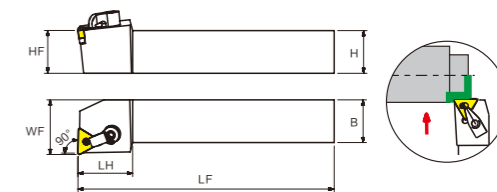


MTFNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw	
		H	B	LF	HF	WF	LH							
	90°													
	MTFNR/L1616H16	16	16	100	16	21	28	TN□□1604□□	WS061025	MT1603	S2 S3	MCL1814	MSP513	
	MTFNR/L2020K16	20	20	125	20	25	30							WS061030
	MTFNR/L2525M16	25	25	150	25	32	32							
	MTFNR/L3225P16	32	25	170	32	32	32							
	MTFNR/L3232P16	32	32	170	32	38	32							
	MTFNR/L2525M22	25	25	150	25	32	36	TN□□2204□□	WS061030	MT2204	S3	MCL2114	MSP617	
	MTFNR/L3225P22	32	25	170	32	32	36							
MTFNR/L3232P22	32	32	170	32	38	36								

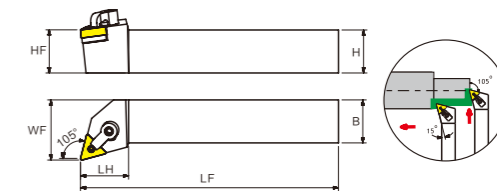


MTQNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	105°												
	MTQNR/L2020K16	20	20	125	20	29	25	TN□□1604□□	WS061025	MT1603	S2 S3	MCL1814	MSP513
	MTQNR/L2525M16	25	25	150	25	35	28		WS061030				
	MTQNR/L3225P16	32	25	170	32	35	25						
	MTQNR/L2525M22	25	25	150	25	38	36	TN□□2204□□	WS061030	MT2204	S3	MCL2114	MSP617
	MTQNR/L3232P22	32	32	170	32	46	36						

# M Type External Turning Tool Holder

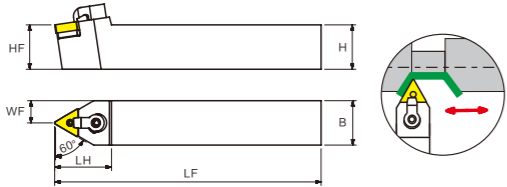


MTENN	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MTENN1616H16	16	16	100	16	8	32	TN□□1604□□	WS061025	MT1603	S2 S3	MCL1814	MSP513
	MTENN2020K16	20	20	125	20	10	34						
	MTENN2525M16	25	25	150	25	12.5	32						
	MTENN3232P16	32	32	170	32	16	32						

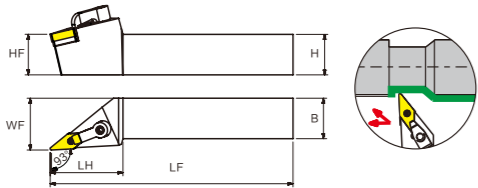


MVJNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MVJNR/L1616H16	16	16	100	16	22	43	VN□□1604□□	WS061025	MV1603	S2 S3	MCL2414	MSP513
	MVJNR/L2020K16	20	20	125	20	26	45						
	MVJNR/L2525M16	25	25	150	25	32	45						
	MVJNR/L3225P16	32	25	170	32	32	45						
	MVJNR/L3232P16	32	32	170	32	40	45						

# M Type External Turning Tool Holder

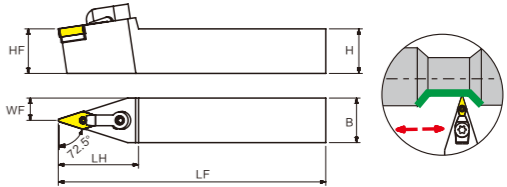






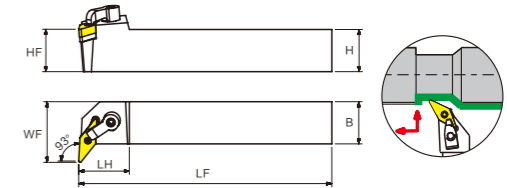



MVVNN	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MVVNN2020K16	20	20	125	20	10	45	VN□□1604□□	WS061025	MV1603	S2 S3	MCL2414	MSP513
	MVVNN2525M16	25	25	150	25	12.5	45		WS061030				
	MVVNN3225P16	32	25	170	32	12.5	45						
	MVVNN3232P16	32	32	170	32	16	45						




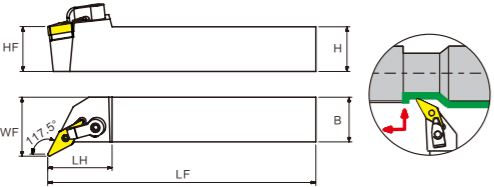











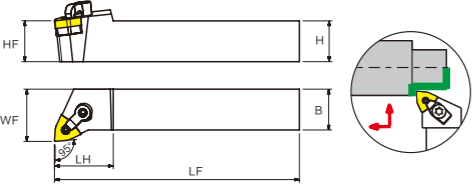


MVUNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MVUNR/L1616H16	16	16	100	16	20	45	VN□□1604□□	WS061025	MV1603	S2 S3	MCL2414	MSP513
	MVUNR/L2020K16	20	20	125	20	25	45						
	MVUNR/L2525M16	25	25	150	25	32	45						
	MVUNR/L3225P16	32	25	170	32	32	45						
	MVUNR/L3232P16	32	32	170	32	40	45						

# M Type External Turning Tool Holder












MVQNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MVQNR/L1616H16	16	16	100	16	24	36						
	MVQNR/L2020K16	20	20	125	20	27	36						
	MVQNR/L2525M16	25	25	150	25	33	36						
	MVQNR/L3225P16	32	25	170	32	33	36						
	MVQNR/L3232P16	32	32	170	32	40	36						
													




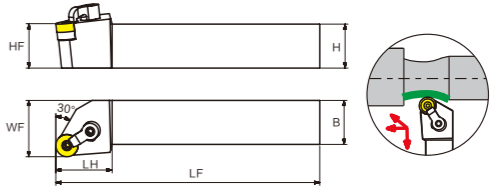







MWLNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MWLNR/L2020K06	20	20	125	20	25	28						
	MWLNR/L2525M06	25	25	150	25	32	30						
	MWLNR/L2020K08	20	20	125	20	26	28						
	MWLNR/L2525M08	25	25	150	25	32	35						
	MWLNR/L3225P08	32	25	170	32	32	35						
	MWLNR/L3232P08	32	32	170	32	40	35						
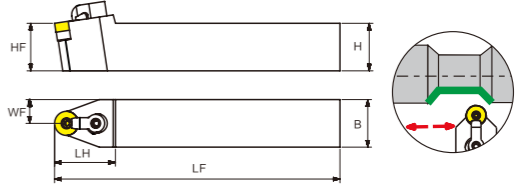
# M Type External Turning Tool Holder




MRGNR/L	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MRGNR/L2020K12	20	20	125	20	25	28						
	MRGNR/L2525M12	25	25	150	25	32	32						
	MRGNR/L3225P12	32	25	170	32	32	32						
	MRGNR/L3232P12	32	32	170	32	39	32						




MRDNN	Type	Dimension						Adaptable Inserts	Clamping Screw	Shim	Wrench	Clamp	Screw
		H	B	LF	HF	WF	LH						
	MRDNN2020K12	20	20	125	20	1 0	30						
	MRDNN2525M12	25	25	150	25	12.5	32						
	MRDNN3225P12	32	25	170	32	12.5	30						
	MRDNN3232P12	32	32	170	32	1 6	30						

# P Type External Turning Tool Holder

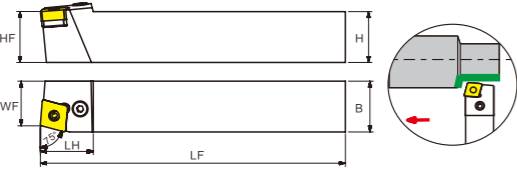


PCBNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin						
		H	B	LF	HF	WF	LH												
	PCBNR/L2020K12	20	20	125	20	17	30												
	PCBNR/L2525M12	25	25	150	25	22	26							CN□□1204□□	VHX0821	PC12318	S3	LV4	SP4
	PCBNR/L3232P12	32	32	170	32	29	27							CN□□1606□□	VHX0825	PC16476	S3	LV5	SP5
	PCBNR/L2525M16	25	25	150	25	22	32												
	PCBNR/L3232P16	32	32	170	32	27	33							CN□□1906□□	VHX1027	PC19476	S4	LV6	SP6
	PCBNR/L3232P19	32	32	170	32	27	38												
	PCBNR/L4040S19	40	40	250	40	35	38							CN□□2507□□	VHX1236	PC25	S5	LV8	SP8
	PCBNR/L4040S2507	40	40	250	40	37	50												
PCBNR/L4040S2509	40	40	250	40	37	50	CN□□2509□□												

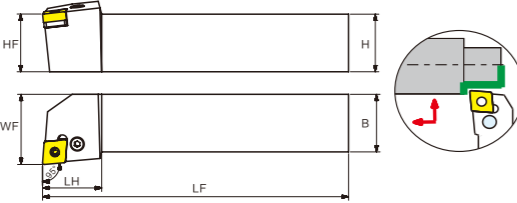


PCLNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin						
		H	B	LF	HF	WF	LH												
	PCLNR/L1616H09	16	16	100	16	20	20												
	PCLNR/L2020K09	20	20	125	20	25	22							CN□□0903□□	VHX0613	PC09318	S2.5	LV3	SP3
	PCLNR/L2525M09	25	25	150	25	32	22							CN□□1204□□	VHX0821	PC12318	S3	LV4	SP4
	PCLNR/L2020K12	20	20	125	20	26	28												
	PCLNR/L2525M12	25	25	150	25	32	28							CN□□1606□□	VHX0825	PC16476	S3	LV5	SP5
	PCLNR/L3232P12	32	32	170	32	39	32												
	PCLNR/L2525M16	25	25	150	25	32	36							CN□□1906□□	VHX1027	PC19476	S4	LV6	SP6
	PCLNR/L3232P16	32	32	170	32	39	36												
	PCLNR/L3232P19	32	32	170	32	40	40							CN□□2507□□	VHX1236	PC25	S5	LV8	SP8
	PCLNR/L4040S19	40	40	250	40	49	40												
PCLNR/L4040S2507	40	40	250	40	50	47	CN□□2507□□												
PCLNR/L4040S2509	40	40	250	40	50	47	CN□□2509□□												

# P Type External Turning Tool Holder

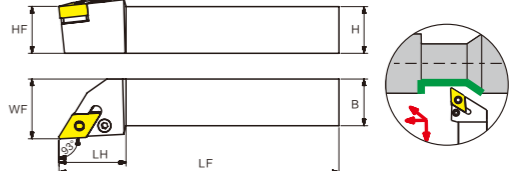


PDJNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin						
		H	B	LF	HF	WF	LH												
	PDJNR/L1616H11	16	16	100	16	20	25												
	PDJNR/L2020K11	20	20	125	20	25	25							DN□□1104□□	VHX0613	PD11270	S2.5	LV3	SP3
	PDJNR/L2525M11	25	25	150	25	30	30							DN□□1506□□	VHX0825	PD15318	S3	LV4B	SP4
	PDJNR/L2020K15	20	20	125	20	25	32												
	PDJNR/L2525M15	25	25	150	25	32	35							DN□□1504□□	VHX0821	PD15318	S3	LV4	SP4
	PDJNR/L3232P15	32	32	170	32	38	35												
	PDJNR/L2020K15-3	20	20	125	20	25	35							DN□□1504□□	VHX0821	PD15318	S3	LV4	SP4
	PDJNR/L2020M15-3	25	25	150	25	32	35												
PDJNR/L3232P15-3	32	32	170	32	38	35													

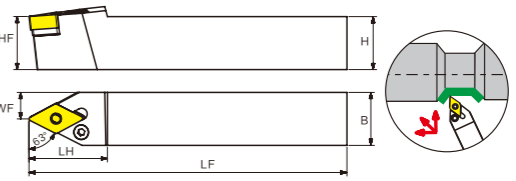


PDNNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin						
		H	B	LF	HF	WF	LH												
	PDNNR/L2020K15	20	20	125	20	8	37												
	PDNNR/L2525M15	25	25	150	25	12.5	37							DN□□1506□□	VHX0825	PD15318	S3	LV4B	SP4
	PDNNR/L3225P15	32	25	170	32	12.5	37							DN□□1504□□	VHX0821	PD15318	S3	LV4	SP4
	PDNNR/L3232P15	32	32	170	32	16	37												
	PDNNR/L2020K15-3	20	20	125	20	8	37							DN□□1504□□	VHX0821	PD15318	S3	LV4	SP4
	PDNNR/L2525M15-3	25	25	150	25	12.5	37												
PDNNR/L3232P15-3	32	32	170	32	16	37													

# P Type External Turning Tool Holder

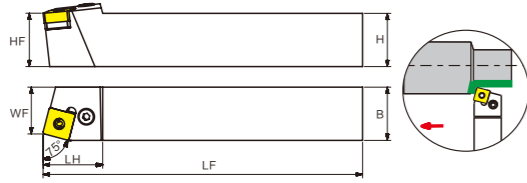


PSB NR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
75°	PSB NR/L1616H09	16	16	100	16	13	21	SN□□0903□□	VHX0613	PS09318	S2.5	LV3	SP3
	PSB NR/L2020K09	20	20	125	20	17	23						
	PSB NR/L2020K12	20	20	125	20	17	28	SN□□1204□□	VHX0821	PS12318	S3	LV4	SP4
	PSB NR/L2525M12	25	25	150	25	22	28						
	PSB NR/L3225P12	32	25	170	32	22	28	SN□□1506□□	VHX0825	PS15476	S3	LV5	SP5
	PSB NR/L3232P12	32	32	170	32	29	28						
	PSB NR/L2525M15	25	25	150	25	22	32	SN□□1906□□	VHX1027	PS19476	S4	LV6	SP6
	PSB NR/L3232P15	32	32	170	32	28	32						
	PSB NR/L3232P19	32	32	170	32	36	45	SN□□2507□□	VHX1236	PS25634	S5	LV8	SP8
	PSB NR/L4040S19	40	40	250	40	35	45						
	PSB NR/L4040S2507	40	40	250	40	35	50	SN□□2509□□	VHX1236	PS25476	S5	LV8	SP8
PSB NR/L4040S2509	40	40	250	40	35	50							

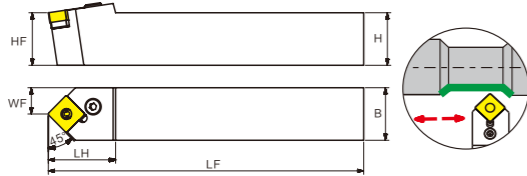


PSD NN	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
45°	PSD NN2020K12	20	20	125	20	10	30	SN□□1204□□	VHX0821	PS12318	S3	LV4	SP4
	PSD NN2525M12	25	25	150	25	12.5	32						
	PSD NN3232P12	32	32	170	32	16	30	SN□□1506□□	VHX0825	PS15476	S3	LV5	SP5
	PSD NN2525M15	25	25	150	25	12.5	40						
	PSD NN3232P15	32	32	170	32	16	40	SN□□1906□□	VHX1027	PS19476	S4	LV6	SP6
	PSD NN3232P19	32	32	170	32	16	40						
	PSD NN4040S19	40	40	250	40	20	40	SN□□2507□□	VHX1236	PS25634	S5	LV8	SP8
	PSD NN4040S2507	40	40	250	40	20	50						
	PSD NN4040S2509	40	40	250	40	20	50	SN□□2509□□	VHX1236	PS25476	S5	LV8	SP8

# P Type External Turning Tool Holder

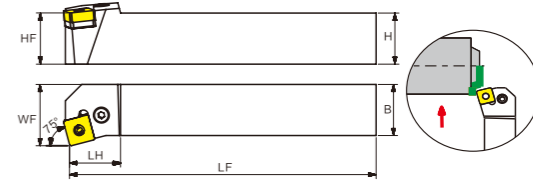


PSK NR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
75°	PSK NR/L1616H09	16	16	100	16	20	17	SN□□0903□□	VHX0613	PS09318	S2.5	LV3	SP3
	PSK NR/L2020K09	20	20	125	20	25	20						
	PSK NR/L2020K12	20	20	125	20	25	26	SN□□1204□□	VHX0821	PS12318	S3	LV4	SP4
	PSK NR/L2525M12	25	25	150	25	30	26						
	PSK NR/L3232P12	32	32	170	32	38	26	SN□□1506□□	VHX0825	PS15476	S3	LV5	SP5
	PSK NR/L2525M15	25	25	150	25	32	32						
	PSK NR/L3232P15	32	32	170	32	38	32	SN□□1906□□	VHX1027	PS19476	S4	LV6	SP6
	PSK NR/L3232P19	32	32	170	32	38	36						
	PSK NR/L4040S19	40	40	250	40	48	32	SN□□2507□□	VHX1236	PS25634	S5	LV8	SP8
	PSK NR/L4040S2507	40	40	250	40	50	40						
	PSK NR/L4040S2509	40	40	250	40	50	40	SN□□2509□□	VHX1236	PS25476	S5	LV8	SP8

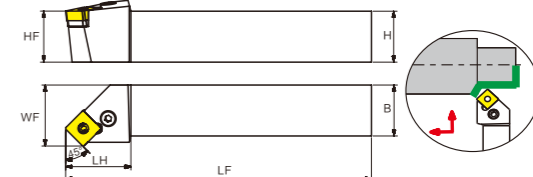


PSS NR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
45°	PSS NR/L1616H09	16	16	100	16	18	25	SN□□0903□□	VHX0613	PS09318	S2.5	LV3	SP3
	PSS NR/L2020K12	20	20	125	20	25	28						
	PSS NR/L2525M12	25	25	150	25	30	32	SN□□1204□□	VHX0821	PS12318	S3	LV4	SP4
	PSS NR/L3232P12	32	32	170	32	38	32						
	PSS NR/L2525M15	25	25	150	25	30	35	SN□□1506□□	VHX0825	PS15476	S3	LV5	SP5
	PSS NR/L3232P15	32	32	170	32	38	35						
	PSS NR/L3232P19	32	32	170	32	38	40	SN□□1906□□	VHX1027	PS19476	S4	LV6	SP6
	PSS NR/L4040S19	40	40	250	40	48	50						
	PSS NR/L4040S2507	40	40	250	40	48	50	SN□□2507□□	VHX1236	PS25634	S5	LV8	SP8
	PSS NR/L4040S2509	40	40	250	40	48	50						
								SN□□2509□□	VHX1236	PS25476	S5	LV8	SP8

# P Type External Turning Tool Holder

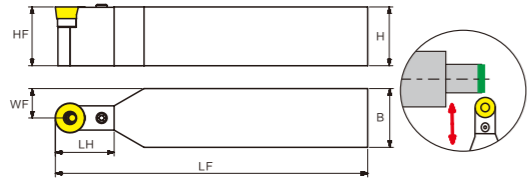


PRDCN	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
	PRDCN2020K12	20	20	125	20	10	25						
	PRDCN2525M12	25	25	150	25	12.5	25						
	PRDCN2525M16	25	25	150	25	10	35						
	PRDCN3232P16	32	32	170	32	16	32						
	PRDCN3232P20	32	32	170	32	16	40						
	PRDCN4040T20	40	40	300	40	20	45						
	PRDCN3232P25	32	32	170	32	16	45						
PRDCN4040T25	40	40	300	40	20	50							

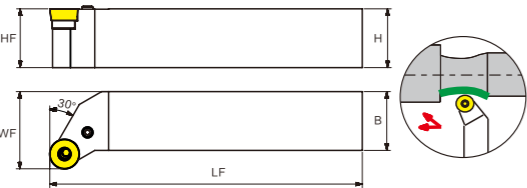


PRGCR/L	Type	Dimension					Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF						
	PRGCR/L2020K12	20	20	125	20	25						
	PRGCR/L2525M12	25	25	150	25	32						
	PRGCR/L2525M16	25	25	150	25	35						
	PRGCR/L3232P16	32	32	170	32	42						
	PRGCR/L3232P20	32	32	170	32	40						
	PRGCR/L4040T20	40	40	300	40	50						
	PRGCR/L3232P25	32	32	170	32	45						
PRGCR/L4040T25	40	40	300	40	56							



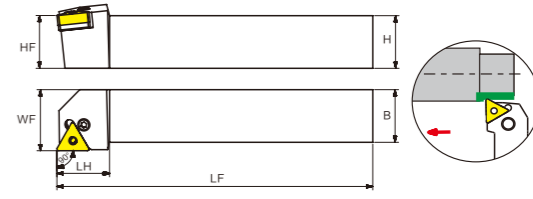






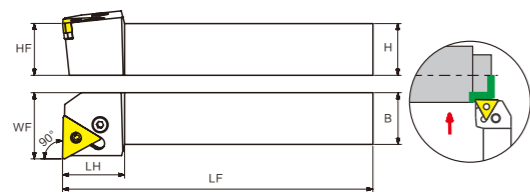









# P Type External Turning Tool Holder

















PTGNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
	90°												
	PTGNR/L1616H11	16	16	100	16	19	18						
	PTGNR/L2020K11	20	20	125	20	24	20						
	PTGNR/L2525M11	25	25	150	25	29	20						
	PTGNR/L1616H16	16	16	100	16	19	22						
	PTGNR/L2020K16	20	20	125	20	23	25						
	PTGNR/L2525M16	25	25	150	25	29	25						
	PTGNR/L3232P16	32	32	170	32	37	32						
	PTGNR/L2525M22	25	25	150	25	30	30						
	PTGNR/L3232P22	32	32	170	32	37	32						
	PTGNR/L3232P27	32	32	170	32	37	38						
	PTGNR/L4040S27	40	40	250	40	47	38						

## P Type External Turning Tool Holder

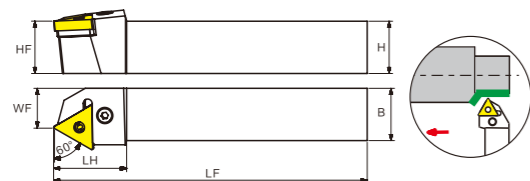





















PTFNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
	PTFNR/L1616H16	16	16	100	16	20	20						
	PTFNR/L2020K16	20	20	125	20	25	20						
	PTFNR/L2525M16	25	25	150	25	30	25						
	PTFNR/L2525M22	25	25	150	25	32	30						
	PTFNR/L3232P22	32	32	170	32	38	30						
	PTFNR/L3232P27	32	32	170	32	38	35						
PTFNR/L4040S27	40	40	250	40	50	34							

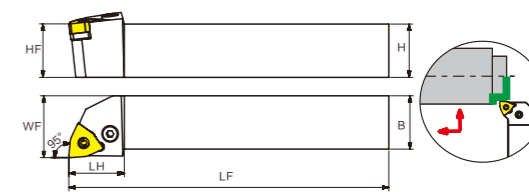


PTTNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
	PTTNR/L1616H16	16	16	100	16	13	25						
	PTTNR/L2020K16	20	20	125	20	17	25						
	PTTNR/L2525M25	25	25	150	25	22	32						

## P Type External Turning Tool Holder




PWLNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		H	B	LF	HF	WF	LH						
	PWLNR/L1616H06	16	16	100	16	19	22						
	PWLNR/L2020K06	20	20	125	20	23	25						
	PWLNR/L2525M06	25	25	150	25	28	25						
	PWLNR/L2020K08	20	20	125	20	25	26						
	PWLNR/L2525M08	25	25	150	25	29	26						
	PWLNR/L3232P08	32	32	170	32	37	26						

# S Type External Turning Tool Holder

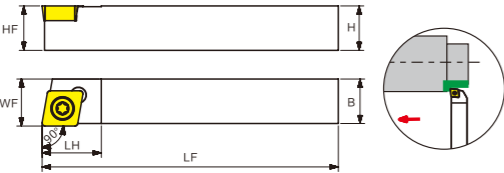


SCACR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SCACR/L1010E06	10	10	70	10	10.5	10		L60M2.5 × 5	T08
	SCACR/L1212F09	12	12	80	12	12.7	16			

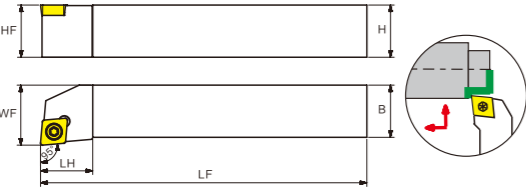


SCLCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SCLCR/L1212F09	12	12	80	12	15	16	CC□T09T3□□	L60M4 × 8	T15
	SCLCR/L1616H09	16	16	100	16	20	16			
	SCLCR/L2020K09	20	20	125	20	23	20			
	SCLCR/L2020K12	20	20	125	20	24	25	CC□T1204□□	L60M5*12	T20
	SCLCR/L2525M12	25	25	150	25	29	25			
	SCLCR/L3225P12	32	32	170	32	29	25			
	SCLCR/L3232P12	32	32	170	32	36	38			

# S Type External Turning Tool Holder

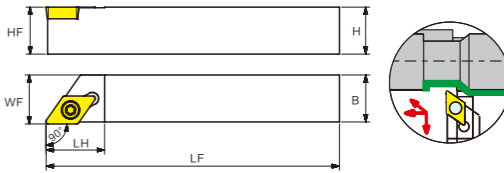


SDACR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SDACR/L1010E07	10	10	70	10	10.5	15	DC□T0702□□	L60M2.5 × 5	T08
	SDACR/L1212F11	12	12	80	12	12.5	20			
	SDACR/L1616H11	16	16	100	16	16.7	20			

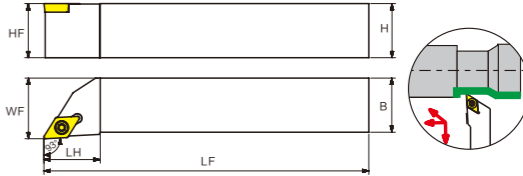


SDJCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SDJCR/L1010E07	10	10	70	10	12	15	DC□T0702□□	L60M2.5 × 5	T08
	SDJCR/L1212F07	12	12	80	12	14	15			
	SDJCR/L1616H07	16	16	100	16	18	18			
	SDJCR/L2020K07	20	20	125	20	22	18	DC□T11T3□□	L60M4 × 8	T15
	SDJCR/L1616H11	16	16	100	16	19	20			
	SDJCR/L2020K11	20	20	125	20	23	26			
	SDJCR/L2525M11	25	25	150	25	28	26			
	SDJCR/L3225P11	32	25	170	32	28	26			
	SDJCR/L3232P11	32	32	170	32	35	31			

# S Type External Turning Tool Holder

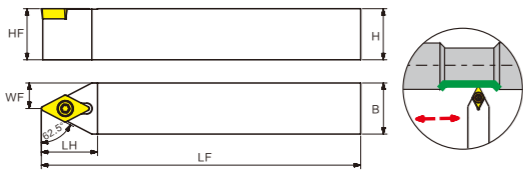


SDNCN	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SDNCN1010E07	10	10	70	10	5	16	DC□T0702□□	L60M2.5 × 5	T08
	SDNCN1212F07	12	12	80	12	6	20			
	SDNCN1212H11	12	12	100	12	6	22	DC□T11T3□□	L60M4 × 8	T15
	SDNCN1616H11	16	16	100	16	8	22			
	SDNCN2020K11	20	20	125	20	10	22			
	SDNCN2525M11	25	25	150	25	12.5	22			

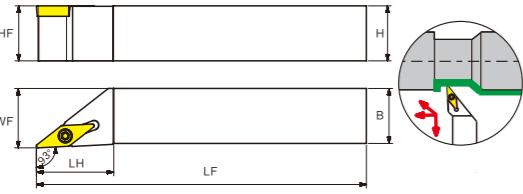


SVJCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SVJCR/L1212F11	12	12	80	12	14	20	VC□T1103□□	L60M2.5 × 5	T08
	SVJCR/L1616H11	16	16	100	16	18	22			
	SVJCR/L2020K11	20	20	125	20	22	27			
	SVJCR/L2525M11	25	25	150	25	27	35	VC□T1604□□	L60M4 × 8	T15
	SVJCR/L1616H16	16	16	100	16	18	32			
	SVJCR/L2020K16	20	20	125	20	22	32			
	SVJCR/L2525M16	25	25	150	25	27	35			
	SVJCR/L3225P16	32	25	170	32	27	35			
SVJCR/L3232P16	32	32	170	32	35	45				

# S Type External Turning Tool Holder

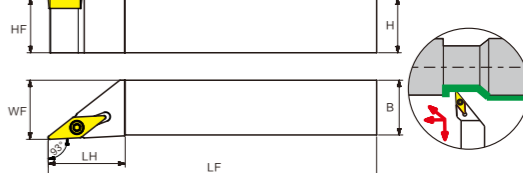


SVJBR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SVJBR/L1212F11	12	12	80	12	14	27	VB□T1103□□	L60M2.5 × 5	T08
	SVJBR/L1616H11	16	16	100	16	18	27			
	SVJBR/L2020K11	20	20	125	20	22	27			
	SVJBR/L2525M11	25	25	150	25	27	27	VB□T1604□□	L60M4 × 8	T15
	SVJBR/L1616H16	16	16	100	16	18	36			
	SVJBR/L2020K16	20	20	125	20	22	41			
	SVJBR/L2525M16	25	25	150	25	27	41			
	SVJBR/L3225P16	32	25	170	32	27	41			
	SVJBR/L3232P16	32	32	170	32	35	41			

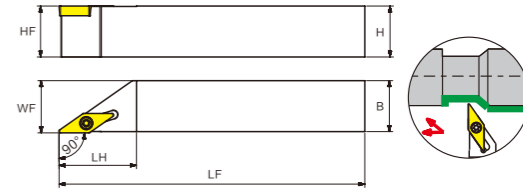


SVABR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SVABR/L1616H16	16	16	100	16	16.5	32	VB□T1604□□	L60M4 × 8	T15
	SVABR/L2020K16	20	20	125	20	20.5	32			
	SVABR/L2525M16	25	25	150	25	25.5	38			

# S Type External Turning Tool Holder

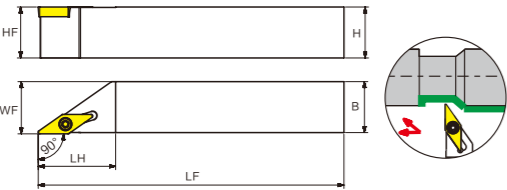


SVACR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SVACR/L1616H16	16	16	100	16	16.5	32	VC□T1604□□	L60M4 × 8	T15
	SVACR/L2020K16	20	20	125	20	20.5	32			
	SVACR/L2525M16	25	25	150	25	25.5	38			

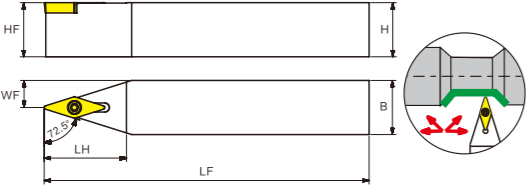


SVVBN	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SVVBN1212F11	12	12	80	12	6	22	VB□T1103□□	L60M2.5 × 5	T08
	SVVBN1616H11	16	16	100	16	8	27			
	SVVBN2020K11	20	20	125	20	10	30			
	SVVBN1616H16	16	16	100	16	8	33	VB□T1604□□	L60M4 × 8	T15
	SVVBN2020K16	20	20	125	20	10	33			
	SVVBN2525M16	25	25	150	25	12.5	38			
	SVVBN3225P16	32	25	170	32	12.5	38			
SVVBN3232P16	32	32	170	32	16	38				

# S Type External Turning Tool Holder

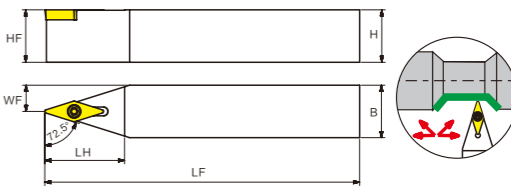


SVVCN	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SVVCN1212F11	12	12	80	12	6	22	VC□T1103□□	L60M2.5 × 5	T08
	SVVCN1616H11	16	16	100	16	8	27			
	SVVCN2020K11	20	20	125	20	10	30			
	SVVCN1616H16	16	16	100	16	8	33	VC□T1604□□	L60M4 × 8	T15
	SVVCN2020K16	20	20	125	20	10	33			
	SVVCN2525M16	25	25	150	25	12.5	38			
	SVVCN3225P16	32	25	170	32	12.5	38			
SVVCN3232P16	32	32	170	32	16	38				

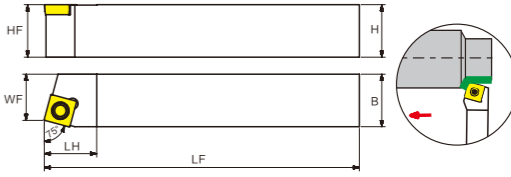


SSBCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SSBCR/L1212F09	12	12	80	12	11	14	SC□T09T3□□	L60M4 × 8	T15
	SSBCR/L1616H09	16	16	100	16	13	16			
	SSBCR/L2020K12	20	20	125	20	17	25			
	SSBCR/L2525M12	25	25	150	25	22	25	SC□T1204□□	L60M5 × 12	T20
	SSBCR/L3232P12	32	32	170	32	27	28			

# S Type External Turning Tool Holder

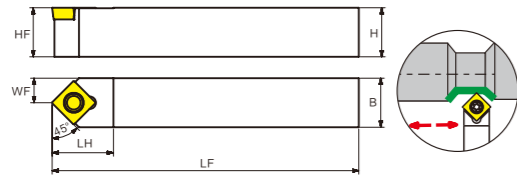


SSDCN	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SSDCN1212F09	12	12	80	12	6	16	SC□T09T3□□	L60M4 × 8	T15
	SSDCN1616H09	16	16	100	16	8	16			
	SSDCN2020K09	20	20	125	20	10	16			
	SSDCN2525M09	25	25	150	25	12.5	25	SC□T1204□□	L60M5 × 12	T20
	SSDCN2020K12	20	20	125	20	10	25			
	SSDCN2525M12	25	25	150	25	12.5	25			
SSDCN3232P12	32	32	170	32	16	25				

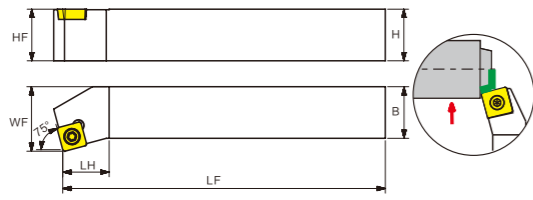


SSKCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SSKCR/L1616H09	16	16	100	16	20	13	SC□T09T3□□	L60M4 × 8	T15
	SSKCR/L2020K09	20	20	125	20	25	18			
	SSKCR/L2020K12	20	20	125	20	20	18	SC□T1204□□	L60M5 × 12	T20
	SSKCR/L2525M12	25	25	150	25	32	22			
	SSKCR/L3232P12	32	32	170	32	40	27			

# S Type External Turning Tool Holder

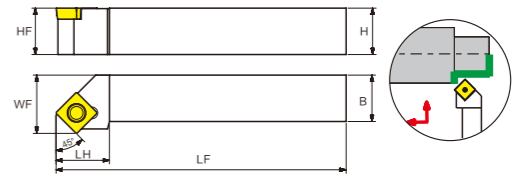


SSSCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SSSCR/L1616H09	16	16	100	16	20	16	SC□T09T3□□	L60M4 × 8	T15
	SSSCR/L2020K09	20	20	125	20	25	20			
	SSSCR/L2020K12	20	20	125	20	20	23	SC□T1204□□	L60M5 × 12	T20
	SSSCR/L2525M12	25	25	150	25	32	25			
	SSSCR/L3232P12	32	32	170	32	40	28			

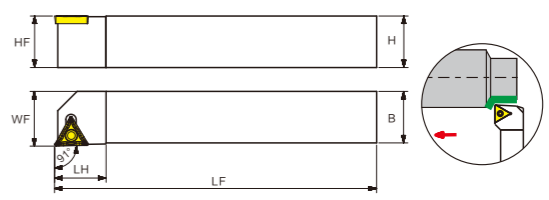


STACR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	STACR/L1212F11	12	12	80	12	12.5	14	TC□T1102□□	L60M2.5 × 5	T08

# S Type External Turning Tool Holder

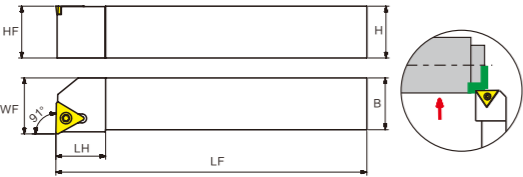


STFCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	STFCR/L1212F11	12	12	80	12	14	14			
	STFCR/L1616H11	16	16	100	16	18	16			
	STFCR/L2020K11	20	20	125	20	22	16			
	STFCR/L1616H16	16	16	100	16	18	19			
	STFCR/L2020K16	20	20	125	20	22	19			
STFCR/L2525M16	25	25	150	25	27	24				

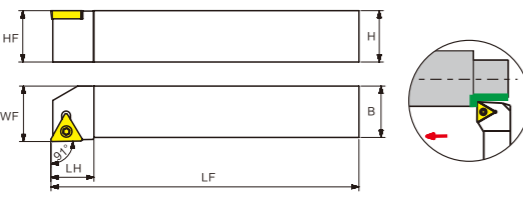


STGCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	STGCR/L0808D09	08	08	60	8	10	11			
	STGCR/L1010E09	10	10	70	10	11	11			
	STGCR/L1212F11	12	12	80	12	14	14			
	STGCR/L1616H11	16	16	100	16	17	16			
	STGCR/L2020K16	20	20	125	20	22	21			
STGCR/L2525M16	25	25	150	25	27	21				

# S Type External Turning Tool Holder

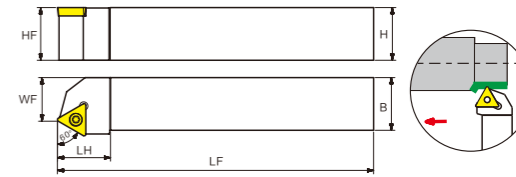


STTCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	STTCR/L1616H11	16	16	100	16	13	14			
	STTCR/L1616H16	16	16	100	16	13	19			
	STTCR/L2020K16	20	20	125	20	17	19			

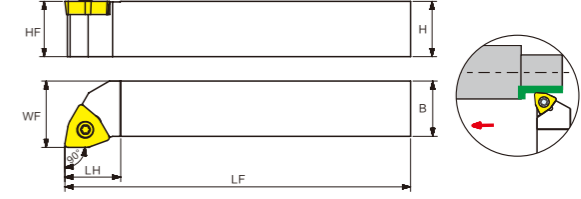


SWACR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		H	B	LF	HF	WF	LH			
	SWACR/L1010E04	10	10	70	10	10.5	10			
	SWACR/L1212F04	12	12	80	12	12.5	14			
	SWACR/L1616H06	16	16	100	16	16.5	20			
	SWACR/L2020K08	20	20	125	20	20.5	24			

# S Type External Turning Tool Holder

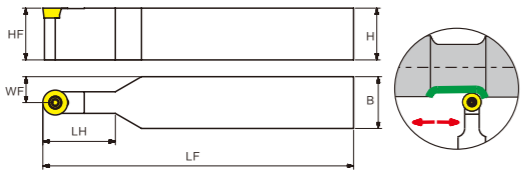


SRDCN	Type	Dimension						Adaptable Inserts	Screw	Wrench	Shim	Shim Screw	Shim Wrench
		H	B	LF	HF	WF	LH						
	SRDCN2020K06	20	20	125	20	10	11	RC□T0602□□	L60M2.5×5	T08	—	—	—
	SRDCN2525M06	25	25	150	25	12.5	11	RC□T0803□□	L60M3×7	T09	—	—	—
	SRDCN2020K08	20	20	125	20	10	16	RC□T0803□□	L60M3×7	T09	—	—	—
	SRDCN2525M08	25	25	150	25	12.5	16	RC□T0803□□	L60M3×7	T09	—	—	—
	SRDCN2020K10	20	20	125	20	10	25	RC□T10T3□□	L60M3.5×10	T15	—	—	—
	SRDCN2525M10	25	25	150	25	12.5	25	RC□T10T3□□	L60M3.5×10	T15	—	—	—
	SRDCN2020K12	20	20	125	20	10	35	RC□T1204□□	L60M3.5×12	T15	—	—	—
	SRDCN2525M12	25	25	150	25	12.5	35	RC□T1204□□	L60M3.5×12	T15	—	—	—
	SRDCN3225P12	32	25	170	32	16	35	RC□T1606□□	L60M4×16	T20	R16BS	SM0614	S4
	SRDCN2525M16	25	25	150	25	12.5	35	RC□T1606□□	L60M4×16	T20	R16BS	SM0614	S4
	SRDCN3232P16	32	32	170	32	16	40	RC□T1606□□	L60M4×16	T20	R16BS	SM0614	S4
	SRDCN3232P20	32	32	170	32	16	40	RCMX2006	L60M5×16-8.1	T20	R20BS	SM0814	S5
	SRDCN4040S20	40	40	250	40	20	40	RCMX2006	L60M5×16-8.1	T20	R20BS	SM0814	S5

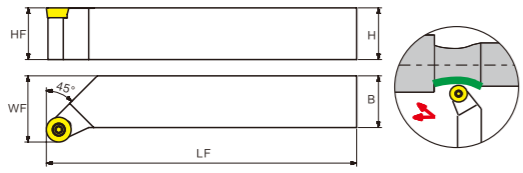

SRGCR/L	Type	Dimension					Adaptable Inserts	Screw	Wrench	Shim	Shim Screw	Shim Wrench
		H	B	LF	HF	WF						
	SRGCR/L2020K10	20	20	125	20	25	RC□T 10T3□□	L60M3.5×10	T15	—	—	—
	SRGCR/L2525M10	25	25	150	25	32	RC□T 10T3□□	L60M3.5×10	T15	—	—	—
	SRGCR/L2020K12	20	20	125	20	27	RC□T 1204□□	L60M3.5×12	T15	—	—	—
	SRGCR/L2525M12	25	25	150	25	32	RC□T 1204□□	L60M3.5×12	T15	—	—	—
	SRGCR/L3225P12	32	25	170	32	32	RC□T 1606□□	L60M4×6	T20	R16BS	Sm0614	S4
	SRGCR/L2525M16	25	25	150	25	32	RC□T 1606□□	L60M4×6	T20	R16BS	Sm0614	S4
	SRGCR/L3232P16	32	32	170	32	40	RC□T 1606□□	L60M4×6	T20	R16BS	Sm0614	S4
	SRGCR/L3232P20	32	32	170	32	40	RCMX2006	L60M5×16-8.1	T20	R20BS	SM0814	S5
SRGCR/L4040S20	40	40	250	40	48	RCMX2006	L60M5×16-8.1	T20	R20BS	SM0814	S5	

# S Type External Turning Tool Holder

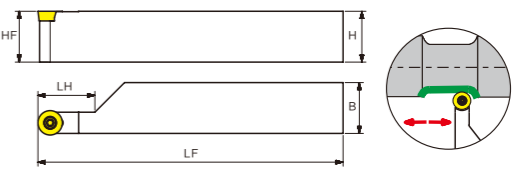

SRACR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench	Shim	Shim Screw	Shim Wrench
		H	B	LF	HF	LH							
	SRACR/L2020K06	20	20	125	20	15	RC□T 0602□□	L60M2.5×5	T08	—	—	—	
	SRACR/L2525M06	25	25	150	25	23	RC□T 0602□□	L60M2.5×5	T08	—	—	—	
	SRACR/L2020K08	20	20	125	20	18	RC□T 0803□□	L60M3×7	T09	—	—	—	
	SRACR/L2525M08	25	25	150	25	23	RC□T 0803□□	L60M3×7	T09	—	—	—	
	SRACR/L2020K10	20	20	125	20	20	RC□T 10T3□□	L60M3.5×10	T15	—	—	—	
	SRACR/L2525M10	25	25	150	25	25	RC□T 10T3□□	L60M3.5×10	T15	—	—	—	
	SRACR/L2020K12	20	20	125	20	28	RC□T 1204□□	L60M3.5×12	T15	—	—	—	
	SRACR/L2525M12	25	25	150	25	28	RC□T 1204□□	L60M3.5×12	T15	—	—	—	
	SRACR/L3225P12	32	25	170	32	28	RC□T 1606□□	L60M4×16	T20	R16BS	SM0614	S4	
	SRACR/L2525M16	25	25	150	25	35	RC□T 1606□□	L60M4×16	T20	R16BS	SM0614	S4	
	SRACR/L3232P16	32	32	170	32	40	RC□T 1606□□	L60M4×16	T20	R16BS	SM0614	S4	
	SRACR/L3232P20	32	32	170	32	40	RCMX2006	L60M5×16-8.1	T20	R20BS	SM0814	S5	
	SRACR/L4040S20	40	40	250	40	55	RCMX2006	L60M5×16-8.1	T20	R20BS	SM0814	S5	

# Internal Turning Tool Holder Naming Rule

## Tool Holder Type

**S** 25 **R** - **P** **C** **L** **N** **R** 09

代号 Symbol	<b>A</b>	<b>E</b>	<b>C</b>	<b>S</b>	<b>X</b>	
Type of shank	Steel shank+oil cooling hole	Carbide shank+oil cooling hole	Carbide shank	Steel shank	Special insert application	

## Tool Holder Diameter

**S** **25** **R** - **P** **C** **L** **N** **R** 09

Tool holder diameter

## Tool Length

**S** 25 **R** - **P** **C** **L** **N** **R** 09

<b>H</b>	<b>K</b>	<b>M</b>	<b>N</b>	<b>Q</b>	<b>R</b>	<b>S</b>	<b>T</b>	<b>U</b>	<b>V</b>
100	125	150	160	180	200	250	300	350	400

## Clamping System

**S** 25 **R** - **P** **C** **L** **N** **R** 09

<b>M</b>	<b>P</b>	<b>S</b>
Top and hole clamping	hole clamping	Screw on

## Insert Shape

**S** 25 **R** - **P** **C** **L** **N** **R** 09

<b>C</b>	<b>R</b>	<b>T</b>	<b>W</b>	<b>D</b>	<b>S</b>	<b>V</b>

# Internal Turning Tool Holder Naming Rule

## Tool Holder Style and Leading Angle

**S** 25 **R** - **P** **C** **L** **N** **R** 09

<b>P</b>	<b>U</b>	<b>K</b>	<b>L</b>	<b>F</b>

## Clearance Angle

**S** 25 **R** - **P** **C** **L** **N** **R** 09

<b>B</b>	<b>C</b>	<b>P</b>	<b>N</b>

## Cutting Direction

**S** 25 **R** - **P** **C** **L** **N** **R** 09


<b>R</b>	<b>L</b>








## Cutting Edge Length

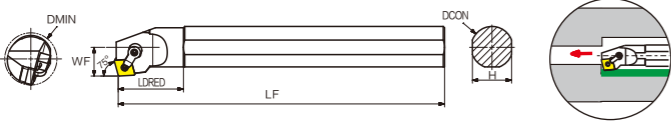
**S** 25 **R** - **P** **C** **L** **N** **R** 09








<b>D</b>	<b>T</b>	<b>C</b>	<b>S</b>	<b>V</b>
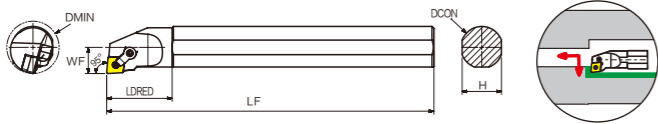
# M Type Internal Turning Tool Holder










MCKNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench	
		DMIN	DCON	H	LF	WF	LDRED							
	S20Q-MCKNR/L12	26	20	18	180	14	35							
	S25R-MCKNR/L12	32	25	23	200	16.5	35							
	S32S-MCKNR/L12	40	32	30	250	22	50							CN□□1204□□
	S40T-MCKNR/L12	50	40	38	300	26	55							MC1204
	S50U-MCKNR/L12	60	50	48	350	30	60							MSP617










MCLNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench	
		Dmin	DCON	H	LF	WF	LDRED							
	S20Q-MCLNR/L12	26	20	18	180	13	40							
	S25R-MCLNR/L12	32	25	23	200	16	40							
	S32S-MCLNR/L12	40	32	30	250	20	50							CN□□1204□□
	S40T-MCLNR/L12	50	40	37	300	26	55							MC1204
	S50U-MCLNR/L12	60	50	46	350	31	70							MSP617

# M Type Internal Turning Tool Holder









MDQNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench	
		DMIN	DCON	H	LF	WF	LDRED							
	S20Q-MDQNR/L1504	26	20	18	180	13	40							
	S25R-MDQNR/L1504	32	25	23	200	17	45							
	S32S-MDQNR/L1504	40	32	30	250	20	55							DN□□1504□□
	S40T-MDQNR/L1504	50	40	38	300	24	55							MD1504
	S32S-MDQNR/L1506	40	32	30	250	20	55							DN□□1506□□
	S40T-MDQNR/L1506	50	40	38	300	24	55							MSP619









MDUNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench	
		DMIN	DCON	H	LF	WF	LDRED							
	S20Q-MDUNR/L1504	28	20	18	180	17	40							
	S25R-MDUNR/L1504	32	25	24	200	19	40							
	S32S-MDUNR/L1504	40	32	30	250	22	45							DN□□1504□□
	S40T-MDUNR/L1504	50	40	37	300	26	55							MD1504
	S32S-MDUNR/L1506	40	32	30	250	22	45							DN□□1506□□
	S40T-MDUNR/L1506	50	40	37	300	26	55							MSP619

# M Type Internal Turning Tool Holder









MDZNR/L	Type	Dimension								Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench					
		DMIN	DCON	H	LF	WF	LDRED	F2												
	S25R-MDZNR/L1504	36	25	23	200	22	35	11		X	MSP613				S2.5 S3					
	S32S-MDZNR/L1504	43	32	30	250	26	40	12							DN□□1504□□	MD1504	MSP617	MCL1814	WS061025	S3
	S40T-MDZNR/L1504	50	40	37	300	29	50	11.5							DN□□1506□□					
	S32S-MDZNR/L1506	43	32	30	250	26	40	12												
	S40T-MDZNR/L1506	50	40	37	300	29	50	11.5												









MSKNR/L	Type	Dimension								Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench					
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2											
	S20Q-MSKNR/L12	26	20	18	180	13	15°	31		X	MSP613				S2.5 S3					
	S25R-MSKNR/L12	32	25	23	200	17	12°	35								SN□□1204□□				
	S32S-MSKNR/L12	40	32	30	250	22	17°	40									MS1204	MSP617	MCL1810	WS061020
	S40T-MSKNR/L12	50	40	37	300	27	15°	50												

# M Type Internal Turning Tool Holder




MVQNR/L	Type	Dimension								Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench				
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2										
	S25R-MVQNR/L16	32	25	23	200	17	12°	40		X	MSP510				S2 S3				
	S32S-MVQNR/L16	42	32	30	250	22	17°	40							VN□□1604□□	MV1603	MSP513	MCL2414	WS061025
	S40T-MVQNR/L16	50	40	37	300	27	15°	50											




MVUNR/L	Type	Dimension								Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench					
		DMIN	DCON	H	LF	WF	LDRED	F2												
	S25R-MVUNR/L16	36	25	23	200	20	40	8		X	MSP510				S2 S3					
	S32S-MVUNR/L16	42	32	30	250	23	40	8								VN□□1604□□	MV1603	MSP513	MCL1814	WS061025
	S40T-MVUNR/L16	50	40	37	300	27	55	10												

# M Type Internal Turning Tool Holder




MVWNR/L	Type	Dimension							Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED	F2						
72.5°	S25R-MVWNR/L16	36	25	23	200	22	35	10	VN□□1604□□	X	MSP510	MCL1814	WS061025	S2 S3
	S32S-MVWNR/L16	48	32	30	250	25	40	10		MV1603	MSP513			
	S40T-MVWNR/L16	56	40	37	300	29	45	11						

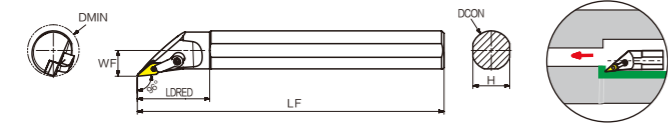


MVXNR/L	Type	Dimension							Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED	F2						
96°	S25R-MVXNR/L16	32	25	23	200	17	55	VN□□1604□□	X	MSP510	MCL2414	WS061025	S2 S3	
	S32S-MVXNR/L16	42	32	30	250	21	60		MV1603	MSP513				
	S40T-MVXNR/L16	50	40	38	300	25	68							

# M Type Internal Turning Tool Holder




MWLNR/L	Type	Dimension							Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench	
		DMIN	DCON	H	LF	WF	LDRED	F2							
95°	S20Q-MWLNR/L08	25	20	18	180	14.5	36	WN□□0804□□	X	MSP613	MCL1810	WS061020	S2.5 S3		
	S25R-MWLNR/L08	32	25	23	200	17	40							MW0804	MSP617
	S32S-MWLNR/L08	41	32	30	250	22	50								
	S40T-MWLNR/L08	50	40	37	300	27	55								

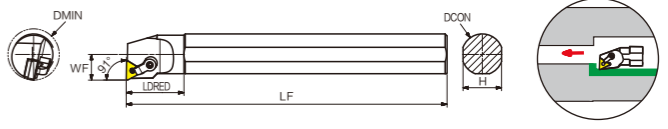


MTFNR/L	Type	Dimension							Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench	
		DMIN	DCON	H	LF	WF	LDRED	F2							
91°	S20Q-MTFNR/L16	25	20	18	180	13	35	TN□□1604□□	X	MSP510	MCL1810	WS061020	S2 S3		
	S25R-MTFNR/L16	32	25	23	200	16	40							MT1603	MSP513
	S32S-MTFNR/L16	40	32	30	250	20	45								
	S40T-MTFNR/L16	50	40	37	300	25	50								

# M Type Internal Turning Tool Holder

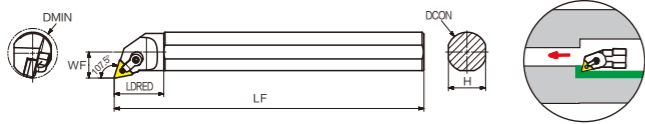

MTQNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED						
	S20Q-MTQNR/L16	25	20	18	180	14	35						
	S25R-MTQNR/L16	32	25	23	200	18	35						
	S32S-MTQNR/L16	40	32	30	250	21	40						
	S40T-MTQNR/L16	50	40	37	300	25	50						

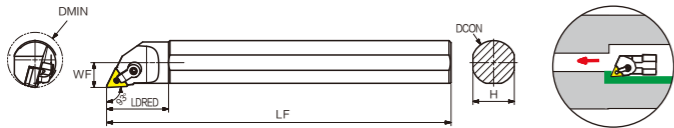


MTJNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED						
	S25R-MTJNR/L16	32	25	23	200	15	40						
	S32S-MTJNR/L16	40	32	30	250	18	45						
	S40T-MTJNR/L16	50	40	37	300	24	55						

# M Type Internal Turning Tool Holder




MTUNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED						
	S20Q-MTUNR/L16	25	20	18	180	13	31						
	S25R-MTUNR/L16	32	25	23	200	17	35						
	S32S-MTUNR/L16	40	32	30	250	22	40						
	S40T-MTUNR/L16	50	40	37	300	23	50						

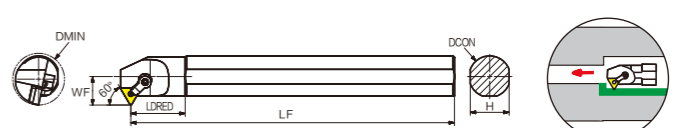



MTWNR/L	Type	Dimension						Adaptable Inserts	Shim	Clamping Stud	Clamp	Clamping Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED						
	S20Q-MTWNR/L16	27	20	18	180	15	31						
	S25R-MTWNR/L16	32	25	23	200	17	35						
	S32S-MTWNR/L16	40	32	30	250	22	42						
	S40T-MTWNR/L16	50	40	38	300	27	50						

# P Type Internal Turning Tool Holder





PCLNR/L	Type	Dimension								Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		DMIN	DCON	H	LF	WF	θ°	LDRED							
	S16Q-PCLNR/L09	20	16	15	180	10	-12°	30	CN□□0903□□	VHX0509	—	S2	LV3C	—	
	S20Q-PCLNR/L09	25	20	18	180	12	-11°	30							
	S25R-PCLNR/L09	32	25	23	200	15	-10°	35	VHX0613	—	S2.5	LV4A	—		
	S20Q-PCLNR/L12	25	20	18	180	13	-11°	35							
	S25R-PCLNR/L12	32	25	23	200	15	12°	40	CN□□1204□□	VHX0821	PC12318	S3	LV4	SP4	
	S32S-PCLNR/L12	44	32	30	250	22	-10°	50							
	S40T-PCLNR/L12	54	40	37	300	24	-10°	55	VHX1027	PC19476	S4	LV6	SP6		
	S50U-PCLNR/L12	63	50	47	350	27	-10°	58							
S50U-PCLNR/L19	63	50	47	350	32	-10°	70								





PDSNR/L	Type	Dimension								Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		DMIN	DCON	H	LF	WF	LDRED	F2							
	S32S-PDSNR/L15	40	32	30	250	23.5	45	9	DN□□1506□□	VHX0821	PD15318	S3	LV4B	SP4	
	S40T-PDSNR/L15	50	40	37	300	28.5	43	11							
	S32S-PDSNR/L15-3	40	32	30	250	23.5	45	9	DN□□1504□□	VHX0821	PD15318	S3	LV4	SP4	
	S40T-PDSNR/L15-3	50	40	37	300	28.5	43	11							

# P Type Internal Turning Tool Holder




PDUNR/L	Type	Dimension								Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		DMIN	DCON	H	LF	WF	θ°	LDRED							
	S20Q-PDUNR/L11	25	20	18	180	13	-16°	30	DN□□1104□□	VHX0512	—	S2	LV3D	—	
	S25R-PDUNR/L11	32	25	23	200	17	-13°	35							
	S32S-PDUNR/L11	40	32	30	250	22	-16°	40	DN□□1506□□	VHX0617	PD11270	S2.5	LV3	SP3	
	S32S-PDUNR/L15	40	32	30	250	22	-16°	50							
	S40T-PDUNR/L15	50	40	37	300	27	-11°	50	DN□□1504□□	VHX0821	PD15318	S3	LV4B	SP4	
	S32S-PDUNR/L15-3	40	32	30	250	22	-16°	50							
S40T-PDUNR/L15-3	50	40	37	300	27	-11°	50								




PSKNR/L	Type	Dimension								Adaptable Inserts	Screw	Shim	Wrench	Lever	Shim Pin
		DMIN	DCON	H	LF	WF	θ°	LDRED							
	S25R-PSKNR/L12	32	25	23	200	17	-12°	42	SN□□1204□□	VHX0613	—	S2.5	LV4A	—	
	S32S-PSKNR/L12	44	32	30	250	22	-10°	45							
	S40T-PSKNR/L12	54	40	37	300	27	-10°	50	VHX0821	PS12318	S3	LV4	SP4		

# P Type Internal Turning Tool Holder




PTFNR/L	Type	Dimension						Adaptable Inserts	Screw	Shim	Wrench	Lever	Cushion Block					
		DMIN	DCON	H	LF	WF	LDRED											
	S16Q-PTFNR/L11	20	16	15	180	11	28	TN□□1103□□	VHX0509	—	S2	LV2	—					
	S20Q-PTFNR/L11	25	20	18	180	13	31											
	S25R-PTFNR/L11	32	25	23	200	17	35	TN□□1604□□	VHX0512	—	S2	LV3B	—					
	S25R-PTFNR/L16	32	25	23	200	17	42											
	S32S-PTFNR/L16	44	32	30	250	22	50							VHX0613	PT16476	S2.5	LV3	SP3
	S40T-PTFNR/L16	54	40	37	300	27	55											




PWLNR/L	Type	Dimension							Adaptable Inserts	Screw	Shim	Wrench	Lever	Cushion Block				
		DMIN	DCON	H	LF	WF	θ°	LDRED										
	S16Q-PWLNR/L06	20	16	15	180	11	-13°	25	WN□□0604□□	VHX0512	—	S2	LV3B	—				
	S20Q-PWLNR/L06	25	20	18	180	13	-13°	32										
	S25R-PWLNR/L06	32	25	23	200	17	-13°	35										
	S20Q-PWLNR/L08	25	20	18	180	13	-13°	32	WN□□0804□□	VHX0613	—	S2.5	LV4A	—				
	S25R-PWLNR/L08	32	25	23	200	17	-13°	45										
	S32S-PWLNR/L08	40	32	30	250	22	-13°	50							VHX0821	PW08318	S3	LV4A
S40T-PWLNR/L08	50	40	42	300	30	-13°	55											

# S Type Internal Turning Tool Holder





SCLCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED			
	S07K-SCLCR/L06	9	7	6	125	4.6	15	CC□T0602□□	L60M2.5×5	T08
	S08K-SCLCR/L06	10	8	7	125	4.5	14			
	S10K-SCLCR/L06	12	10	9	125	6	17			
	S12M-SCLCR/L06	16	12	11	150	7	17			
	S12M-SCLCR/L09	16	12	11	150	8	25	CC□T09T3□□	L60M4×8	T15
	S16Q-SCLCR/L09	20	16	15	180	9	27			
	S20Q-SCLCR/L09	25	20	18	180	11	28			
	S25R-SCLCR/L09	32	25	23	200	14	35			
	S25R-SCLCR/L12	32	25	23	250	17	34	CC□T1204□□	L60M5×12	T20
	S32S-SCLCR/L12	36	32	30	250	18	45			
S40T-SCLCR/L12	50	40	37	300	27	60				




SCLCR/L-H	Type	Dimension							Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED			
	S08K-SCLCR/L06H09	9	8	7	125	4.3	-15°	15	CC□T0602□□	L60M2.5×5	T08
	S10K-SCLCR/L06H09	11	10	9	125	5.5	-15°	16			
	S12M-SCLCR/L06H09	13	12	11	150	6.5	-10°	17			
	S16Q-SCLCR/L09H09	17	16	15	180	8.5	-12°	27			

# S Type Internal Turning Tool Holder





SCKCR/L	Type	Dimension							Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED			
	S08K-SCKCR/L06	10	8	7.5	125	5.5	13°	15	CC□T0602□□	L60M2.5×5	T08
	S10K-SCKCR/L06	13	10	9	125	7	12°	15			
	S12M-SCKCR/L06	16	12	11	150	8	10°	20			
	S12M-SCKCR/L09	16	12	11	150	8	12°	20	CC□T09T3□□	L60M4×8	T15
	S16Q-SCKCR/L09	20	16	15	160	10	10°	25			
	S20Q-SCKCR/L09	24	20	19	180	13	8°	30			
	S25R-SCKCR/L09	31	26	24	200	16	8°	35			




SDQCR/L	Type	Dimension							Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED			
	S08K-SDQCR/L07	10	8	7	125	6	-8°		DC□T0702□□	L60M2.5×5	T08
	S10K-SDQCR/L07	13	10	9	150	7	-8°	20			
	S12M-SDQCR/L07	16	12	11	150	9	-8°	22			
	S16Q-SDQCR/L07	20	16	15	180	11	-6°	27	DC□T11T3□□	L60M4×8	T15
	S20Q-SDQCR/L11	25	20	18	180	13	-6°	35			
	S25R-SDQCR/L11	32	26	23	200	17	-6°	38			

# S Type Internal Turning Tool Holder




SDXCR	Type	Dimension							Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED			
	S10K-SDXCR/07	13	10	9	125	7	-8°	18	DC□T0702□□	L60M2.5×5	T08
	S12M-SDXCR/07	16	12	11	150	8	-8°	20			
	S16Q-SDXCR/07	20	16	15	180	10	-6°	25			
	S20Q-SDXCR/11	25	20	18	180	13	-6°	33	DC□T11T3□□	L60M4×8	T15
	S25R-SDXCR/11	32	25	23	200	16	-6°	32			




SDWCR/L	Type	Dimension								Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2			
	S12M-SDWCR/L07	19	12	11	125	11	-8°	15	5.5	DC□T0702□□	L60M2.5×5	T08
	S16Q-SDWCR/L07	23	16	15	180	12.5	-8°	15	5			
	S20Q-SDWCR/L07	27	20	19	180	14.5	-8°	22	5.5			
	S20Q-SDWCR/L11	27	20	19	180	14.5	-6°	25	6	DC□T11T3□□	L60M4×8	T15
	S25R-SDWCR/L11	32	25	24	200	18	-6°	25	7			
	S32S-SDWCR/L11	40	32	30	250	21.5	-6°	40	6.5			

# S Type Internal Turning Tool Holder




SDUCR/L	Type	Dimension									Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2				
	S08K-SDUCR/L07	13	8	7.5	125	8	-8°		4				
	S10K-SDUCR/L07	13	10	9	125	7.7	-8°		3				
	S12M-SDUCR/L07	16	12	11	150	8.5	-8°		3				
	S16Q-SDUCR/L07	20	16	15	180	11	-6°		3.5				
	S20Q-SDUCR/L11	25	20	18	180	14.5	-6°		5.5				
	S25R-SDUCR/L11	32	25	23	200	18.5	-6°		7				




SDZCR/L	Type	Dimension									Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2				
	S20Q-SDZCR/L11	27	20	18	180	15	-6°		7.5				
	S25R-SDZCR/L11	33	25	23	200	17	-6°		7.5				
	S32S-SDZCR/L11	40	32	30	250	22	-6°		8.4				
	S40T-SDZCR/L11	50	40	37	300	27	-4°		9.4				

# S Type Internal Turning Tool Holder




SSKCR/L	Type	Dimension									Adaptable Inserts	Screw	Wrench		
		DMIN	DCON	H	LF	WF	θ°	LDRED							
	S12M-SSKCR/L09	16	12	11	150	9	-10°		25						
	S16Q-SSKCR/L09	20	16	15	180	11	-11°		30						
	S20Q-SSKCR/L09	25	20	18	180	13	-6°		35						
	S25R-SSKCR/L09	32	25	23	200	17	-8°		40						
	S25R-SSKCR/L12	32	25	23	200	17	-8°		40						
	S32S-SSKCR/L12	40	32	30	250	22	-10°		45						




SSSCR/L	Type	Dimension									Adaptable Inserts	Screw	Wrench		
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2						
	S12M-SSSCR/L09	17	12	11	150	10	-10°		4.5						
	S16Q-SSSCR/L09	22	16	15	180	13	-11°		5.5						
	S20Q-SSSCR/L09	25	20	18	180	15	-6°		6						
	S25R-SSSCR/L09	32	25	23	200	17	-8°		5.5						
	S25R-SSSCR/L12	32	25	23	200	17	-8°		5.5						
	S32S-SSSCR/L12	40	32	30	250	22	-10°		7						

# S Type Internal Turning Tool Holder




STFCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED			
	S08K-STFCR/L09	10	8	7	125	5.5	8	TC□T0902□□	L60M2.5×5	T08
	S10K-STFCR/L09	12	10	9	125	6.8	10			
	S12M-STFCR/L09	16	12	11	150	8	10			
	S12M-STFCR/L11	14	12	11	150	6.5	25	TC□T1102□□	L60M2.5×5	T08
	S16Q-STFCR/L11	18	16	15	180	9	25			
	S20Q-STFCR/L11	25	20	18	180	11	25			
	S25R-STFCR/L16	32	25	23	200	17	40	TC□T16T3□□	L60M4×8	T15
	S32S-STFCR/L16	36	32	30	250	18	50			
S40T-STFCR/L16	50	40	37	300	25	60				

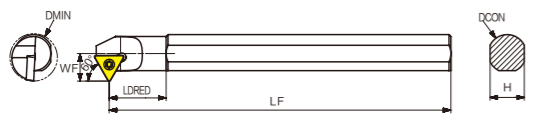


STWCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench	
		DMIN	DCON	H	LF	WF	θ°				LDRED
	S10K-STWCR/L11	14	10	9	125	8	-10°	14	TC□T1102□□	L60M2.5×5	T08
	S12M-STWCR/L11	16	12	11	150	9	-13°	25			
	S16Q-STWCR/L11	20	16	15	180	11	-10°	30			
	S20Q-STWCR/L11	25	20	19	180	13	-6°	30	TC□T16T3□□	L60M4×8	T15
	S25R-STWCR/L11	32	25	24	200	17	-6°	35			
	S20Q-STWCR/L16	25	20	19	180	14.5	-3°	36			
	S25R-STWCR/L16	32	25	24	200	17	-6°	49	TC□T16T3□□	L60M4×8	T15
	S32S-STWCR/L16	39	32	30	250	22	-10°	50			
S40T-STWCR/L16	50	40	38	300	25	-8°	50				

# S Type Internal Turning Tool Holder




STFPR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench	
		DMIN	DCON	H	LF	WF	θ°				LDRED
	S08K-STFPR/L09	10	08	7	125	5	-10°	14	TP□T0902□□	L60M2.5×5	T08
	S10K-STFPR/L11H11	11	10	9	125	5.5	-13°				
	S12M-STFPR/L11H13	13	12	11	150	6.8	-10°		TP□T1103□□	L60M2.5×5	T08
	S16Q-STFPR/L11H17	17	16	15	180	8.8	-6°				




STUCR/L	Type	Dimension						Adaptable Inserts	Screw	Wrench	
		DMIN	DCON	H	LF	WF	θ°				LDRED
	S08K-STUCR/L09	11	08	7	125	5.5	-15°		TC□T0902□□	L60M2.2×6	T06
	S08K-STUCR/L09-A16	11	16	15	125	5.5	-15°	24			
	S10K-STUCR/L09	13	10	9	125	6	-13°	10			
	S10K-STUCR/L09-A16	13	16	15	125	7	-13°	30	TC□T1102□□	L60M2.5×5	T08
	S10K-STUCR/L11	13	10	9	125	7	-12°	10			
	S10K-STUCR/L11-A16	16	16	15	125	7	-12°	30			
	S12M-STUCR/L11	16	12	11	150	7	-10°	25	TC□T1102□□	L60M2.5×5	T08
	S12M-STUCR/L11-A16	16	16	15	150	7	-10°	30			
	S16Q-STUCR/L11	20	16	15	160	9	-8°	25			
	S20Q-STUCR/L11	25	20	19	180	11	-6°	25	TC□T16T3□□	L60M4×8	T15
	S25R-STUCR/L11	31	25	24	200	15	-4°	34			
	S20Q-STUCR/L16	25	20	19	180	13	-8°	36			
	S25R-STUCR/L16	31	25	24	200	17	-6°	40	TC□T16T3□□	L60M4×8	T15
	S32S-STUCR/L16	39	32	30	250	18	-4°	50			
S40T-STUCR/L16	50	40	38	300	25	-2°	60				

# S Type Internal Turning Tool Holder




SVQCR/L	Type	Dimension									Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2				
	S20Q-SVQCR/L16	27	20	18	180	15	-8°	40	6.0	VC□T1604□□	L60M4 × 8	T15	
	S25S-SVQCR/L16	32	25	23	200	18.5	-8°	45	6.9				
	S32S-SVQCR/L16	40	32	30	250	22	-8°	56	8.4				
	S40T-SVQCR/L16	50	40	37	300	27	-8°	64	9.4				

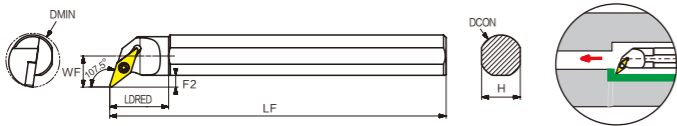


SVQBR/L	Type	Dimension									Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	θ°	LDRED	F2				
	S20Q-SVQBR/L16	27	20	18	180	15	-8°	40	6.0	VB□T1604□□	L60M4 × 8	T15	
	S25S-SVQBR/L16	32	25	23	200	18.5	-8°	45	6.9				
	S32S-SVQBR/L16	40	32	30	250	22	-8°	56	8.4				
	S40T-SVQBR/L16	50	40	37	300	27	-8°	64	9.4				

# S Type Internal Turning Tool Holder




SVUCR/L	Type	Dimension								Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED	F2				
	S16Q-SVUCR/L11	22	16	15	180	13.5	24	6	VC□T1103□□	L60M2.5 × 5	T08	
	S20Q-SVUCR/L16	31	20	19	180	19	32	9.5	VC□T1604□□	L60M4 × 8	T15	
	S25R-SVUCR/L16	35	25	23	180	20	32	8.4				
	S32S-SVUCR/L16	42	32	30	250	22	49	8.4				
	S40T-SVUCR/L16	51	40	37	300	27	49	11				




SVWCR/L	Type	Dimension								Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED	F2				
	S16Q-SVWCR/L11	25	16	15	180	14	25	6.9	VC□T1103□□	L60M2.5 × 5	T08	
	S20Q-SVWCR/L16	32	20	18	180	22	25	12.9	VC□T1604□□	L60M4 × 8	T15	
	S25R-SVWCR/L16	36	25	23	200	22	30	10				
	S32S-SVWCR/L16	45	32	30	250	27	42	12.2				
	S40T-SVWCR/L16	55	40	37	300	30	50	11				

# S Type Internal Turning Tool Holder



SVXCR/L	Type	Dimension							Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED	F2			
	S16Q-SVXCR/L11	20	16	15	180	9.5	35	2	VC□T1103□□	L60M2.5 × 5	T08
	S20Q-SVXCR/L16	25	20	18	180	13	40	4			
	S25R-SVXCR/L16	32	25	23	180	14.5	40	3	VC□T1604□□	L60M4 × 8	T15
	S32S-SVXCR/L16	40	32	30	250	21	62	6			
	S40T-SVXCR/L16	50	40	37	300	24	62	5.5			

# S Type Internal Turning Tool Holder



SVZCR/L	Type	Dimension							Adaptable Inserts	Screw	Wrench
		DMIN	DCON	H	LF	WF	LDRED	F2			
93° 	S16Q-SVZCR/L11	22	16	15	180	13.5	15	6.5	VC□T1103□□	L60M2.5 × 5	T08
	S20Q-SVZCR/L11	28	20	18	180	16	22	7.5			
	S25R-SVZCR/L16	34	25	23	200	21	30	10	VC□T1604□□	L60M4 × 8	T15
	S32S-SVZCR/L16	42	32	30	250	23	35	9			
	S40T-SVZCR/L16	50	40	37	300	29	40	11			

# Parting and Grooving Holder Naming Rule

## External and End Face Parting and Grooving Cutting Tools

**Q F G D 25 25 R 22 52 H**

Q	F	G	D	25	25	R	22	52	H
Application code Q:parting and grooving P:part off	Cutting application E:external cutting F:end face cutting	Positioning slot code	Cutting edge number S:single head D:double heads	Tool body height	Tool body width	Cutting direction R:right L:left N:neutral	Max cutting depth	The minimum diameter for initial end face cutting	End face cutting shank type: H: straight L: bend

## Grooving Tool

**C 32 S - Q G D R 11 - 44**


C	32	S	Q	G	D	R	11	44
Clamp type	Holder diameter	Holder length	Application code	Positioning slot code	Cutting edge number	Cutting direction (R:right L:left)	Max cutting depth	Min diameter

## Part off Blade

**P H S 32 32**

P	H	S	32	32
Parting off cutting tools	Parting off tool base	Cutting edges numbers of insert	Blade model code	Blade height


# External and End Face Parting and Grooving Cutting Tools

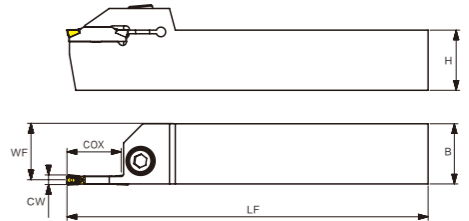

Type	Dimension					Adaptable Inserts	Screw	Wrench
	HxB	LF	WF	CW	CDX			
QEED	1616R/L10	16x16	100	15	2.5	10	M6 × 20	S5
	1616R/L17	16x16	100	15	2.5	17		
	2020R/L10	20x20	125	19	2.5	10		
	2020R/L17	20x20	125	19	2.5	17		
	2525R/L10	25x25	150	24	2.5	10		
QEFD	1616R/L10	16x16	100	14.8	3	10	M6 × 20	S5
	1616R/L17	16x16	100	14.8	3	17		
	2020R/L10	20x20	125	18.8	3	10		
	2020R/L17	20x20	125	18.8	3	17		
	2525R/L10	25x25	150	23.8	3	10		
QEGD	2020R/L13	20x20	140	18.5	4	13	M6 × 20	S5
	2020R/L22	20x20	140	18.5	4	22		
	2525R/L13	25x25	150	23.5	4	13		
	2525R/L22	25x25	150	23.5	4	22		
	3232R/L13	32x32	170	30.5	4	13		
QEHD	2525R/L13	25x25	150	23	5	13	M6 × 20	S5
	2525R/L22	25x25	150	23	5	22		
QEHS	2525N30	25x25	150	12.5	5	30	M6 × 20	S5
	3232R/L13	32x32	170	30	5	13		
QEHD	3232R/L22	32x32	170	30	5	22	M6 × 20	S5
	3232R/L22	32x32	170	30	5	22		
QEHS	3232N30	32x32	170	16	5	30	M6 × 20	S5
	2525R/L13	25x25	150	22.6	6	13		
QEKD	2525R/L22	25x25	150	22.6	6	22	M6 × 20	S5
	2525R/L22	25x25	150	22.6	6	22		
QEKS	2525N30	25x25	150	12.5	6	30	M6 × 20	S5
	3232R/L13	32x32	170	29.6	6	13		
QEKD	3232R/L22	32x32	170	29.6	6	22	M6 × 20	S5
	3232R/L22	32x32	170	29.6	6	22		
QEKS	3232N30	32x32	170	16	6	30	M6 × 20	S5




# End Face Grooving and Turning Holders

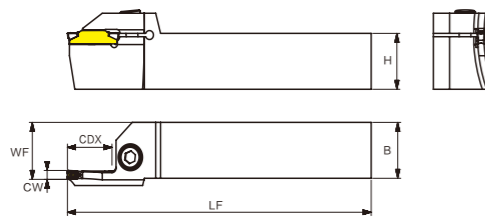


Type	Dimension							Adaptable Inserts	Screw	Wrench
	HxB	LF	WF	CW	CDX	φ D				
QFFD	2525RL10-48H	25x25	150	26	3	10	48-66	QTFD0303-MG	M6 × 20	S5
	2525RL17-48H	25x25	150	26	3	17	48-66	QTFD0303-MG		
	2525RL10-60H	25x25	150	26	3	10	60-80	QTFD0303-MG		
	2525RL17-60H	25x25	150	26	3	17	60-80	QTFD0303-MG		
	2525RL10-74H	25x25	150	26	3	10	74-110	QTFD0303-MG		
	2525RL17-74H	25x25	150	26	3	17	74-110	QTFD0303-MG		
	2525RL10-100H	25x25	150	26	3	10	100-150	QTFD0303-MG		
	2525RL17-100H	25x25	150	26	3	17	100-150	QTFD0303-MG		
QFGD	2525RL13-52H	25x25	150	26	4	13	52-72	QTGD0404-MG		
	2525RL22-52H	25x25	150	26	4	22	52-72	QTGD0404-MG		
	2525RL13-64H	25x25	150	26	4	13	64-100	QTGD0404-MG		
	2525RL22-64H	25x25	150	26	4	22	64-100	QTGD0404-MG		
	2525RL13-90H	25x25	150	26	4	13	90-140	QTGD0404-MG		
	2525RL22-90H	25x25	150	26	4	22	90-140	QTGD0404-MG		
	2525RL13-130H	25x25	150	26	4	13	130-230	QTGD0404-MG		
	2525RL22-130H	25x25	150	26	4	22	130-230	QTHD0404-MG		
QFHD	2525RL13-58H	25x25	150	26	5	13	58-96	QTHD0404-MG		
	2525RL22-58H	25x25	150	26	5	22	58-96	QTHD0404-MG		
	2525RL13-86H	25x25	150	26	5	13	86-140	QTHD0404-MG		
	2525RL22-86H	25x25	150	26	5	22	86-140	QTHD0404-MG		
	2525RL13-130H	25x25	150	26	5	13	130-200	QTHD0404-MG		
	2525RL22-130H	25x25	150	26	5	22	130-200	QTHD0404-MG		
	2525RL13-185H	25x25	150	26	5	13	185-400	QTHD0404-MG		
	2525RL22-185H	25x25	150	26	5	22	185-400	QTHD0404-MG		
QFKD	2525RL30-185H	25x25	150	26	6	30	185-400	QTKD0608-MG		
	2525RL13-60H	25x25	150	26	6	13	60-100	QTKD0608-MG		
	2525RL22-60H	25x25	150	26	6	22	60-100	QTKD0608-MG		
	2525RL13-88H	25x25	150	26	6	13	88-180	QTKD0608-MG		
	2525RL22-88H	25x25	150	26	6	22	88-180	QTKD0608-MG		
	2525RL13-160H	25x25	150	26	6	13	160-400	QTKD0608-MG		
	2525RL22-160H	25x25	150	26	6	22	160-400	QTKD0608-MG		
	2525RL30-160H	25x25	150	26	6	30	160-400	QTKD0608-MG		




# End Face Grooving and Turning Holders

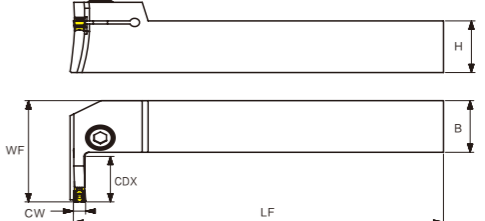


Type	Dimension							Adaptable Inserts	Screw	Wrench
	HxB	LF	WF	CW	CDX	φ D				
QFFD	2525RL10-48L	25x25	150	36.5	3	10	48-66	QTFD0303-MG	M6 × 20	S5
	2525RL17-48L	25x25	150	43.5	3	17	48-66	QTFD0303-MG		
	2525RL10-60L	25x25	150	36.5	3	10	60-80	QTFD0303-MG		
	2525RL17-60L	25x25	150	43.5	3	17	60-80	QTFD0303-MG		
	2525RL10-74L	25x25	150	36.5	3	10	74-110	QTFD0303-MG		
	2525RL17-74L	25x25	150	43.5	3	17	74-110	QTFD0303-MG		
	2525RL10-100L	25x25	150	36.5	3	10	100-150	QTFD0303-MG		
	2525RL17-100L	25x25	150	43.5	3	17	100-150	QTFD0303-MG		
QFGD	2525RL13-52L	25x25	150	39.5	4	13	52-72	QTGD0404-MG		
	2525RL22-52L	25x25	150	48.5	4	22	52-72	QTGD0404-MG		
	2525RL13-64L	25x25	150	39.5	4	13	64-100	QTGD0404-MG		
	2525RL22-64L	25x25	150	48.5	4	22	64-100	QTGD0404-MG		
	2525RL13-90L	25x25	150	39.5	4	13	90-140	QTGD0404-MG		
	2525RL22-90L	25x25	150	48.5	4	22	90-140	QTGD0404-MG		
	2525RL13-130L	25x25	150	39.5	4	13	130-230	QTGD0404-MG		
	2525RL22-130L	25x25	150	48.5	4	22	130-230	QTHD0404-MG		
QFHD	2525RL13-58L	25x25	150	39.5	5	13	58-96	QTHD0504-MG		
	2525RL22-58L	25x25	150	48.5	5	22	58-96	QTHD0504-MG		
	2525RL13-86L	25x25	150	39.5	5	13	86-140	QTHD0504-MG		
	2525RL22-86L	25x25	150	48.5	5	22	86-140	QTHD0504-MG		
	2525RL13-130L	25x25	150	39.5	5	13	130-200	QTHD0504-MG		
	2525RL22-130L	25x25	150	48.5	5	22	130-200	QTHD0504-MG		
	2525RL13-185L	25x25	150	39.5	5	13	185-400	QTHD0504-MG		
	2525RL22-185L	25x25	150	48.5	5	22	185-400	QTHD0504-MG		
QFKD	2525RL30-185L	25x25	150	56.5	6	30	185-400	QTKD0608-MG		
	2525RL13-60L	25x25	150	39.5	6	13	60-100	QTKD0608-MG		
	2525RL22-60L	25x25	150	48.5	6	22	60-100	QTKD0608-MG		
	2525RL13-88L	25x25	150	39.5	6	13	88-180	QTKD0608-MG		
	2525RL22-88L	25x25	150	48.5	6	22	88-180	QTKD0608-MG		
	2525RL13-160L	25x25	150	39.5	6	13	160-400	QTKD0608-MG		
	2525RL22-160L	25x25	150	48.5	6	22	160-400	QTKD0608-MG		
	2525RL30-160L	25x25	150	56.5	6	30	160-400	QTKD0608-MG		




# ZQ

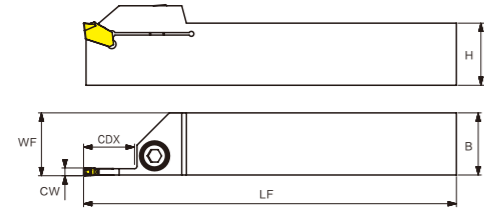

Type	Dimension							Adaptable Inserts	Screw	Wrench
	H	B	LF	WF	CW	CDX				
ZQ1616R03	16	16	100	16.4	3	16	ZQMX3N11-1E	M5 × 17	S4	
ZQ1616R04	16	16	100	16.4	4	18				ZQMX4N11-1E
ZQ2020R03	20	20	125	20.4	3	20	ZQMX3N11-1E	M6 × 20	S5	
ZQ2020R04	20	20	125	20.4	4	20	ZQMX4N11-1E			
ZQ2525R03	25	25	150	25.4	3	20	ZQMX3N11-1E			
ZQ2525R04	25	25	150	25.4	4	20	ZQMX4N11-1E			
ZQ2525R05	25	25	150	25.4	5	25	ZQMX5N11-1E			
ZQ2525R06	25	25	150	25.7	6	32	ZQMX6N11-1E			
ZQ3225R03	32	25	170	25.4	3	25	ZQMX3N11-1E	M6 × 22	S5	
ZQ3225R04	32	25	170	25.4	4	25	ZQMX4N11-1E			
ZQ3225R05	32	25	170	25.4	5	25	ZQMX5N11-1E			
ZQ3225R06	32	25	170	25.7	6	32	ZQMX6N11-1E			
ZQ1616L03	16	16	100	16.4	3	16	ZQMX3N11-1E	M5 × 17	S4	
ZQ1616L04	16	16	100	16.4	4	16	ZQMX4N11-1E			
ZQ2020L03	20	20	125	20.4	3	20	ZQMX3N11-1E	M6 × 20	S5	
ZQ2020L04	20	20	125	20.4	4	20	ZQMX4N11-1E			
ZQ2525L03	25	25	150	25.4	3	20	ZQMX3N11-1E			
ZQ2525L04	25	25	150	25.4	4	20	ZQMX4N11-1E			
ZQ2525L05	25	25	150	25.4	5	25	ZQMX5N11-1E			
ZQ2525L06	25	25	150	25.7	6	32	ZQMX6N11-1E			
ZQ3225L03	32	25	170	25.4	3	25	ZQMX3N11-1E	M6 × 22	S5	
ZQ3225L04	32	25	170	25.4	4	25	ZQMX4N11-1E			
ZQ3225L05	32	25	170	25.4	5	25	ZQMX5N11-1E			
ZQ3225L06	32	25	170	25.7	6	32	ZQMX6N11-1E			




# External Parting Blade

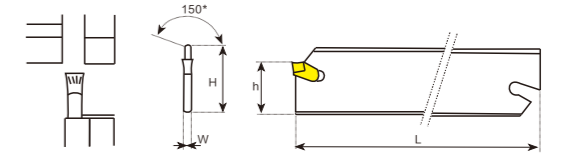


Type	Dimension				Adaptable Inserts	
	H	W	L	h		
	SPB326-S	26	2.4	110	21	ZQMX3N11-1E
	SPB426-S	26	3.2	110	21	ZQMX4N11-1E
	SPB526-S	26	4.0	110	21	ZQMX5N11-1E
	SPB626-S	26	5.2	110	21	ZQMX6N11-1E
	SPB332-S	32	2.4	150	25	ZQMX3N11-1E
	SPB432-S	32	3.2	150	25	ZQMX4N11-1E
	SPB532-S	32	4.0	150	25	ZQMX5N11-1E
	SPB632-S	32	5.2	150	25	ZQMX6N11-1E

# External Threading Turning Tool

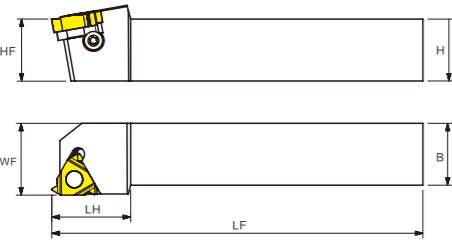


Type	Dimension					Adaptable Inserts	Inserts Screw	Shim	Shim Screw	Wrench	
	H	HF	B	LF	WF						
	SWR/L1010H11	10	10	10	100	16	R/LT11□□G-□□	L60 M2.5 × 6	—	—	T08
	SWR/L1212H11	12	12	12	100	16					
	SWR/L1616H16	16	16	16	100	20	R/LT16□□G-□□	L60 M3.5 × 12	TT16-□□	SS04008	T15 S2.5
	SWR/L2020K16	20	20	20	125	25					
	SWR/L2525M16	25	25	25	150	32					
	SWR/L3225P16	32	32	25	170	32					
	SWR/L3232P16	32	32	32	170	40					
	SWR/L2525M22	25	25	25	150	32					
	SWR/L2525P22	32	32	25	170	32					
	SWR/L3232P22	32	32	32	170	40					
	SWR/4040S22	40	40	40	250	50					
	SWR/L3232P22	32	32	32	170	40	R/LT27□□G-□□	L60 M6 × 16	TT27-□□		
	SWR/L4040S27	40	40	40	250	50					

# External Threading Turning Tool



Type	Dimension							Adaptable Inserts	Screw	Shim	Shim Screw	Wrench
	DMIN	DCON	H	LF	WF	LRED						
	SNR/L0010K11	10	12	9.5	125	6	32	R/LT11□□L-□□	L60 M2.5 × 5			T08
	SNR/L0012K11	12	16	11.5	125	6	32					
	SNR/L0013M16	13	16	15.5	150	10	32	R/LT16□□L-□□	L60 M3.5 × 8	TT16	SS04008	T15 S2.5
	SNR/L0016M16	16	20	15.5	150	12	40					
	SNR/L0020Q16	20	25	19.5	180	14	40					
	SNR/L0025R16	25	30	24	200	16	45					
	SNR/L32S16	32	38	30	250	20	55					
	SNR/L0025R22	25	30	24	200	18	45					
	SNR/L0032S22	32	38	30	250	22	55					
	SNR/L0040T22	40	46	38	300	26	60					
	SNR/L0032S27	32	40	30	250	24	55	R/LT27□□L-□□	L60 M6 × 16	TT27		
	SNR/L0040T27	40	50	38	300	30	60					

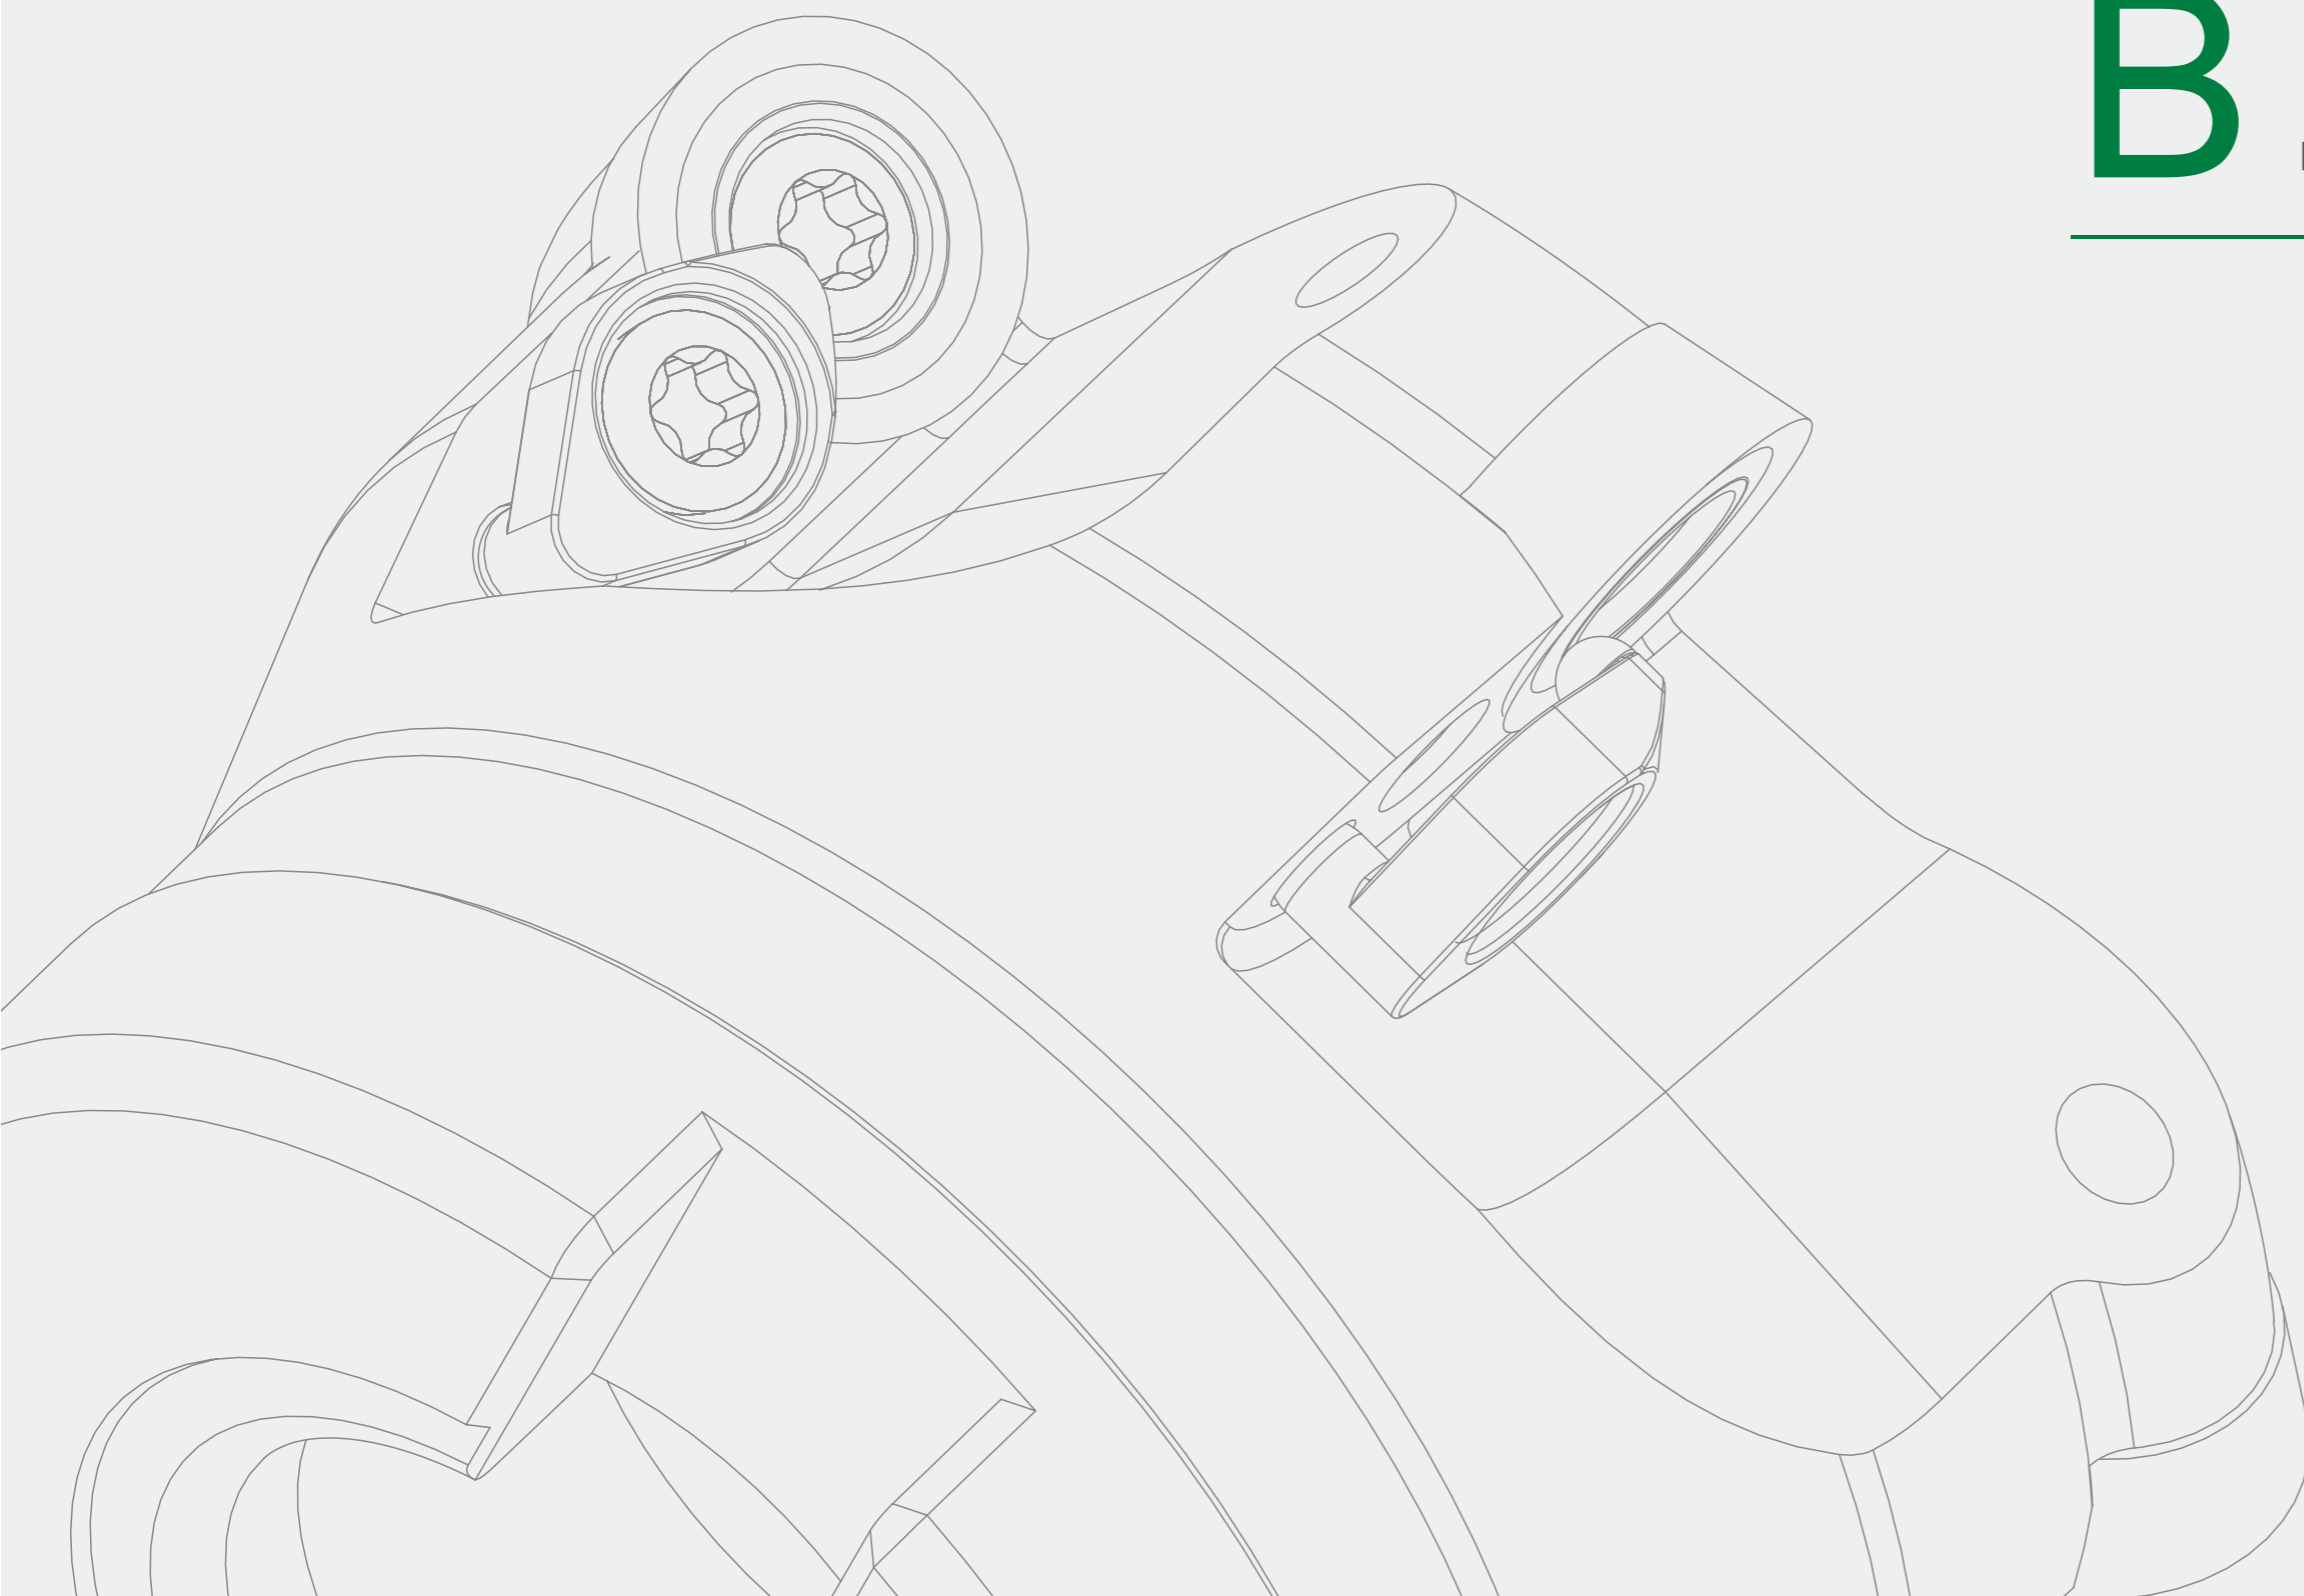

# B

Milling Tools

143-200

---

# Milling Insert Naming Rule

## Shape

T P K N 22 04 ED T32 R OPM

<b>A</b> 	<b>B</b> 	<b>C</b> 
<b>D</b> 	<b>E</b> 	<b>H</b> 
<b>K</b> 	<b>L</b> 	<b>M</b> 
<b>O</b> 	<b>P</b> 	<b>R</b> 
<b>S</b> 	<b>T</b> 	<b>T</b> 
<b>V</b> 	<b>W</b> 	<b>Z</b> 

## Chip Breaker and Hole

T P K N 22 04 ED T32 R OPM

Symbol	Center Hole	Chip Breaker	Insert Profile	Symbol	Center Hole	Chip Breaker	Insert Profile
<b>B</b>	Y	N		<b>N</b>	N	N	
<b>H</b>	Y	S		<b>R</b>	N	S	
<b>C</b>	Y	N		<b>F</b>	N	D	
<b>J</b>	Y	D		<b>A</b>	Y	N	
<b>W</b>	Y	N		<b>M</b>	Y	S	
<b>T</b>	Y	S		<b>G</b>	Y	D	
<b>Q</b>	Y	N		<b>X</b>			
<b>U</b>	Y	D					

## Clearance Angle

T P K N 22 04 ED T32 R OPM

<b>A</b> 	<b>B</b> 
<b>C</b> 	<b>D</b> 
<b>E</b> 	<b>F</b> 
<b>G</b> 	<b>N</b> 
<b>P</b> 	Others

## Tolerance

T P K N 22 04 ED T32 R OPM

Symbol	m(mm)	d=l.C.(mm)	s(mm)	(reference)M grade tolerance detail(according to shape, size.) Tolerance of insert nose height						
				Inscribed Circle	Regular Triangle	Square	80° Rhombus	55° Rhombus	35° Rhombus	Round
<b>A</b>	±0.005	±0.025	±0.025	6.35	±0.08	±0.08	±0.08	±0.11	±0.16	...
<b>F</b>	±0.005	±0.013	±0.025	9.525	±0.08	±0.08	±0.08	±0.11	±0.16	...
<b>C</b>	±0.013	±0.025	±0.025	12.7	±0.13	±0.13	±0.13	±0.15	...	...
<b>H</b>	±0.013	±0.013	±0.013	15.875	±0.15	±0.15	±0.15	±0.18	...	...
<b>E</b>	±0.013	±0.013	±0.013	19.05	±0.15	±0.15	±0.15	±0.18	...	...
<b>G</b>	±0.025	±0.025	±0.025	25.4	...	±0.18	...	...	...	...
<b>J</b>	±0.005	±0.05-±0.13	±0.025	●Tolerance of Inscribed Circle						
<b>K</b>	±0.013	±0.05-±0.13	±0.025	Inscribed Circle	Regular Triangle	Square	80° Rhombus	55° Rhombus	35° Rhombus	Round
<b>L</b>	±0.025	±0.05-±0.13	±0.025	6.35	±0.05	±0.05	±0.05	±0.05	±0.05	
<b>M</b>	±0.08-±0.18	±0.05-±0.13	±0.13	9.525	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
<b>N</b>	±0.08-±0.18	±0.05-±0.13	±0.025	12.7	±0.08	±0.08	±0.08	±0.08	...	±0.08
<b>U</b>	±0.13-±0.38	±0.08-±0.25	±0.1	15.875	±0.1	±0.1	±0.1	±0.1	...	±0.1
				19.05	±0.1	±0.1	±0.1	±0.1	...	0.1
				25.4	...	±0.13	±0.13	...	...	±0.13

# Milling Insert Naming Rule

## Cutting Edge Length

T P K N 22 04 ED T32 R OPM

Inscribed Circle diameter(mm)	Insert Shape							
	C	D	R	S	T	V	W	K
3.97					06			
5			05					
5.56					09			
6			06					
6.35	06	07			11	11		
8			08					
9.525	09	11	09	09	16	16	06	16
10			10					
12			12					
12.7	12	15	12	12	22	22	08	
15.875	16		15	15	27			
16			19	16				
19.05	19		19	19	33			
20			20					
25	25	25	25					
25.4			25	25				
31.75			31					
32			32					

## Thickness

T P K N 22 04 ED T32 R OPM

Symbol	Thickness(mm)
<b>00</b>	0.79
<b>T0</b>	0.99
<b>01</b>	1.59
<b>T1</b>	1.98
<b>02</b>	2.38
<b>T2</b>	2.58
<b>03</b>	3.18
<b>T3</b>	3.97
<b>04</b>	4.76
<b>T4</b>	4.96
<b>05</b>	5.56
<b>T5</b>	5.95
<b>06</b>	6.35
<b>T6</b>	6.75
<b>07</b>	7.94
<b>09</b>	9.52
<b>T9</b>	9.72
<b>11</b>	11.11
<b>12</b>	12.7



## Wiper Land and Clearance Angle

T P K N 22 04 ED T32 R OPM

Symbol	Clearance Angle	Symbol	Clearance Angle
<b>A</b>	45°	<b>A</b>	3°
<b>D</b>	60°	<b>B</b>	5°
<b>E</b>	75°	<b>C</b>	7°
<b>F</b>	85°	<b>D</b>	15°
<b>P</b>	90°	<b>E</b>	20°
<b>Z</b>	其它	<b>F</b>	25°
		<b>G</b>	30°
		<b>N</b>	0°
		<b>P</b>	11°
		<b>Z</b>	其它

## Cutting Edge Preparation(mm)

T P K N 22 04 ED T32 R OPM

Symbol	Preparation 1	Preparation 2	Preparation 3	Preparation 4	Preparation 5	Preparation 6	Preparation 7	Symbol	
<b>F</b>								<b>K</b>	
<b>E</b>	0	5°	0	0.1	1	10°	1	0.15	<b>P</b>
<b>T</b>	2	15°	2	0.2	3	20°	3	0.25	<b>W</b>
<b>S</b>	4	25°	4	0.3	5	30°	5	0.35	
	6		6	0.4	7		7	0.45	

## Cutting Direction

T P K N 22 04 ED T32 R OPM

Symbol	Direction
<b>R</b>	Right
<b>L</b>	Left
<b>N</b>	Neutral

## Chip Breaker Code

T P K N 22 04 ED T32 R OPM

Code	Code
<b>OPF</b>	<b>OPM</b>
<b>OPR</b>	

## Milling Tools Naming Rule




### Type of Tools

FM 45 2 A22 63 5 SN13 L

FM	LM	SM	HM	RM	CM
Face milling Quare-shoulder milling	Indexable Helical Milling Tool	Slot milling	High feed	Profiling tool	Chamfer milling

### Lead Angle

FM 45 2 A22 63 5 SN13 L

45°	75°	90°
		

### Differentiate Code

FM 45 2 A22 63 5 SN13 L

### Cutting Tool Diameter

FM 45 2 A22 63 5 SN13 L

## Milling Tools Naming Rule

### Adaptor Type

FM 45 2 A22 63 5 SN13 L

A	B	C	D	P	W	MT
A interface	B interface	C interface	D interface	Cylindrical shank	Lateral solid	Morse taper shank

### Teeth Number

FM 45 2 A22 63 5 SN13 L





### Type

FM 45 2 A22 63 5 SN13 L

### Cutting Direction : Right/Left

FM 45 2 A22 63 5 SN13 L

### Shell Structure

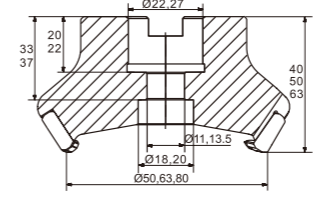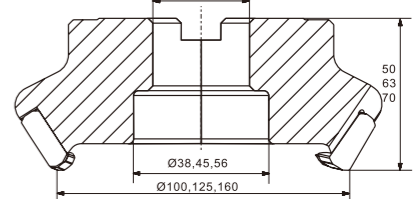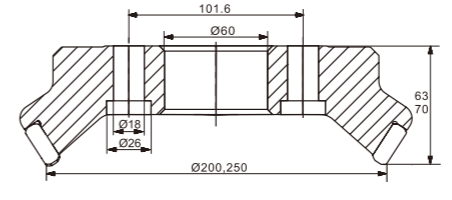
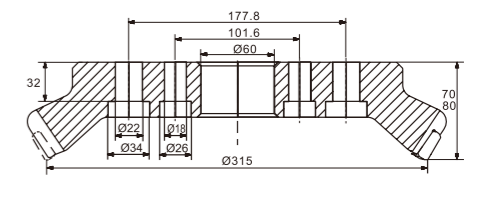
Type of Adapter		Type of Adapter	
	GB5342-96 of $\phi 50-\phi 80$ shell Facmilling Cutter		GB5342-96 of $\phi 100-\phi 160$ shell Facmilling Cutter
Type of Adapter		Type of Adapter	
	GB5342-96 of $\phi 50-\phi 80$ shell Facmilling Cutter		GB5342-96 of $\phi 315$ Facmilling Cutter

## Grade introduction









Coating	Brand	P	M	K	N	S	H
CVD	OC3220			»			
	OP2202	=		=			
PVD	OP1315	»	»	»			
	OP1325	»	»	»			
	OP1030	»		»			
	OP1630	»					
	OP1340	#	#				
Uncoated	OK434				»		

= stable cutting condition » normal cutting condition # bad cutting condition







## Chipbreaker introduction

chipbreaker	structure schematic	application scenarios
OM		strength cutting edge design, good anti-impact resistance, highly optimized for general use.
OL		sharp cutting edge design, provide smooth cutting, suitable for steady cutting condition.


## Indexable milling insert list

Type	Tool Shape	Approach angle La MAX	Diameter	Adaptable Inserts	Insert Shape
Face Milling	FM451 	KAPR=45° APMX=5.9	Ø50-Ø200	SEKT12T3* SEET12T3*	
	FM454 	KAPR=45° APMX=4.3	Ø50-Ø200	ODMT0605*	
	FM452 	KAPR=45° APMX=6.5	Ø50-Ø250	SNMX1306A*	
	FM752 	KAPR=75° APMX=10.0	Ø50-Ø200	SNMX1306E*	







## Indexable milling insert list

Type	Tool Shape	Approach angle La MAX	Diameter	Adaptable Inserts	Insert Shape
Face Milling	FM882 	KAPR=88° APMX=11.0	Ø50-Ø200	SNMX1306Z*	
	FM453 	KAPR=45° APMX=5.5	Ø50-Ø200	ONMU0504* ONMU0705* ONMU0906*	
	FM497 	KAPR=49° APMX=6.5	Ø80-Ø315	XN*U0906*	
Square Shoulder Milling	FM901 	KAPR=90° APMX=15.0	Ø16-Ø80	APMT1135* APMT1604*	

## Indexable milling insert list

Type	Tool Shape	Approach angle La MAX	Diameter	Adaptable Inserts	Insert Shape
Square Shoulder Milling	FM901F 	KAPR=90°  APMX=10.0	Ø16-Ø35	BXKT11T3*	
	FM902 	KAPR=90°  APMX=13.0	Ø50-Ø200	TNGX1306*	
	FM903 	KAPR=90°  APMX=8.0	Ø20-Ø200	WNMX0403* WNMX0806*	





## Indexable milling insert list

Type	Tool Shape	Approach angle La MAX	Diameter	Adaptable Inserts	Insert Shape
Square Shoulder Milling	FM904 	KAPR=90°  APMX=12.4	Ø20-Ø80	LNGX1306*	
	FM905 	KAPR=90°  APMX=10.7	Ø40-Ø200	SDKT13T3*	
Square Shoulder Milling	RM01 	APMX=6	Ø25-Ø100	RPMW1003* RPKT1204*	

## Indexable milling insert list



Type	Tool Shape	Approach angle La MAX	Diameter	Adaptable Inserts	Insert Shape
High feed milling	HML 	APMX=1.3	Ø16-Ø80	LNMX10* LNMX13*	
	HM192 	KAPR=19° APMX=1.9	Ø50-Ø125	PDMT1305*	

## Indexable milling insert list



Type	Tool Shape	Cutting width range	Diameter	Adaptable Inserts	Insert Shape
slot milling	SM01 	W=4-10	Ø80-Ø250	LNHT*	
	SM02 	W=10-22	Ø80-Ø160	LNHT*	

# Face milling FM451 series

KAPR=45°

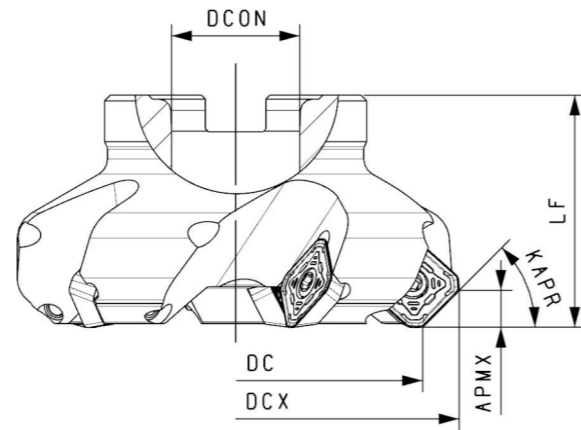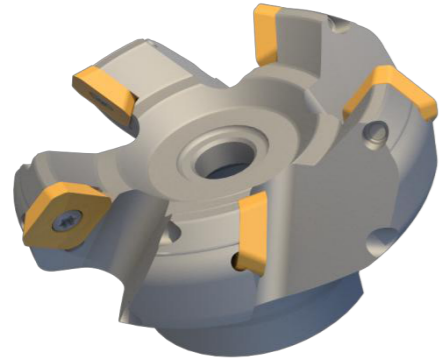

# FM451 milling insert

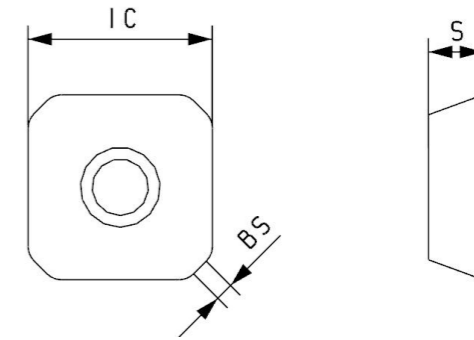

Type	stock	Number of flutes	Dimension					Interface	Adaptable Inserts	Screw	Wrench	
			DC	DCX	DCON	LF	LH					APMX
FM451-A22-50-3-SE12	●	3	50	63.7	22	40		5.9	A	SE*12T3*	SA03512	T15P
FM451-A22-50-4-SE12	●	4	50	63.7	22	40		5.9	A			
FM451-A22-63-4-SE12	●	4	63	76.7	22	40		5.9	A			
FM451-A22-63-5-SE12	●	5	63	76.7	22	40		5.9	A			
FM451-A27-80-4-SE12	●	4	80	93.7	27	50		5.9	A			
FM451-A27-80-6-SE12	●	6	80	93.7	27	50		5.9	A			
FM451-B32-100-5-SE12	●	5	100	113.7	32	50		5.9	B			
FM451-B32-100-7-SE12	●	7	100	113.7	32	50		5.9	B			
FM451-B40-125-6-SE12	●	6	125	138.7	40	63		5.9	B			
FM451-B40-125-8-SE12	●	8	125	138.7	40	63		5.9	B			
FM451-C40-160-10-SE12	○	10	160	173.7	40	63		5.9	C			
FM451-C60-200-12-SE12	○	12	200	213.7	60	63		5.9	C			

● Stock available ○ Make-to-order



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Unicoon OK434
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P										=	>>	>>	>>	>>	#	
M											>>	>>			#	
K									>>	=	>>	>>	>>			
N																>>
S																
H																
SEET12T3-QPF	13.4			3.97			1.3					○				
SEET12T3-QPM	13.4			3.97			1.3			○	○		○			
SEET12T3-QPR	13.4			3.97			1.3			○	○					
SEKT12T3-OM	13.4			3.97			1.3			○		●				



● Stock available ○ Make-to-order

# Face milling FM454 series

KAPR=45°

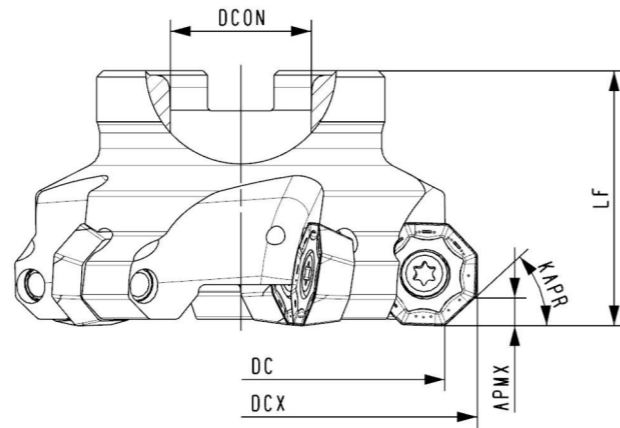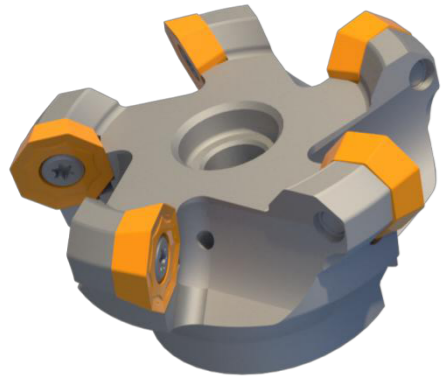

# FM454 milling insert

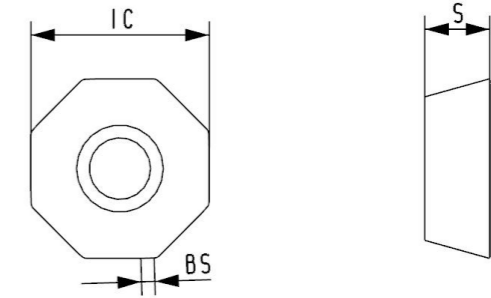

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM454-A22-50-4-OD06-C	●	4	50	60.4	22	40		4.3	A	OD*0605ADR*	SA0512	T20P
FM454-A22-63-5-OD06-C	●	5	63	73.4	22	40		4.3	A			
FM454-A27-80-6-OD06-C	●	6	80	90.4	27	50		4.3	A			
FM454-B32-100-7-OD06	●	7	100	110.4	32	50		4.3	B			
FM454-B40-125-8-OD06	●	8	125	135.4	40	63		4.3	B			
FM454-C40-160-10-OD06	○	10	160	170.4	40	63		4.3	C			
FM454-C60-200-12-OD06	○	12	200	210.4	60	63		4.3	C			

● Stock available ○ Make-to-order



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Un pe ro su n
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P									=	>>	>>	>>	>>	>>	#	
M										>>	>>				#	
K									>>	=	>>	>>	>>			
N																>>
S																
H																
ODMT0605ADR-OM	16.2			5.9				1.2		O		●				



● Stock available ○ Make-to-order

# Face milling FM452 series

KAPR=45°

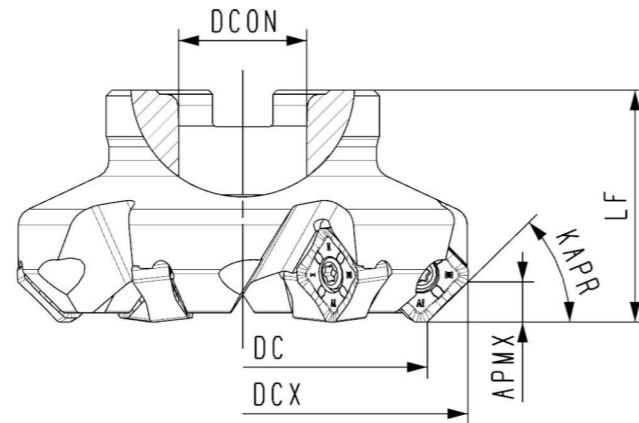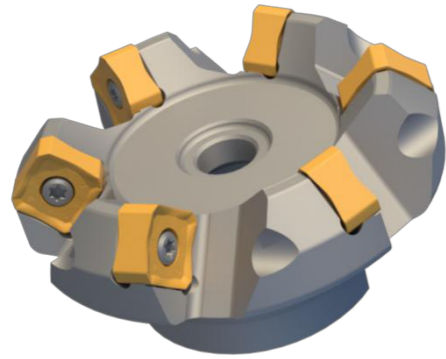

# FM452 milling insert

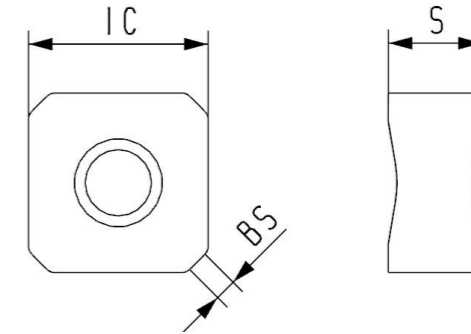

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM452-A22-50-5-SN13	●	5	50	64.6	22	40		6.5	A	SN*1306ANN*	SA0411	T15P
FM452-A22-63-4-SN13	●	4	63	77.6	22	40		6.5	A			
FM452-A22-63-6-SN13	●	6	63	77.6	22	40		6.5	A			
FM452-A27-80-5-SN13	●	5	80	94.6	27	50		6.5	A			
FM452-A27-80-7-SN13	●	7	80	94.6	27	50		6.5	A			
FM452-B32-100-6-SN13	●	6	100	114.6	32	50		6.5	B			
FM452-B32-100-8-SN13	●	8	100	114.6	32	50		6.5	B			
FM452-B40-125-8-SN13	●	8	125	139.6	40	63		6.5	B			
FM452-B40-125-10-SN13	●	10	125	139.6	40	63		6.5	B			
FM452-C40-160-12-SN13	●	12	160	174.6	40	63		6.5	C			
FM452-C60-200-16-SN13	●	16	200	214.6	60	63		6.5	C			
FM452-C60-250-20-SN13		20	250	264.6	60	63		6.5	C			
FM452-D60-315-24-SN13	○	24	315	329.6	60	70		6.5	D			

● Stock available ○ Make-to-order


= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								OC3220	OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	OK434
	P	M	K	N	S	H	C	V								
P	=	>>	>>	>>	>>	>>										#
M		>>	>>													#
K	>>	=	>>	>>	>>											
N																>>
S																
H																
Type	IC	L	W1	S	D1	RE	BS	OC3220	OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	OK434	
SNMX1306ANN-OL	13			6.8			1.6				●				○	
SNMX1306ANN-OM	13			6.8			1.6		●		●					
SNGX1306ANN-LM	13			6.8			1.6		○		○					

● Stock available ○ Make-to-order

# Face milling Tool— FM497 series


KAPR=49°

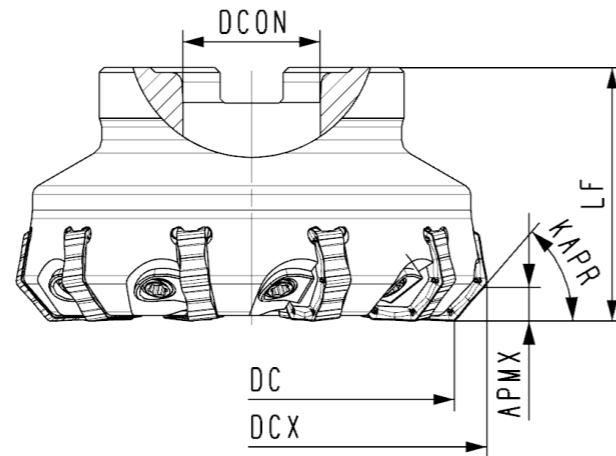

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM497-A27-80-8-XN09	●	8	80	92.7	27	50		6.5	A	XN*0906*	螺钉: SM0625 压板: WA-M6	T30100
FM497-B32-100-10-XN09	●	10	100	112.7	32	50		6.5	B			
FM497-B40-125-14-XN09	●	14	125	137.7	40	63		6.5	B			
FM497-C40-160-16-XN09	●	16	160	172.7	40	63		6.5	C			
FM497-C60-200-20-XN09	●	20	200	212.7	60	63		6.5	C			
FM497-C60-250-24-XN09	○	24	250	262.7	60	63		6.5	C			
FM497-D60-315-28-XN09	○	28	315	327.7	60	80		6.5	D			
FM497-A27-80-10-XN09	●	10	80	92.7	27	50		6.5	A			
FM497-B32-100-14-XN09	●	14	100	112.7	32	50		6.5	B			
FM497-B40-125-18-XN09	●	18	125	137.7	40	63		6.5	B			
FM497-C40-160-22-XN09	●	22	160	172.7	40	63		6.5	C			
FM497-C60-200-28-XN09	●	28	200	212.7	60	63		6.5	C			
FM497-C60-250-36-XN09	○	36	250	262.7	60	63		6.5	C			
FM497-D60-315-44-XN09	○	44	315	327.7	60	80		6.5	D			

● Stock available ○ Make-to-order

# FM497 milling inserts

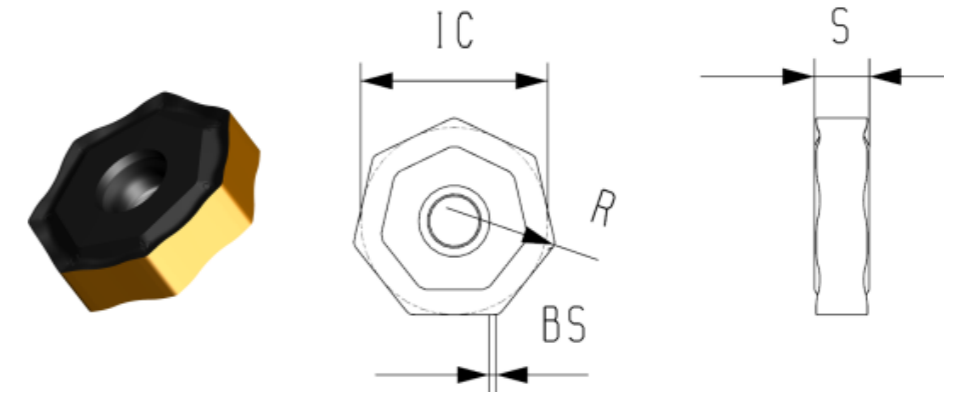



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Un pe re su u
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P									=	>>	>>	>>	>>			#
M										>>	>>					#
K									>>	=	>>	>>	>>			
N																>>
S																
H																
XNMU090612-KM	20.5			6.0		1.2		●								
XNMU0906ANN-KM	20.5			6.0		0.8	0.8	○								
XNMU0906ANN-KL	20.5			6.0		0.8	0.8	●								
XNGU0906ANN-KL	20.5			6.0		0.8	0.8	○								
XNGU090608-W	20.5			6.0		0.8	8			○						

● Stock available ○ Make-to-order

# Face milling FM752 series


KAPR=75°

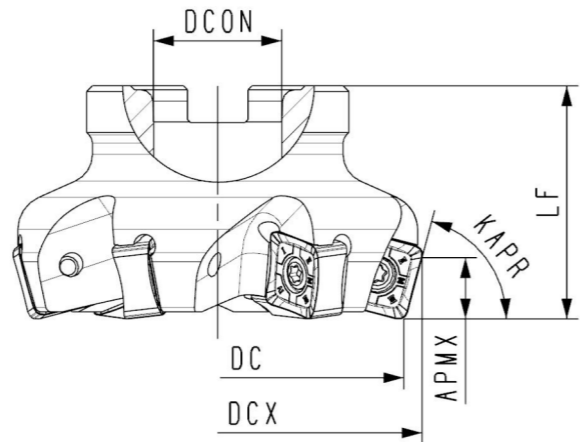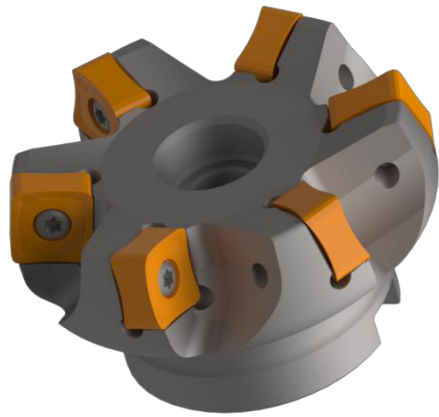

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM752-A22-50-5-SN13	●	5	50	57.2	22	40		10	A	SN*1306ENN*	SA0411	T15P
FM752-A22-63-6-SN13	●	6	63	87.2	22	40		10	A			
FM752-A27-80-7-SN13	●	7	80	87.2	27	50		10	A			
FM752-B32-100-8-SN13	●	8	100	114.6	32	50		10	B			
FM752-B40-125-10-SN13	●	10	125	139.6	40	63		10	B			
FM752-C40-160-12-SN13	○	12	160	174.6	40	63		10	C			
FM752-C60-200-16-SN13	○	16	200	214.6	60	63		10	C			

● Stock available ○ Make-to-order

# FM752 milling insert

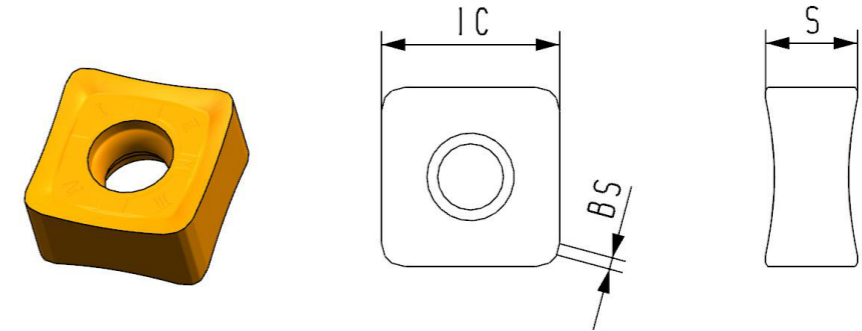



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D				Uncoated pejocour		
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030		OP1630	OP1340
P										=	>>	>>	>>	>>	#	
M											>>	>>			#	
K									>>	=	>>	>>	>>			
N																>>
S																
H																
SNMX1306ENN-OM	13			7			1		O		●					



● Stock available ○ Make-to-order

# Face milling FM882 series

KAPR=88°

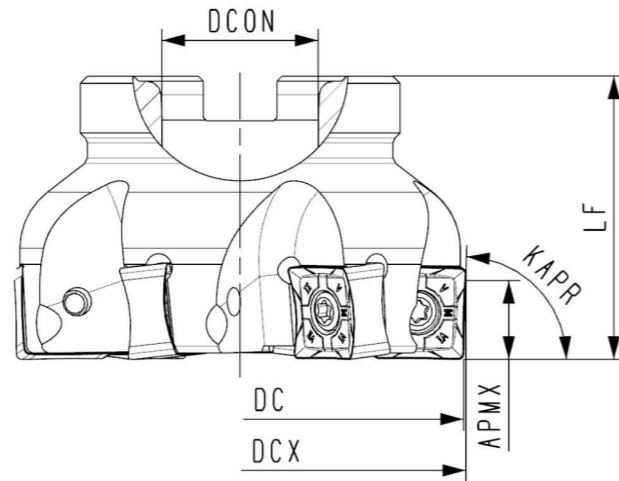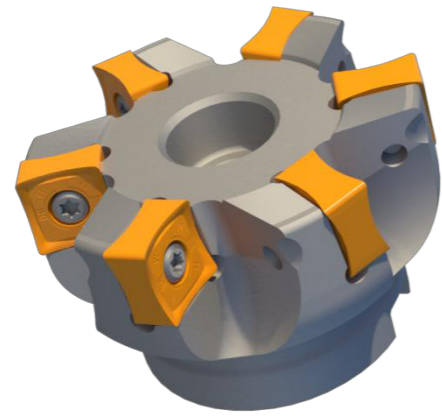

# FM882 milling insert

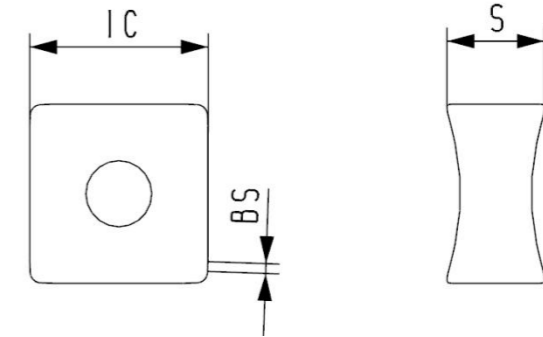

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM882-A22-50-5-SN13	●	5	50	50.6	22	40		11	A	SN*1306ZNN*	SA0411	T15P
FM882-A22-63-6-SN13	●	6	63	63.6	22	40		11	A			
FM882-A27-80-7-SN13	●	7	80	80.6	27	50		11	A			
FM882-B32-100-8-SN13	●	8	100	100.6	32	50		11	B			
FM882-B40-125-10-SN13	●	10	125	125.6	40	63		11	B			
FM882-C40-160-12-SN13	○	12	160	160.6	40	63		11	C			
FM882-C60-200-16-SN13	○	16	200	200.6	60	63		11	C			

● Stock available ○ Make-to-order



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D					Uncoated	
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630		OP1340
P									=	>>	>>	>>	>>			#
M										>>	>>					#
K									>>	=	>>	>>	>>			
N																>>
S																
H																
SNMX1306ZNN-OL	13			7		0.8	1				●					
SNMX1306ZNN-OM	13			7		0.8	1		●		●					



● Stock available ○ Make-to-order

# Face milling FM453 series

KAPR=45°

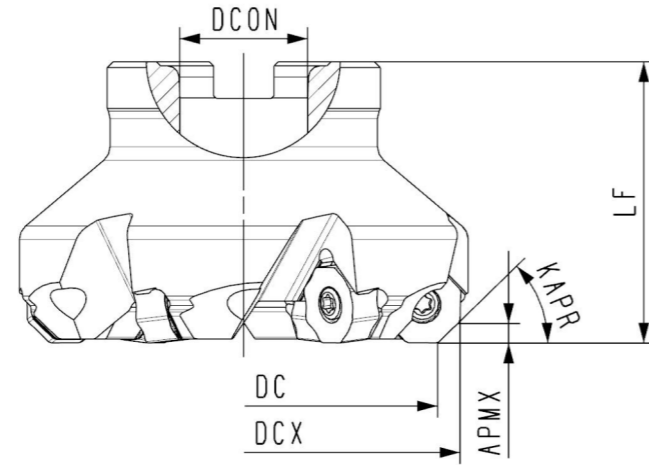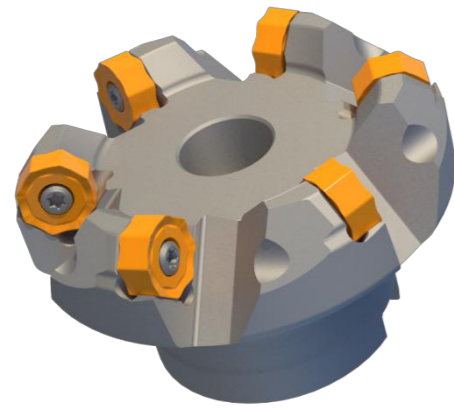

# FM453 milling insert

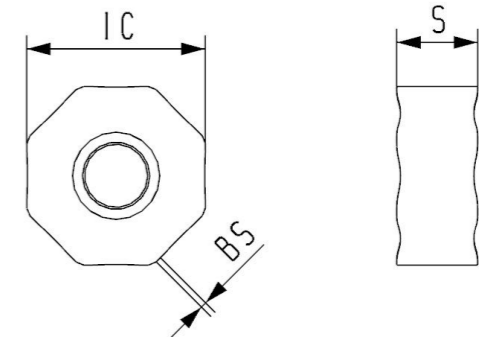

= stable cutting condition >> normal cutting condition # bad cutting condition

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM453-A22-50-5-ON05	●	5	53	64.6	22	48.4		3.2	A	ON*0504*	SA0411	T15P
FM453-A22-63-6-ON05	●	6	66	77.6	22	48.4		3.2	A			
FM453-A27-80-7-ON05	●	7	83	94.6	27	48.4		3.2	A			
FM453-B32-100-8-ON05	●	8	103	114.6	32	48.4		3.2	B			
FM453-B40-125-10-ON05	●	10	128	139.6	40	61.4		3.2	B			
FM453-C40-160-12-ON05	○	12	163	174.6	40	61.4		3.2	C			
FM453-C60-200-16-ON05	○	16	203	214.6	60	61.4		3.2	C			
FM453-A22-63-6-ON07	●	6	63	74.4	22	50		4.3	A	ON*0705*	SA0512	T20P
FM453-A27-80-7-ON07	●	7	80	91.4	27	50		4.3	A			
FM453-B32-100-8-ON07	●	8	100	111.4	32	50		4.3	B			
FM453-B40-125-10-ON07	●	10	125	136.4	40	63		4.3	B			
FM453-C40-160-12-ON07	○	12	160	171.4	40	63		4.3	C			
FM453-C60-200-16-ON07	○	16	200	211.4	60	63		4.3	C			
FM453-A22-63-5-ON09	●	5	63	76.2	22	50		5.5	A	ON*0906*	SA0512	T20P
FM453-A27-80-6-ON09	●	6	80	93.2	27	50		5.5	A			
FM453-B32-100-7-ON09	●	7	100	113.2	32	50		5.5	B			
FM453-B40-125-8-ON09	●	8	125	138.2	40	63		5.5	B			
FM453-C40-160-10-ON09	○	10	160	173.2	40	63		5.5	C			
FM453-C60-200-12-ON09	○	12	200	213.2	60	63		5.5	C			



● Stock available ○ Make-to-order

Material	Dimension								OC3220	OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	OK434
	IC	L	W1	S	D1	RE	BS	PVD								
P																#
M																#
K									>>	=	>>	>>	>>			
N																>>
S																
H																
Type	Dimension								OC3220	OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	OK434
	IC	L	W1	S	D1	RE	BS	PVD								
ONMU0504ANN-OL	13			5.9				0.8				●			○	
ONMU0504ANN-OM	13			5.9				0.4		●		●				
ONGU0504ANR-W	13			5.9				4.2				○				
ONMU070508-OM	17.5			6.3						○		●				
ONMU0906ANN-OL	20.5			7.2				1.2				●				
ONMU0906ANN-OM	20.5			7.2				1.2		○		●				

● Stock available ○ Make-to-order

## Square shoulder milling insert FM901 series

KAPR=90°

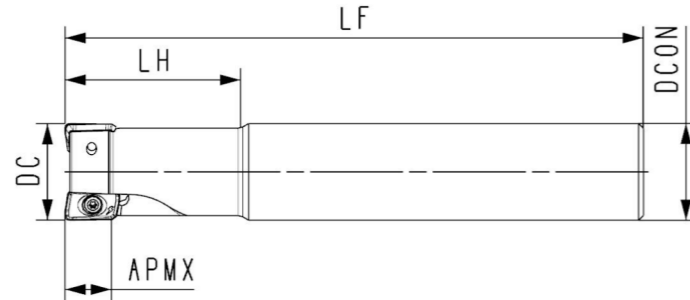
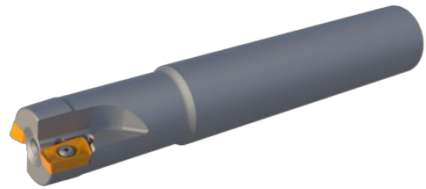


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM901-P16-16-2-AP11-120	●	2	16		16	120	35	10	P	AP*1135*	SA025065	T08P
FM901-P16-16-2-AP11-170	○	2	16		16	170	40	10	P			
FM901-P16-17-2-AP11-150	●	2	17		16	150	40	10	P			
FM901-P16-17-2-AP11-200	○	2	17		16	200	50	10	P			
FM901-P20-20-2-AP11-120	●	2	20		20	120	35	10	P			
FM901-P20-20-2-AP11-170	○	2	20		20	170	40	10	P			
FM901-P20-21-2-AP11-150	●	2	21		20	150	40	10	P			
FM901-P20-21-2-AP11-200	○	2	21		20	200	50	10	P			
FM901-P25-25-3-AP11-120	●	3	25		25	120	35	10	P			
FM901-P25-25-3-AP11-170	○	3	25		25	170	40	10	P			
FM901-P25-25-2-AP16-120	●	2	25		25	120	35	15	P	AP*1604*	SA0411	T15P
FM901-P25-25-2-AP16-170	○	2	25		25	170	40	15	P			
FM901-P25-26-2-AP16-160	●	2	26		25	160	40	15	P			
FM901-P25-26-2-AP16-200	○	2	26		25	200	50	15	P			
FM901-P32-32-3-AP16-160	●	3	32		32	160	40	15	P			
FM901-P32-32-3-AP16-200	○	3	32		32	200	50	15	P			
FM901-P32-40-4-AP16-160	●	4	40		32	160	40	15	P			
FM901-P32-40-4-AP16-200	○	4	40		32	200	50	15	P			

● Stock available ○ Make-to-order

## Square shoulder milling insert FM901 series


KAPR=90°

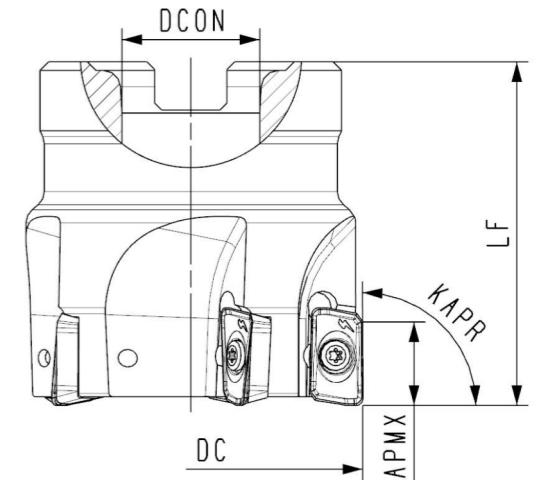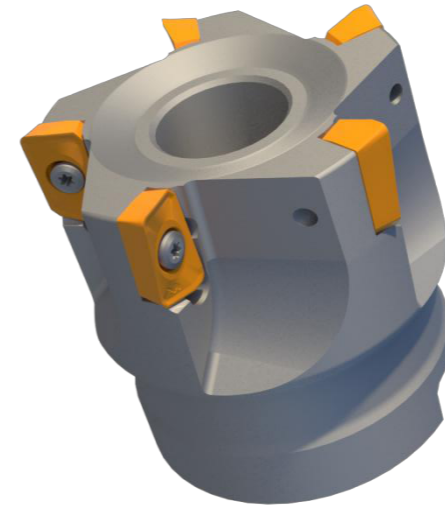

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM901-A16-40-5-AP11	○	5	40		16	50		10	A	AP*1135*	SA025065	T08P
FM901-A22-50-6-AP11	○	6	50		22	50		10	A			
FM901-A22-63-7-AP11	○	7	63		22	50		10	A			
FM901-A22-50-4-AP16	●	4	50		22	50		15	A	AP*1604*	SA0411	T15P
FM901-A22-63-5-AP16	●	5	63		22	50		15	A			
FM901-A27-80-6-AP16	○	6	80		27	50		15	A			

● Stock available ○ Make-to-order

# FM901 milling insert

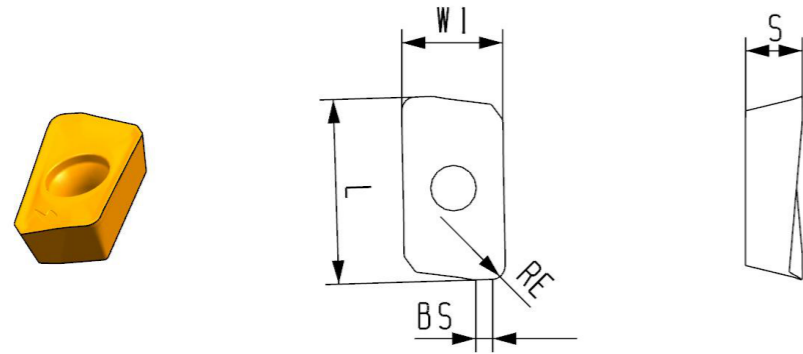


= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D					Uncoated paipocoun	
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630		OP1340
P																
M																
K																
N																
S																
H																
APMT1135PDER-SDX		11.4	6.22	3.5		0.8	1									
APMT1604PDER-SDX		17.4	9.27	4.8		0.8	1.5									

● Stock available ○ Make-to-order

# Square shoulder milling insert FM901 series

KAPR=90°

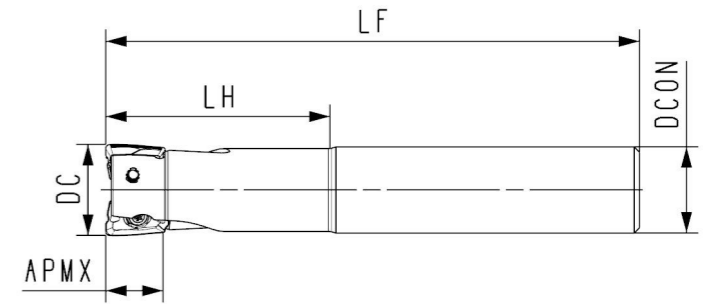


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM901F-P16-16-2-BX11-1 00	○	2	16		16	120	35	10	P	BX*11T3*	SA025065	T08P
FM901F-P16-17-2-BX11-150	●	2	17		16	150	40	10	P			
FM901F-P20-20-2-BX11-120	○	2	20		20	120	35	10	P			
FM901F-P20-21-2-BX11-200	●	2	21		20	170	40	10	P			
FM901F-P25-25-3-BX11-120	○	3	25		25	120	35	10	P			
FM901F-P25-26-3-BX11-200	●	3	26		25	170	40	10	P			

● Stock available ○ Make-to-order

# FM901F changeable head


KAPR=90°

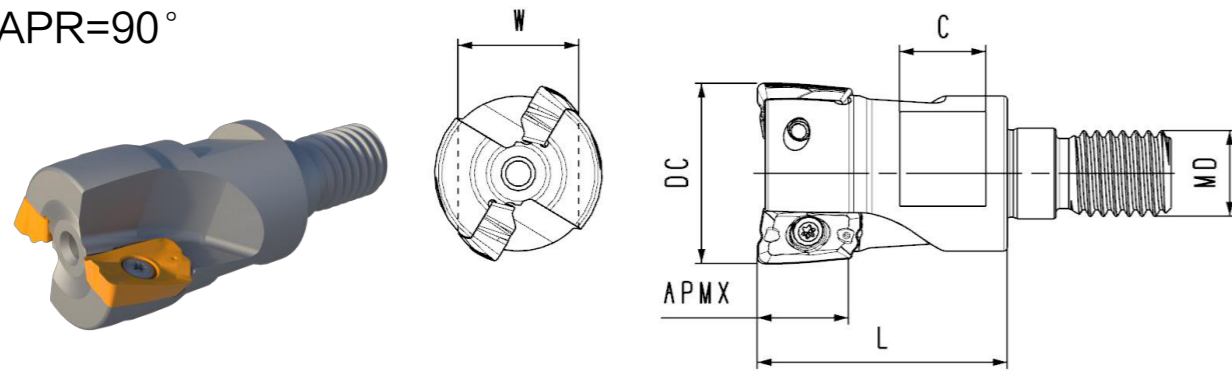

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	L	C	W	MD	APMX				
FM901F-M8-17-2-BX11	●	2	17	25	8	12	M8	10	BX*11T3*	SA025065	T08P	
FM901F-M10-21-2-BX11	●	2	21	29	10	14	M10	10				
FM901F-M10-21-3-BX11	●	3	21	29	10	14	M10	10				
FM901F-M12-26-3-BX11	●	3	26	37	12	17	M12	10				
FM901F-M12-26-4-BX11	●	4	26	37	12	17	M12	10				
FM901F-M16-35-5-BX11	●	5	35	40	12	22	M16	10				

● Stock available ○ Make-to-order

# FM901F milling insert

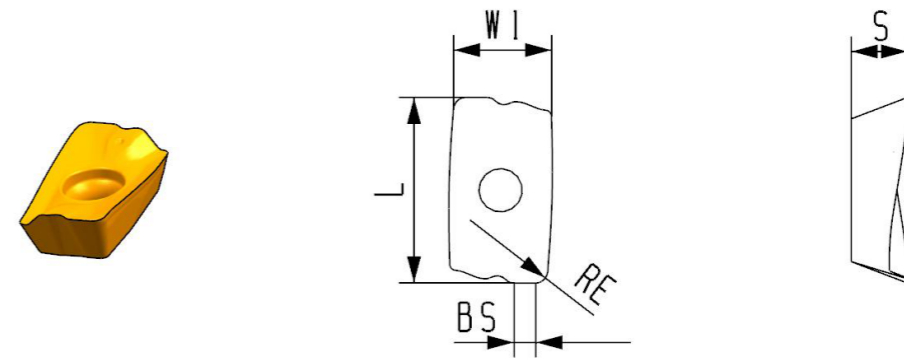



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Uncoated pejacoed
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P									=	>>	>>	>>	>>	>>	#	
M											>>	>>			#	
K									>>	=	>>	>>	>>			
N																>>
S																
H																
Type																
BXKT11T304PER-OM		12.2	6.8	3.7		0.4	1.8		○		●					
BXKT11T308PER-OM		12.2	6.8	3.7		0.8	1.4		○		●					
BXKT11T308PER-OL		12.2	6.8	3.7		0.8	1.4				●					
BXKT11T324PER-OM		12.2	6.8	3.7		2.4	0.8				○					

● Stock available ○ Make-to-order

# Square shoulder milling insert FM902 series


KAPR=90°

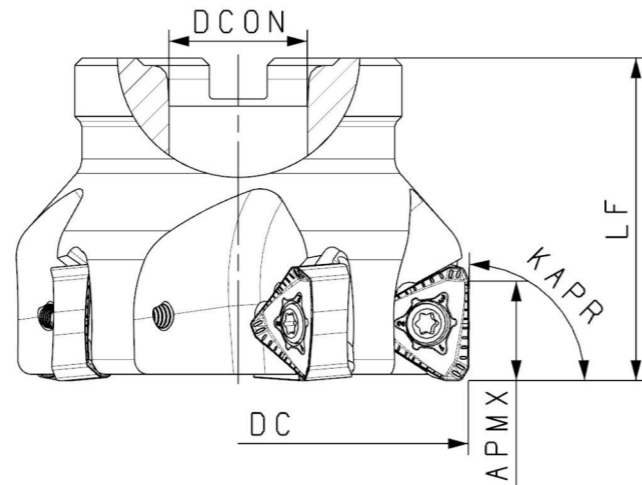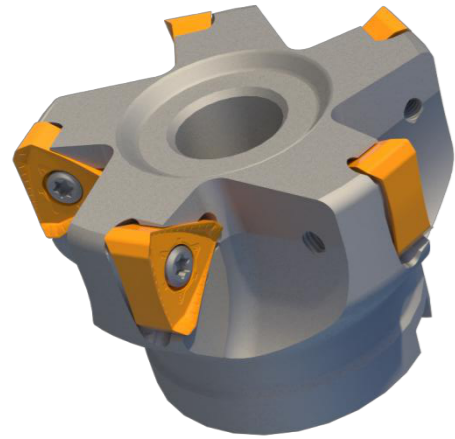

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM902-A22-50-4-TN13	●	4	50		22	40		13	A	TN*1306*	SA0411	T15P
FM902-A22-63-5-TN13	●	5	63		22	40		13	A			
FM902-A27-80-7-TN13	●	7	80		27	50		13	A			
FM902-B32-100-8-TN13	●	8	100		32	50		13	B			
FM902-B40-125-10-TN13	●	10	125		40	63		13	B			
FM902-C40-160-12-TN13	○	12	160		40	63		13	C			
FM902-C60-200-16-TN13	○	16	200		60	63		13	C			

● Stock available ○ Make-to-order

# FM902 milling insert

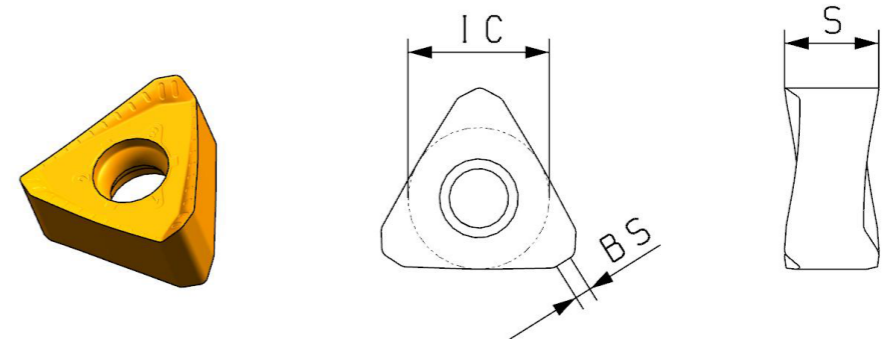


= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Uncoated OK434
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P										=	>>	>>	>>	>>	#	
M											>>	>>			#	
K									>>	=	>>	>>	>>			
N															>>	
S																
H																
TNGX1306PNFR-1	11.46			7.6			1.3			○	○	●				

● Stock available ○ Make-to-order


## Square shoulder milling insert FM903 series

KAPR=90°

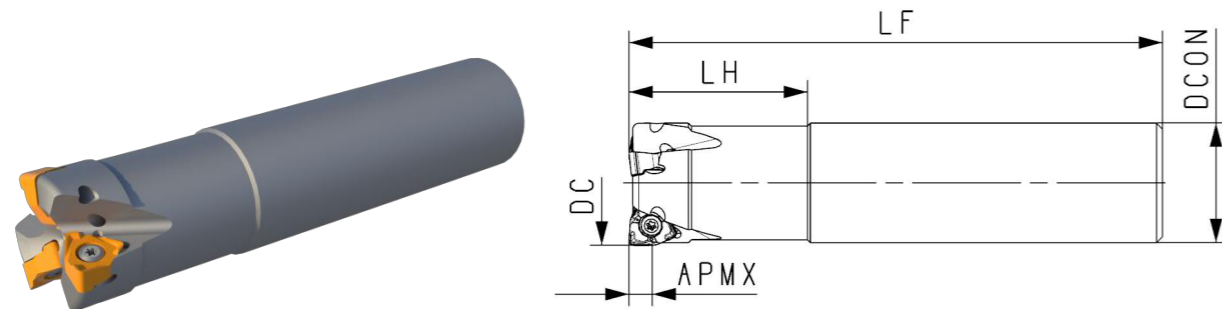

## Square shoulder milling insert FM903 series

KAPR=90°

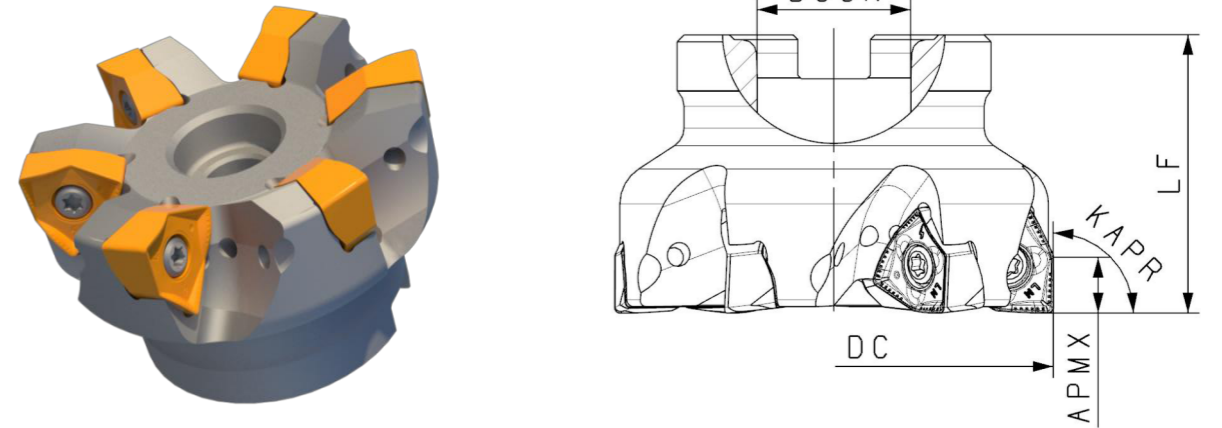


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM903-P20-20-2-WN04-120	○	2	20			120	35	3.8	P	WN*X0403*	SA025065	T08P
FM903-P20-20-3-WN04-120	●	3	20			120	35	3.8	P			
FM903-P20-21-3-WN04-120	○	3	21			120	35	3.8	P			
FM903-P25-25-4-WN04-120	●	4	25			120	35	3.8	P			
FM903-P25-26-4-WN04-120	○	4	26			120	35	3.8	P			
FM903-P32-32-4-WN04-150	●	4	32			150	35	3.8	P			
FM903-P32-33-4-WN04-150	○	4	33			150	35	3.8	P			
FM903-W32-32-2-WN08-120	○	2	32			120	35	8	W	WN*X0806*	SA0411	T15P
FM903-W32-40-4-WN08-120	○	4	40			120	35	8	W			

● Stock available ○ Make-to-order

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM903-A16-40-5-WN04	●	5	40		22	40		3.8	A	WN*X0403*	SA025065	T08P
FM903-A22-50-6-WN04	●	6	50		22	40		3.8	A			
FM903-A22-50-5-WN08	●	5	50		22	40		8	A	WN*X0806*	SA0411	T15P
FM903-A22-63-6-WN08	●	6	63		22	40		8	A			
FM903-A27-80-7-WN08	●	7	80		27	50		8	A			
FM903-B32-100-8-WN08	●	8	100		32	50		8	B			
FM903-B40-125-10-WN08	●	10	125		40	63		8	B			
FM903-C40-160-12-WN08	○	12	160		40	63		8	C			
FM903-C60-200-16-WN08	○	16	200		60	63		8	C			

● Stock available ○ Make-to-order

# FM903 milling insert

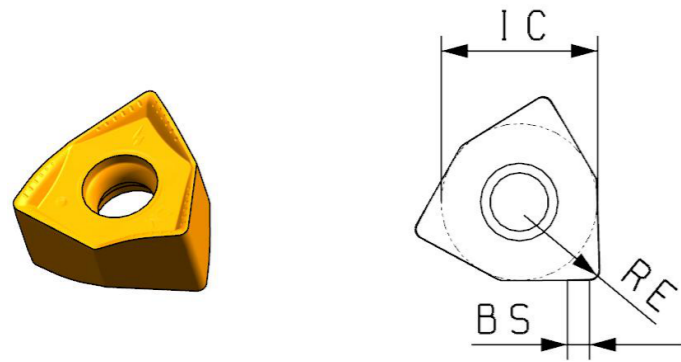



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	P								OC3220	OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	OK434	
	M																
	K																
Type	N								C	V	D	P				pejpeooU	
	S											V	D	D	D		D
	H																
Dimension		IC	L	W1	S	D1	RE	BS									
WNGX040304R-LM	6.5			4		0.4	0.85										
WNMX040308R-OM	6.5			4		0.8	0.5										
WNGX080604R-LM	12.85			6.45		0.4	2.5										
WNMX080608R-OL	12.85			7.8		0.8	1.1										
WNMX080608R-OM	12.85			7.8		0.8	0.8										
WNGX080608R-LF	12.85			6.57		0.8	1.8										
WNGX080608R-LM	12.85			6.45		0.8	2										

● Stock available ○ Make-to-order

# Square shoulder milling—FM904 series

KAPR=90°

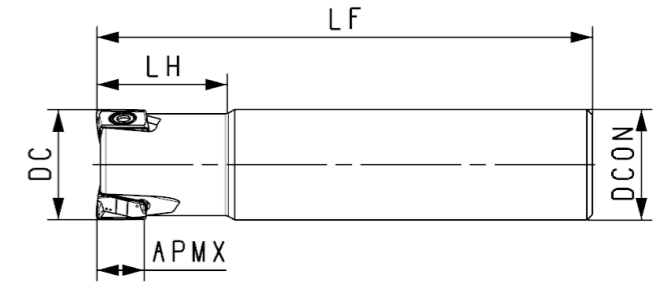
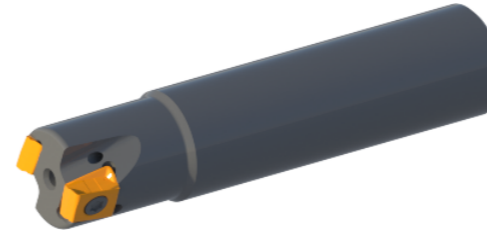


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM904-P20-20-2-LN09-120	●	2	20		20	120	35	7.5	P	LNGX0904*	SA03085	T10P
FM904-P20-20-3-LN09-120	●	3	20		20	120	35	7.5	P			
FM904-P25-25-4-LN09-120	●	4	25		25	120	35	7.5	P			
FM904-P32-32-4-LN09-150	●	4	32		32	150	50	7.5	P			
FM904-P32-32-5-LN09-150	●	5	32		32	150	50	7.5	P			
FM904-P32-35-5-LN09-150	●	5	35		32	150	50	7.5	P			
FM904-P32-40-6-LN09-150	●	6	40		40	150	50	7.5	P			

● Stock available ○ Make-to-order

## Square shoulder milling—FM904 series



KAPR=90°

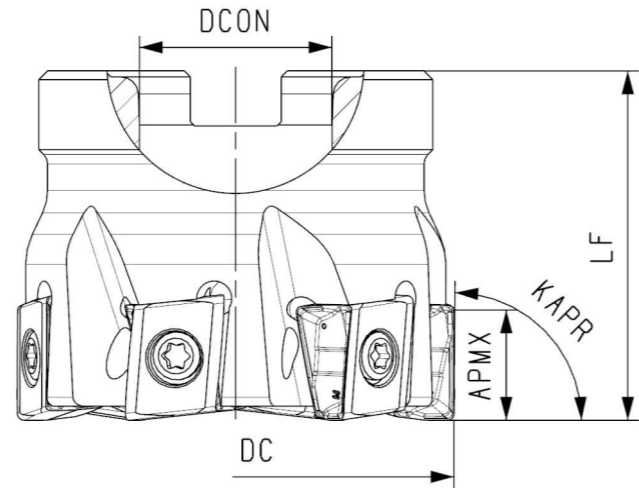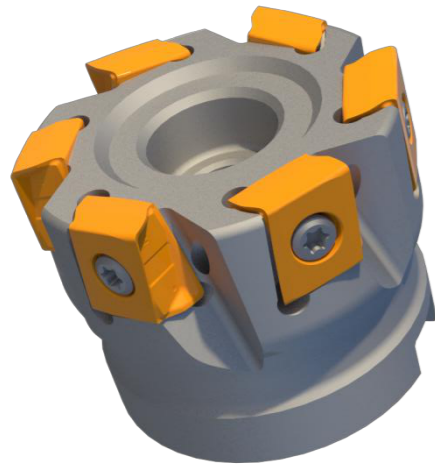

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM904-A16-40-5-LN09	●	5	40		16	40		7.5	A	LNGX0904*	SA03085	T15P
FM904-A22-50-7-LN09	●	7	50		22	40		7.5	A			
FM904-A22-63-9-LN09	●	9	63		22	40		7.5	A			
FM904-A22-50-5-LN13	●	5	50		22	40		11.5	A	LNGX1306*	SA0411	T15P
FM904-A22-50-6-LN13	○	6	50		22	40		11.5	A			
FM904-A22-63-6-LN13	●	6	63		22	40		11.5	A			
FM904-A22-63-8-LN13	○	8	63		22	40		11.5	A			
FM904-A27-80-7-LN13	●	7	80		27	50		11.5	A			
FM904-A27-80-10-LN13	○	10	80		27	50		11.5	A			
FM904-B32-100-10-LN13	●	10	100		32	50		11.5	B			
FM904-B32-100-12-LN13	○	12	100		32	50		11.5	B			
FM904-B40-125-12-LN13	●	12	125		40	63		11.5	B			
FM904-B40-125-14-LN13	○	14	125		40	63		11.5	B			
FM904-C40-160-14-LN13	○	13	160		40	63		11.5	C			
FM904-C60-200-16-LN13	○	16	200		60	63		11.5	C			

● Stock available ○ Make-to-order

## Square shoulder milling—FM904 series

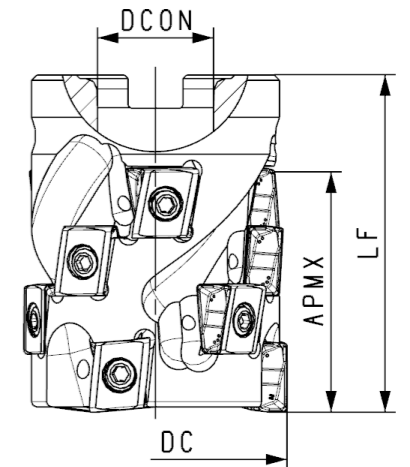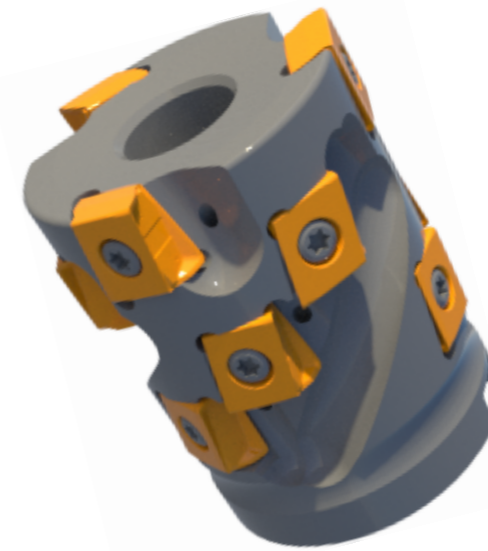


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
FM904-A16-32-2-LN09-38	●	2X5	32		16	57		38	A	LNGX0904*	SA03085	T10P
FM904-A16-40-3-LN09-45	●	3X6	40		16	64		45	A			
FM904-A22-50-4-LN09-45	●	4X6	50		22	64		45	A			
	●											
FM904-A16-40-2-LN13-45	●	2X4	40		16	65		45	A			
FM904-A22-50-3-LN13-45	●	3X4	50		22	64		45	A			
FM904-A27-63-4-LN13-56	●	4X5	63		27	75		56	A			

● Stock available ○ Make-to-order



# FM905 milling insert

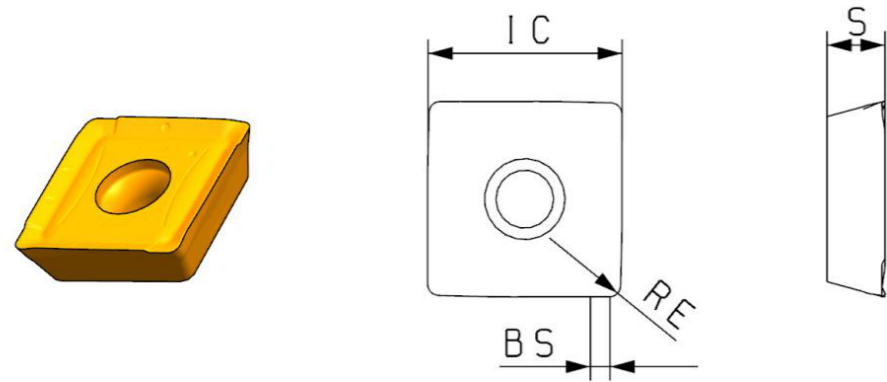


= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Un pa je o o u
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P									=	>>	>>	>>	>>			#
M										>>	>>					#
K									>>	=	>>	>>	>>			
N																>>
S																
H																
SDKT13T308PER-OM	13.8			4.1			1.2		O		●					
SDKT13T320PER-OM	13.8			4.1			1.0		O		●					

● Stock available ○ Make-to-order


# Profiling milling insert RM01 series

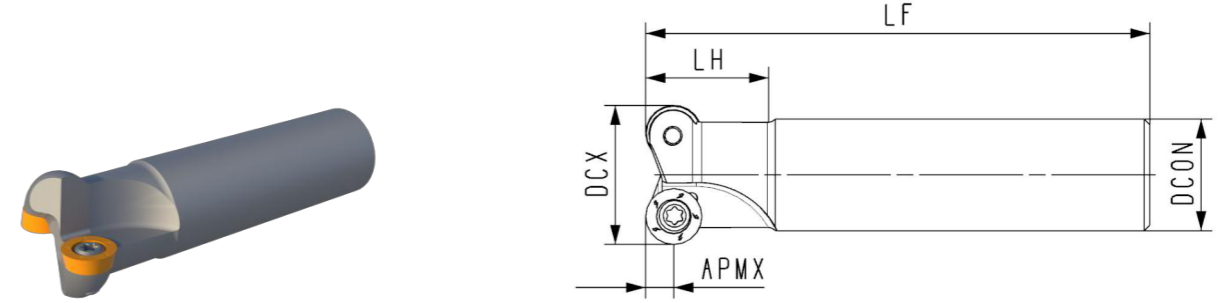


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Accessories	Wrench
			DC	DCX	DCON	LF	LH	APMX				
RM01-P20-25-2-RP10-160-CR	●	2		25	20	160	45	5	P	RP*1003*	Pressing Plate: CR-R5  Screw: SA03510 SA0409	T15P
RM01-P25-30-2-RP10-160-CR	●	3		30	25	160	45	5	P			
RM01-P32-35-3-RP10-160-CR	○	3		35	32	160	45	5	P			
RM01-P32-40-3-RP10-160-CR	●	3		40	32	160	45	5	P			
RM01-P32-40-4-RP10-160-CR	○	4		40	32	160	45	5	P			
RM01-P25-32-2-RP12-160-CR	○	2		32	25	160	50	6	P	RP*1204*	Pressing Plate: CR-R6  Screw: SA0409	T15P
RM01-P25-32-3-RP12-160-CR	○	3		32	25	160	50	6	P			
RM01-P32-32-2-RP12-160-CR	●	2		32	32	160	45	6	P			
RM01-P32-32-3-RP12-160-CR	○	3		32	32	160	45	6	P			
RM01-P32-35-2-RP12-160-CR	○	2		35	32	160	50	6	P			
RM01-P32-40-3-RP12-200-CR	●	3		40	32	200	50	6	P			
RM01-P32-40-4-RP12-200-CR	○	4		40	32	200	50	6	P			

● Stock available ○ Make-to-order

# Profiling milling insert RM01 series

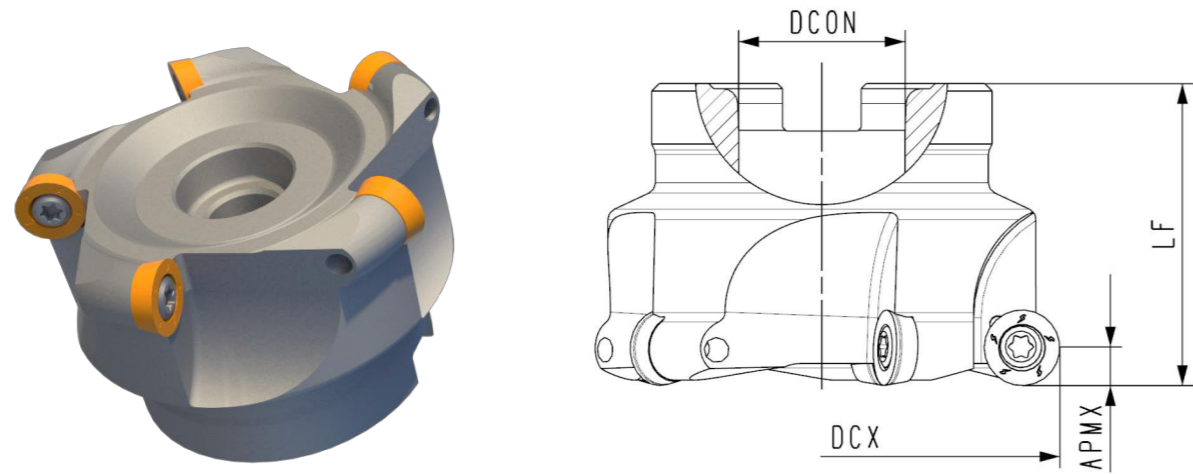

# RM01 milling insert

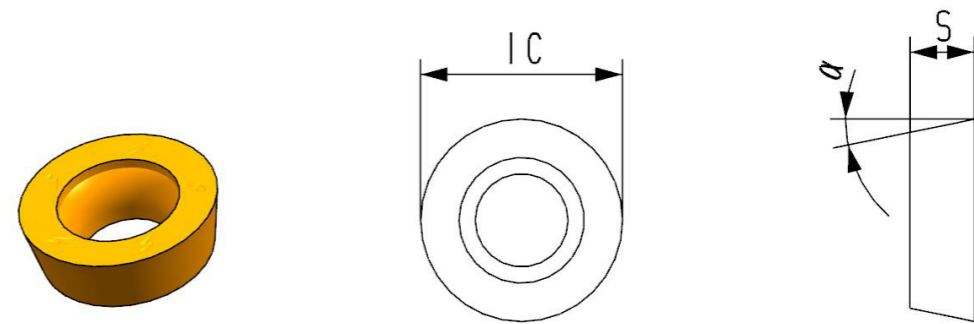

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Accessories	Wrench
			DC	DCX	DCON	LF	LH	APMX				
RM01-A22-50-4-RP10-CR	●	4		50	22	50		5	A	RP*1003* Pressing Plate: CR-R5 Screw: SA03510 SA0409	T15P	
RM01-A22-63-5-RP10-CR	○	5		63	22	50		5	A			
RM01-A27-80-6-RP10-CR	○	6		80	27	50		5	A			
RM01-B32-100-7-RP10-CR	○	7		100	32	50		5	B			
RM01-A22-50-4-RP12-CR	●	4		50	22	50		6	A	RP*1204* Pressing Plate: CR-R6 Screw: SA0409	T15P	
RM01-A22-63-5-RP12-CR	●	5		63	22	50		6	A			
RM01-A27-80-6-RP12-CR	○	6		80	27	50		6	A			
RM01-B32-100-7-RP12-CR	○	7		100	32	50		6	B			

● Stock available ○ Make-to-order



= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Универсальный OK434
	IC	L	W1	S	D1	α	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P									=	>>	>>	>>	>>		#	
M										>>	>>				#	
K									>>	=	>>	>>	>>			
N															>>	
S																
H																
RPMW1003MO-SD	10			3.18		11						○		●		
RPKT1204MO-SD	12			4.76		11						○		●		

● Stock available ○ Make-to-order

# High feed milling tool—HML series



KAPR=90°

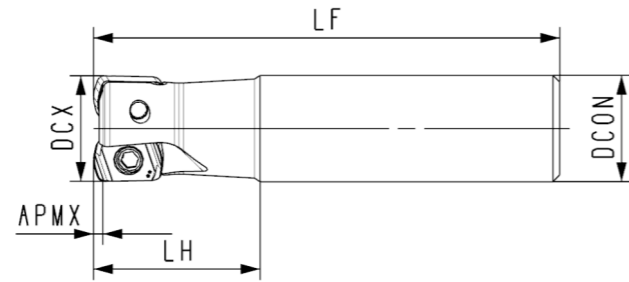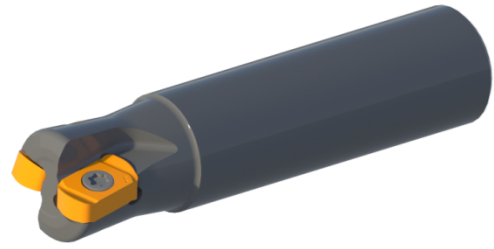

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
HML-P16-16-2-LN10-100	●	2		16	16	100	30	1	P	LNMX10*	SA03065	T8P
HML-P16-17-2-LN10-100	○	2		17	16	100	30	1	P			
HML-P20-20-3-LN10-130	●	3		20	20	130	50	1	P			
HML-P20-21-3-LN10-130	○	3		21	20	130	50	1	P			
HML-P25-25-4-LN10-140	●	4		25	25	140	60	1	P			
HML-P25-26-4-LN10-140	○	4		26	25	140	60	1	P			
HML-P32-32-5-LN10-150	●	5		32	32	150	70	1	P			
HML-P32-35-5-LN10-150	○	5		35	32	150	70	1	P			
HML-P25-25-2-LN13-150	●	2		25	25	150	60	1.3	P			
HML-P25-25-3-LN13-150	●	3		25	25	150	60	1.3	P			
HML-P25-26-3-LN13-150	○	3		26	25	150	60	1.3	P			
HML-P32-30-3-LN13-160	○	3		30	32	160	70	1.3	P			
HML-P32-32-3-LN13-160	●	3		32	32	160	70	1.3	P			
HML-P32-32-4-LN13-160	●	4		32	32	160	70	1.3	P			
HML-P32-33-4-LN13-160	○	4		33	32	160	70	1.3	P			
HML-P32-35-4-LN13-160	●	4		35	32	160	70	1.3	P			

● Stock available ○ Make-to-order

# High feed milling tool—HML series

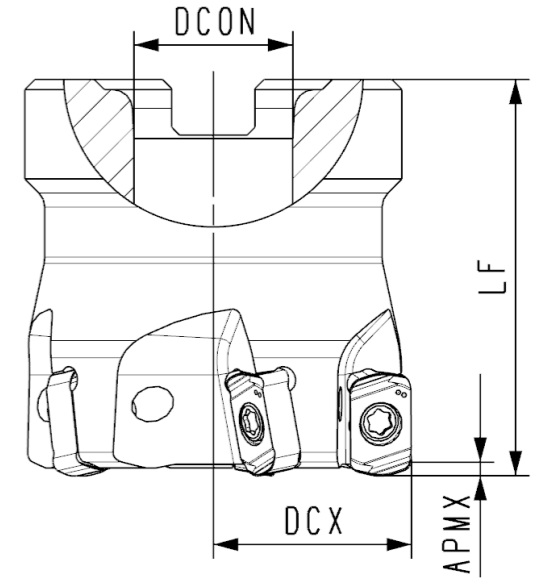
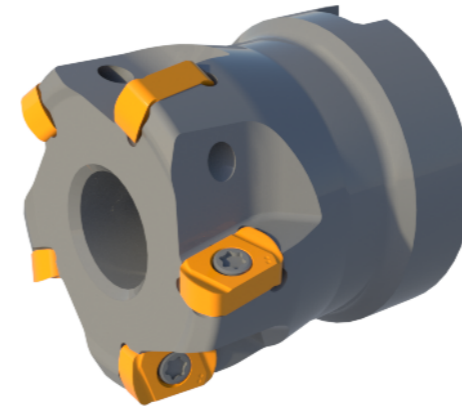


Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
HML-A16-40-6-LN10	●	6		40	16	40		1	A	LNMX10*	SA03065	T8P
HML-A22-50-7-LN10	●	7		50	22	50		1	A			
HML-A22-50-8-LN10	○	8		50	22	50		1	A			
HML-A22-63-8-LN10	●	8		63	22	50		1	A			
HML-A16-40-5-LN13	●	5		40	16	40		1.3	A	LNMX13*	SA03085	T10P
HML-A22-50-6-LN13	●	6		50	22	50		1.3	A			
HML-A22-63-7-LN13	●	7		63	22	50		1.3	A			
HML-A27-80-8-LN13	●	8		80	27	50		1.3	A			

● Stock available ○ Make-to-order

# HML milling inserts

KAPR=90°

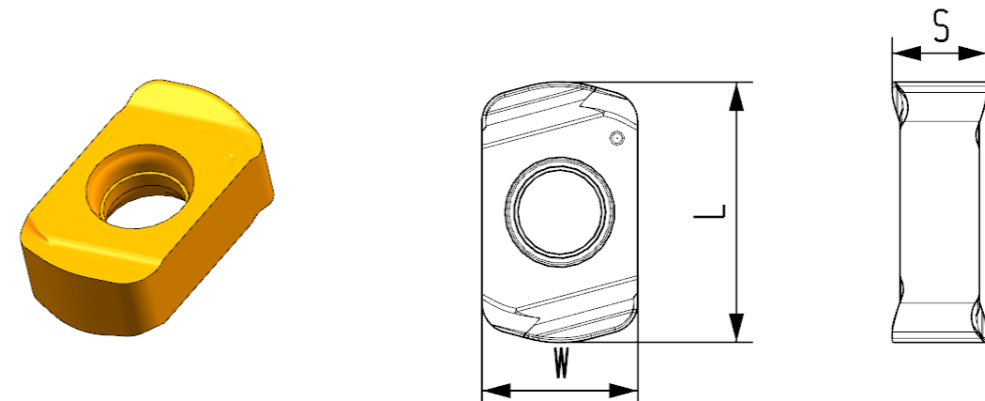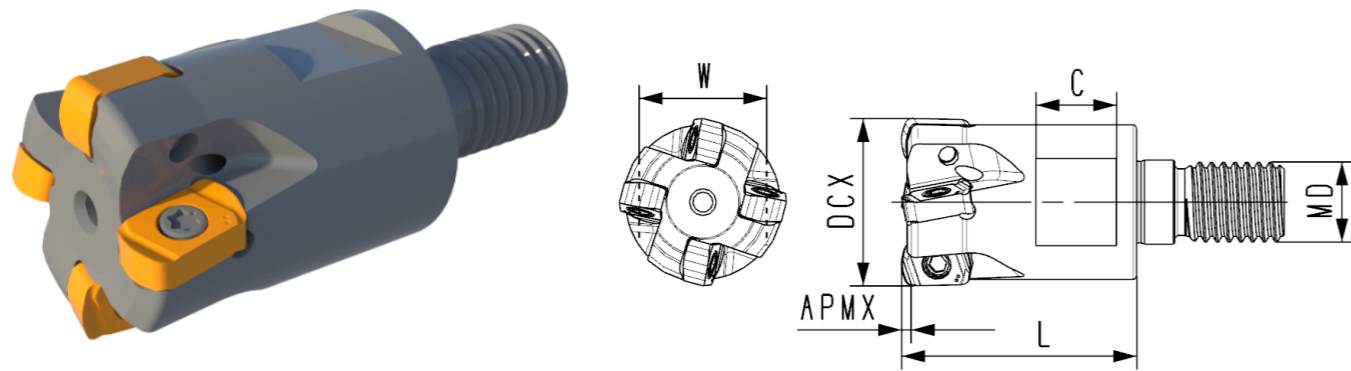

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DCX	L	C	W	MD	APMX				
HML-M8-16-2-LN10	●	2	16	26	8	12	M8	1	LNMX10*	SA03065	T8P	
HML-M8-17-2-LN10	○	2	17	26	8	12	M8	1				
HML-M10-20-3-LN10	●	3	20	30	10	15	M10	1				
HML-M10-21-3-LN10	○	3	21	30	10	15	M10	1				
HML-M12-25-4-LN10	●	4	25	35	12	19	M12	1				
HML-M12-26-4-LN10	○	4	26	35	12	19	M12	1				
HML-M16-32-5-LN10	●	5	32	38	12	24	M16	1				
HML-M16-35-5-LN10	○	5	35	38	12	24	M16	1				
HML-M12-25-2-LN13	●	2	25	35	12	19	M12	1.3	LNMX13*	SA03085	T10P	
HML-M12-25-3-LN13	●	3	25	35	12	19	M12	1.3				
HML-M12-26-3-LN13	○	3	26	35	12	19	M12	1.3				
HML-M16-30-3-LN13	○	3	30	43	12	24	M16	1.3				
HML-M16-32-3-LN13	●	3	32	43	12	24	M16	1.3				
HML-M16-32-4-LN13	●	4	32	43	12	24	M16	1.3				
HML-M16-33-4-LN13	○	4	33	43	12	24	M16	1.3				
HML-M16-35-3-LN13	○	3	35	43	12	24	M16	1.3				
HML-M16-35-4-LN13	○	4	35	43	12	24	M16	1.3				


● Stock available ○ Make-to-order

= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Уточн D
	IC	L	W1	S	D1	α	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P										=	>>	>>	>>	>>	#	
M											>>	>>			#	
K									>>	=	>>	>>	>>			
N																>>
S																
H																
LNMX100312R-OM		10.5	6.3	3.8								●				
LNMX100312R-OL		10.5	6.3	3.8								●				
LNMX130412R-OM		13.43	9.2	4.44								●				
LNMX130412R-OL		13.43	9.2	4.44								●				

● Stock available ○ Make-to-order


# High feed milling insert HM192 series

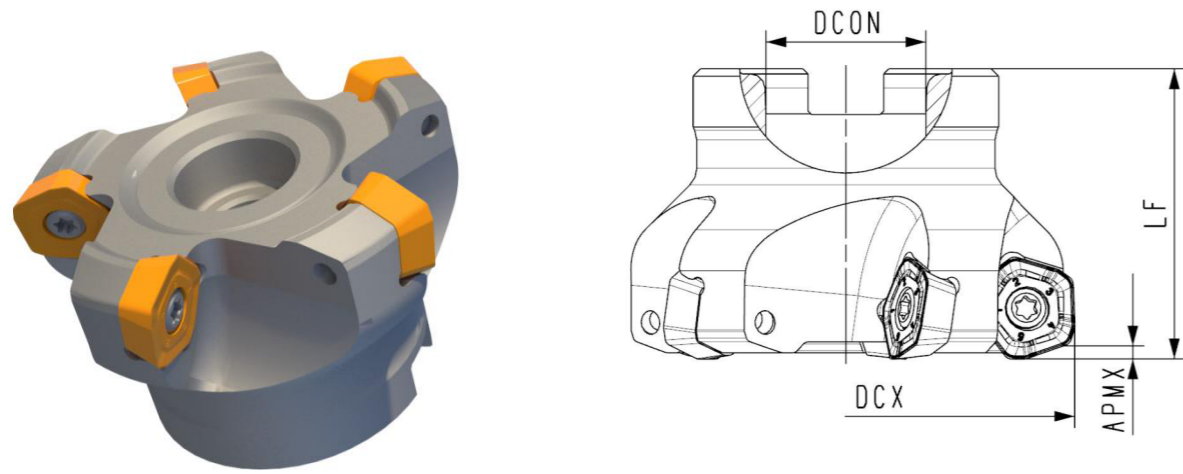

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	DCX	DCON	LF	LH	APMX				
HM192-A22-50-4-PD13	●	4		50	22	40		1.9	A	PD*1305*	SA0411	T15P
HM192-A22-63-5-PD13	●	5		63	22	40		1.9	A			
HM192-A27-80-6-PD13	●	6		80	27	50		1.9	A			
HM192-B32-100-7-PD13	●	7		100	32	50		1.9	B			
HM192-B40-125-8-PD13	●	8		125	40	63		1.9	B			
HM192-C40-160-10-PD13	○	10		160	40	63		1.9	C			
HM192-C60-200-12-PD13	○	12		200	60	63		1.9	C			

● Stock available ○ Make-to-order

# HM192 milling insert



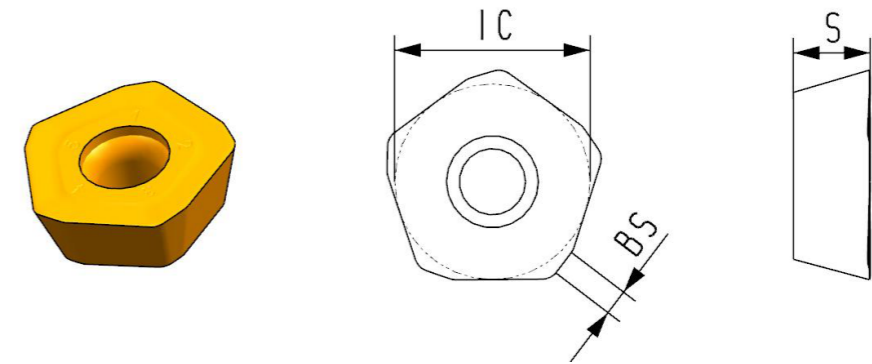


= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D						Un pe re o u n
	IC	L	W1	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
P									=	>>	>>	>>	>>			#
M											>>	>>				#
K									>>	=	>>	>>	>>			
N																>>
S																
H																
PDMT1305ZDSR-SAM	13			5.1			1.7						●			

● Stock available ○ Make-to-order

# Slot milling tool—SM01 series

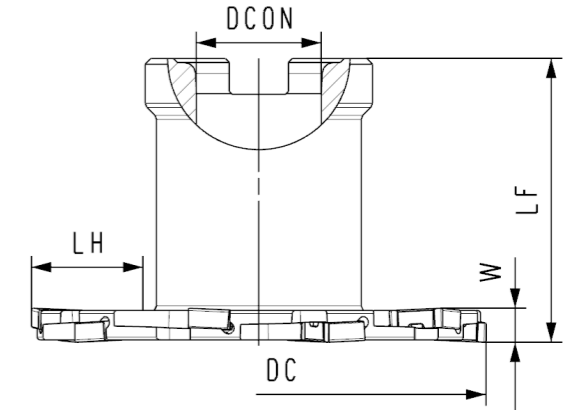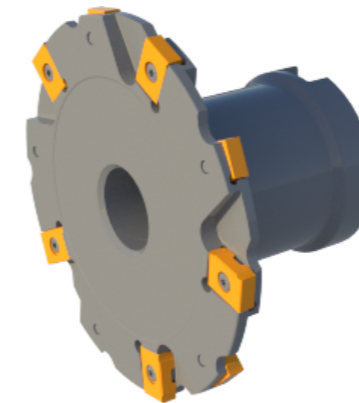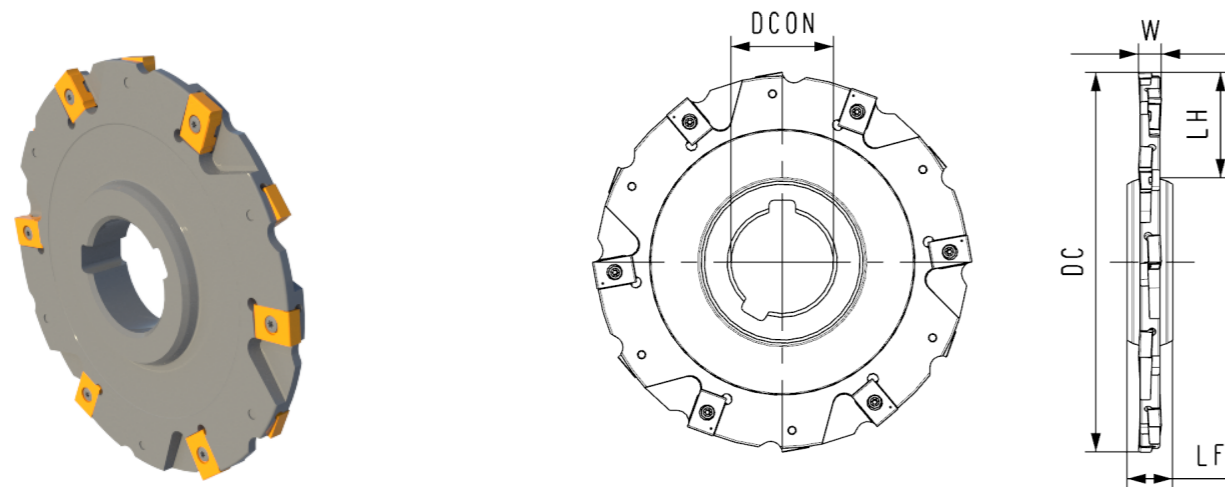


Type	stock	Number of flutes	Dimension					Interface	Adaptable Inserts	Screw	Wrench	
			DC	W	DCON	LF	LH					APMX
SM01-X27-100-04-LN024	●	12	100	4	27	12	27		X	LNHT024-R04	SA02503X	T08P
SM01-X40-125-04-LN024	●	14	125	4	40	12	32		X			
SM01-X40-160-04-LN024	○	18	160	4	40	12	50		X			
SM01-X27-100-05-LN029	●	12	100	5	27	12	27		X	LNHT029-R04	SA02504X	T08P
SM01-X40-125-05-LN029	●	14	125	5	40	12	32		X			
SM01-X40-160-05-LN029	○	18	160	5	40	12	50		X			
SM01-X27-100-06-LN034	●	12	100	6	27	12	27		X	LNHT034-R04	SA02505X	T08P
SM01-X40-125-06-LN034	●	14	125	6	40	12	32		X			
SM01-X40-160-06-LN034	○	18	160	6	40	12	50		X			
SM01-X50-200-06-LN034	○	20	200	6	50	12	63		X	LNHT039-R04	SA02506X	T15P
SM01-X50-250-06-LN034	○	24	250	6	50	12	68		X			
SM01-X27-100-07-LN039	●	10	100	7	27	12	27		X			
SM01-X40-125-07-LN039	●	12	125	7	40	12	32		X	LNHT039-R04	SA02506X	T15P
SM01-X40-160-07-LN039	○	16	160	7	40	12	50		X			
SM01-X50-200-07-LN039	○	18	200	7	50	12	63		X			
SM01-X50-250-07-LN039	○	24	250	7	50	12	88		X	LNHT044-R04	SA02506X	T15P
SM01-X27-100-08-LN044	●	10	100	8	27	12	27		X			
SM01-X40-125-08-LN044	●	12	125	8	40	12	32		X			
SM01-X40-160-08-LN044	○	16	160	8	40	12	50		X	LNHT044-R04	SA02506X	T15P
SM01-X50-200-08-LN044	○	18	200	8	50	12	63		X			
SM01-X50-250-08-LN044	○	24	250	8	50	12	88		X			

Type	stock	Number of flutes	Dimension					Interface	Adaptable Inserts	Screw	Wrench	
			DC	W	DCON	LF	LH					APMX
SM01-A22-80-04-LN024	●	10	80	4	22	50	21		A	LNHT024-R04	SA02503X	T08P
SM01-A27-100-04-LN024	●	12	100	4	27	50	27		A			
SM01-A22-80-05-LN029	●	10	80	5	22	50	21		A	LNHT029-R04	SA02504X	T08P
SM01-A27-100-05-LN029	●	12	100	5	27	50	27		A			
SM01-A22-80-06-LN034	●	10	80	6	22	50	21		A	LNHT034-R04	SA02505X	T08P
SM01-A27-100-06-LN034	●	12	100	6	27	50	27		A			
SM01-B32-125-06-LN034	●	14	125	6	32	50	35		A			
SM01-B40-160-06-LN034	○	18	160	6	40	50	46		A	LNHT039-R04	SA0406X	T15P
SM01-A22-80-07-LN039	●	8	80	7	22	50	21		A			
SM01-A27-100-07-LN039	●	10	100	7	27	50	27		A			
SM01-B32-125-07-LN039	●	12	125	7	32	50	35		A	LNHT039-R04	SA0406X	T15P
SM01-B40-160-07-LN039	○	16	160	7	40	50	46		A			
SM01-A22-80-08-LN044	●	8	80	8	22	50	21		A			
SM01-A27-100-08-LN044	●	10	100	8	27	50	27		A	LNHT044-R04	SA0406X	T15P
SM01-B32-125-08-LN044	●	12	125	8	32	50	35		A			
SM01-B40-160-08-LN044	○	16	160	8	40	50	46		A			

● Stock available ○ Make-to-order

# SM01 milling inserts

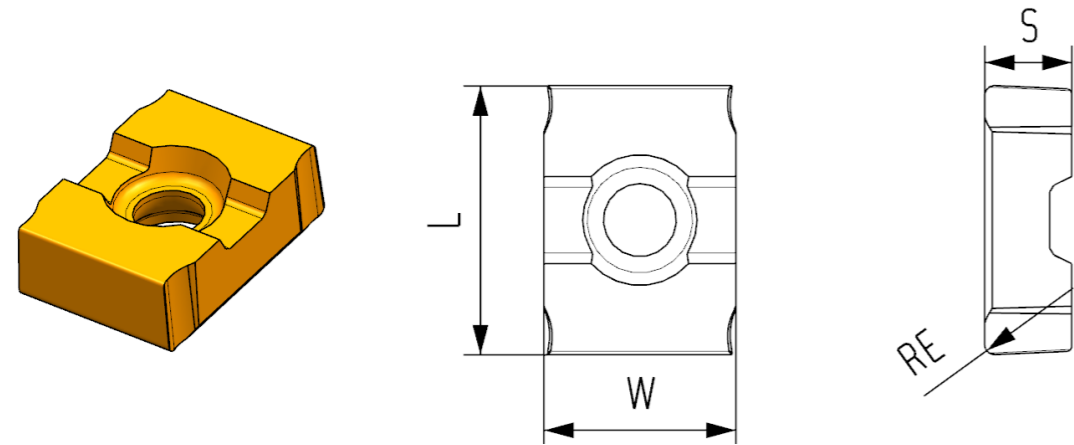


= stable cutting condition >> normal cutting condition # bad cutting condition

Material	P								=	»	»	»	»	#	#	
	M															
Type	K								»	=	»	»	»	#	#	
	N															
	S															
	H															
Type	Dimension								C V D	P V D						Uncoated papecoat
	IC	L	W	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030	OP1630	OP1340	
LNHT024-R04		10.5	7.5	2.4		0.4					●			●		
LNHT029-R04		10.5	7.5	2.9		0.4								●		
LNHT034-R04		10.5	7.5	3.4		0.4					●			●		
LNHT039-R04		13.5	10	3.9		0.4								●		
LNHT044-R04		13.5	10	4.4		0.4					●			●		

● Stock available ○ Make-to-order




# Slot milling tool—SM02 series

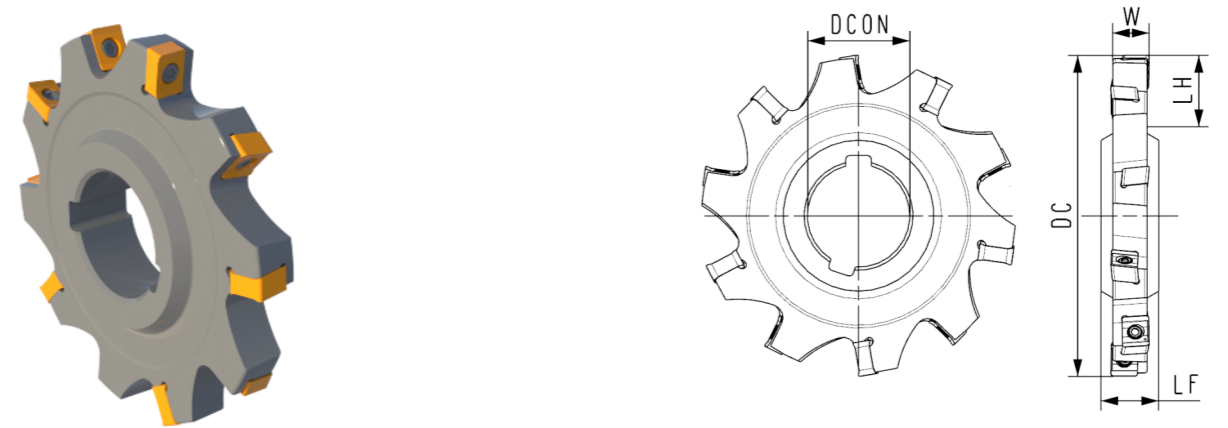

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	W	DCON	LF	LH	APMX				
SM02-X32-100-12-LN08	●	10	100	12	32	16	24		X	LNET08-R08	SA03085	T09P
SM02-X40-125-12-LN08	●	12	125	12	40	18	33		X			
SM02-X40-160-12-LN08	○	14	160	12	40	18	50		X			
SM02-X32-100-14-LN08	●	10	100	14	32	20	24		X			
SM02-X40-125-14-LN08	●	12	125	14	40	20	33		X			
SM02-X40-160-14-LN08	○	14	160	14	40	20	50		X			
SM02-X32-100-16-LN10	●	10	100	16	32	22	24		X	LNET10-R08	SA04011	T15P
SM02-X40-125-16-LN10	●	12	125	16	40	22	33		X			
SM02-X40-160-16-LN10	○	14	160	16	40	22	50		X			
SM02-X32-100-18-LN10	●	10	100	18	32	24	24		X			
SM02-X40-125-18-LN10	●	12	125	18	40	24	33		X			
SM02-X40-160-18-LN10	○	14	160	18	40	24	50		X			
SM02-X32-100-20-LN12	●	10	100	20	40	26	24		X	LNET12-R08	SA04011	T15P
SM02-X40-125-20-LN12	●	12	125	20	40	26	33		X			
SM02-X40-160-20-LN12	○	14	160	20	50	26	50		X			
SM02-X32-100-22-LN12	●	10	100	22	40	28	24		X			
SM02-X40-125-22-LN12	●	12	125	22	40	28	33		X			
SM02-X40-160-22-LN12	○	14	160	22	50	28	50		X			

● Stock available ○ Make-to-order

# SM02 milling inserts

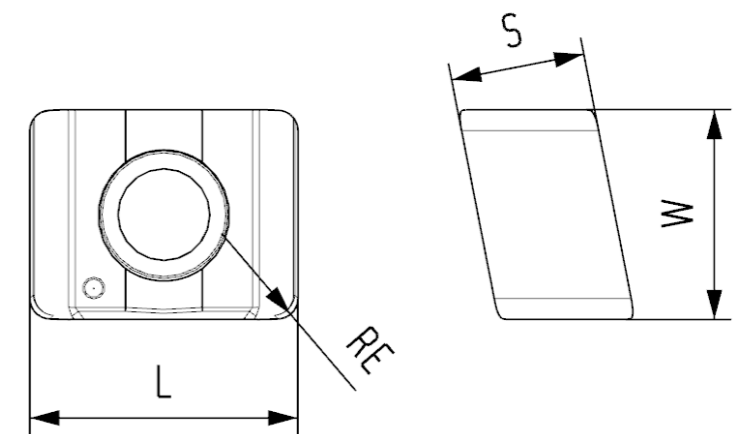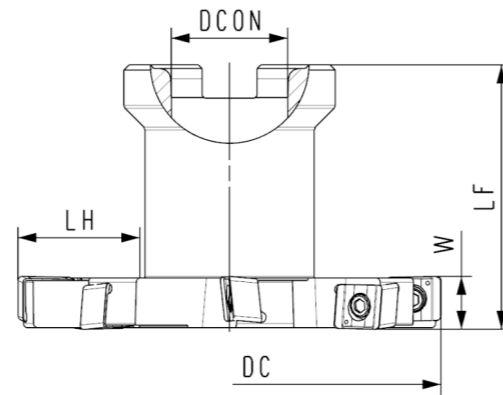

Type	stock	Number of flutes	Dimension						Interface	Adaptable Inserts	Screw	Wrench
			DC	W	DCON	LF	LH	APMX				
SM02-A22-80-12-LN08	●	8	80	12	22	50	23		A	LNET08-R08	SA03085	T09P
SM02-A27-100-12-LN08	●	10	100	12	27	50	29		A			
SM02-B32-125-12-LN08	●	12	125	12	32	50	34		B			
SM02-B40-160-12-LN08	○	14	160	12	40	50	47		B			
SM02-A22-80-14-LN08	●	8	80	14	22	50	23		A	LNET10-R08	SA04011	T15P
SM02-A27-100-14-LN08	●	10	100	14	27	50	29		A			
SM02-B32-125-14-LN08	●	12	125	14	32	50	34		B			
SM02-B40-160-14-LN08	○	14	160	14	40	50	47		B			
SM02-A22-80-16-LN10	●	8	80	16	22	50	23		A	LNET12-R08	SA04011	T15P
SM02-A27-100-16-LN10	●	10	100	16	27	50	29		A			
SM02-B32-125-16-LN10	●	12	125	16	32	50	34		B			
SM02-B40-160-16-LN10	○	14	160	16	40	50	47		B			
SM02-A22-80-18-LN10	●	8	80	18	22	50	23		A	LNET12-R08	SA04011	T15P
SM02-A27-100-18-LN10	●	10	100	18	27	50	29		A			
SM02-B32-125-18-LN10	●	12	125	18	32	50	34		B			
SM02-B40-160-18-LN10	○	14	160	18	40	50	47		B			
SM02-A22-80-20-LN12	●	8	80	20	22	50	23		A	LNET12-R08	SA04011	T15P
SM02-A27-100-20-LN12	●	10	100	20	27	50	29		A			
SM02-B32-125-20-LN12	●	12	125	20	32	50	34		B			
SM02-B40-160-20-LN12	○	14	160	20	40	50	47		B			
SM02-A22-80-22-LN12	●	8	80	22	22	50	23		A	LNET12-R08	SA04011	T15P
SM02-A27-100-22-LN12	●	10	100	22	27	50	29		A			
SM02-B32-125-22-LN12	●	12	125	22	32	50	34		B			
SM02-B40-160-22-LN12	○	14	160	22	40	50	47		B			

● Stock available ○ Make-to-order

= stable cutting condition >> normal cutting condition # bad cutting condition

Material	Dimension								C V D	P V D				Un pe je co u n		
	IC	L	W	S	D1	RE	BS	OC3220		OP2202	OP1315	OP1325	OP1030		OP1630	OP1340
P									=	>>	>>	>>	>>		#	
M											>>	>>			#	
K									>>	=	>>	>>	>>			
N																>>
S																
H																
LNET08-R08		10.5	8.23	5.28		0.8						●			●	
LNET10-R08		11.5	10.23	6		0.8						●			●	
LNET12-R08		11.5	12.23	6		0.8						●			●	

● Stock available ○ Make-to-order




# C Drilling Tools


---

**a** Drilling Inserts ..... 203-204

**b** Drilling Tools ..... 205-212

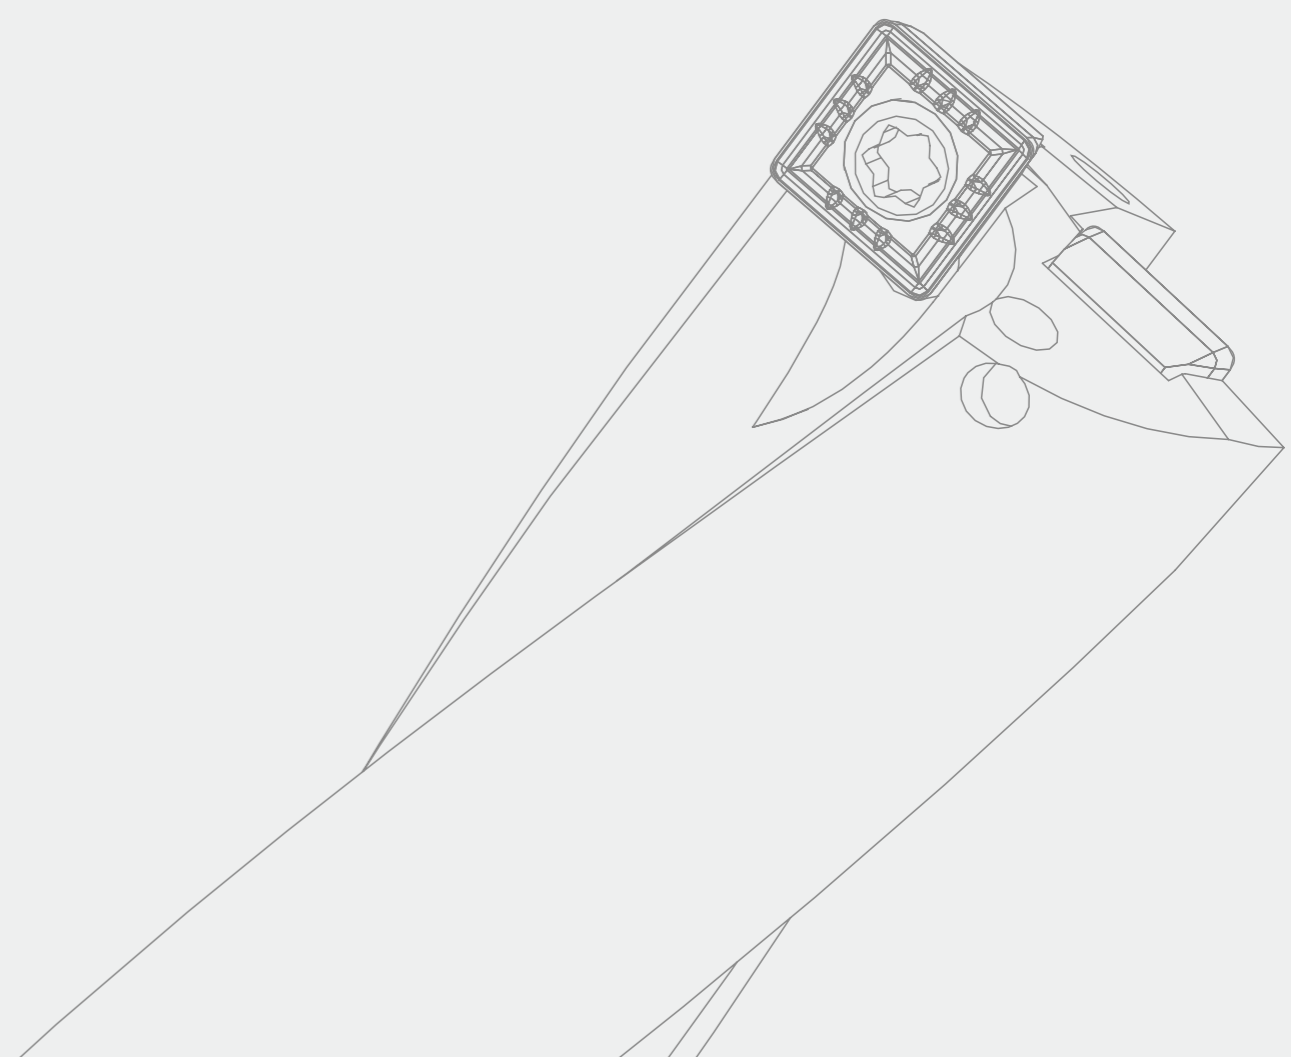


## Indexable Shallow Drilling Insert List

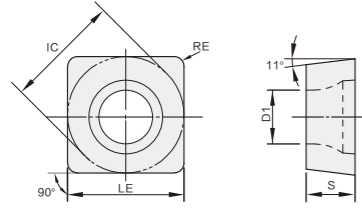

Insert Shape	Type	Dimensions(mm)					Grade	
		LE	IC	S	D1	RE	OP1215	OP1315
	SPGT030104-OPM	3.5	3.5	1.52	1.9	0.397	▲	●
	SPGT040202-OPM	4	4	1.94	2	0.2	▲	●
	SPGT050204-QPM	5	5	2.38	2.2	0.4	▲	●
	SPGT060204-QPM	6	6	2.38	2.6	0.4	▲	●
	SPGT07T308-QPM	7.94	7.94	3.97	2.8	0.8	▲	●
	SPGT090408-QPM	9.8	9.8	4.3	4.2	0.8	▲	●
	SPGT110408-QPM	11.5	11.5	4.76	4.4	0.8	▲	●
	SPGT140512-QPM	14.3	14.3	5.2	5.75	1.2	▲	●


## Indexable Shallow Drilling Insert List

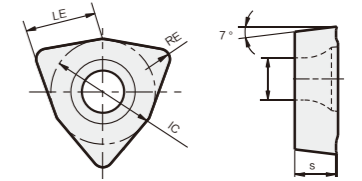

Insert Shape	Type	Dimensions(mm)					Grade	
		LE	IC	S	D1	RE	OP1215	OP1315
	WCMX020104B-ZK	2.6	3.81	2.05	1.9	0.397	▲	●
	WCMX030208B-ZK	3.8	5.56	2.38	2.8	0.8	▲	●
	WCMX040208B-ZK	4.3	6.35	2.38	3.1	0.8	▲	●
	WCMX050308B-ZK	5.4	7.94	3.18	3.2	0.8	▲	●
	WCMX06T308B-ZK	6.5	9.525	3.97	3.7	0.8	▲	●
	WCMX080412B-ZK	8.7	12.7	4.76	4.3	1.2	▲	●


▲ Featured grade ● Optional grade

## Indexable Drilling Inserts Tool Holder

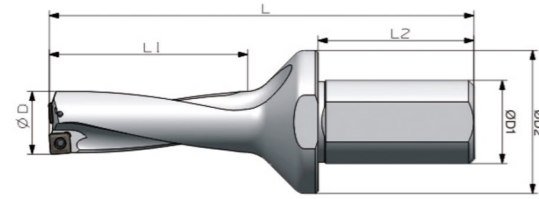

Type	Dimensions(mm)					
	D	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR01-D13-W20-2X	13	20	25	32	50	96
UDR01-D14-W20-2X	14	20	25	34	50	98
UDR01-D15-W20-2X	15	20	25	36	50	100
UDR01-D16-W20-2X	16	20	25	38	50	102
UDR01-D17-W25-2X	17	25	32	40	56	118
UDR01-D18-W25-2X	18	25	32	42	56	120
UDR01-D19-W25-2X	19	25	32	44	56	121
UDR01-D20-W25-2X	20	25	32	46	56	123
UDR01-D21-W25-2X	21	25	32	48	56	125
UDR01-D22-W25-2X	22	25	32	50	56	128
UDR01-D23-W25-2X	23	25	32	52	60	130
UDR01-D24-W25-2X	24	25	32	54	60	132
UDR01-D25-W25-2X	25	25	32	56	60	134
UDR01-D26-W32-2X	26	32	40	58	60	136
UDR01-D27-W32-2X	27	32	40	60	60	138
UDR01-D28-W32-2X	28	32	40	62	60	147
UDR01-D29-W32-2X	29	32	40	64	60	149
UDR01-D30-W32-2X	30	32	40	66	60	151
UDR01-D31-W40-2X	31	40	50	68	60	153
UDR01-D32-W40-2X	32	40	50	70	60	155
UDR01-D33-W40-2X	33	40	50	72	60	157
UDR01-D34-W40-2X	34	40	50	74	60	174
UDR01-D35-W40-2X	35	40	50	76	60	176
UDR01-D36-W40-2X	36	40	50	78	60	178
UDR01-D37-W40-2X	37	40	50	80	70	180
UDR01-D38-W40-2X	38	40	50	82	70	182
UDR01-D39-W40-2X	39	40	50	84	70	184
UDR01-D40-W40-2X	40	40	50	86	70	186
UDR01-D41-W40-2X	41	40	50	88	70	188

## Indexable Drilling Inserts Tool Holder

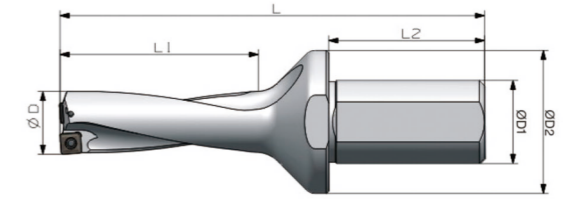


Type	Dimensions(mm)					
	D	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR01-D42-W40-2X	42	40	60	90	70	200
UDR01-D43-W40-2X	43	40	60	92	70	202
UDR01-D44-W40-2X	44	40	60	94	70	204
UDR01-D45-W40-2X	45	40	60	96	70	206
UDR01-D46-W40-2X	46	40	60	98	70	208
UDR01-D47-W40-2X	47	40	60	100	70	210
UDR01-D48-W40-2X	48	40	60	102	70	212
UDR01-D49-W40-2X	49	40	60	104	70	214
UDR01-D50-W40-2X	50	40	60	106	70	216

### Accessories


Insert	Diameter	Screw	Wrench
SPGT050204-QPM	13-16	L60 M2 × 4.3	T06
SPGT060204-QPM	17-21	L60 M2.2 × 5.5	T07
SPGT07T308-QPM	22-27	L60 M2.5 × 6.5	T08
SPGT090408-QPM	28-33	L60 M3.5 × 8	T15
SPGT110408-QPM	34-41	L60 M4 × 10	T15
SPGT140512-QPM	42-50	L60 M5 × 13	T20

## Indexable Drilling Inserts Tool Holder

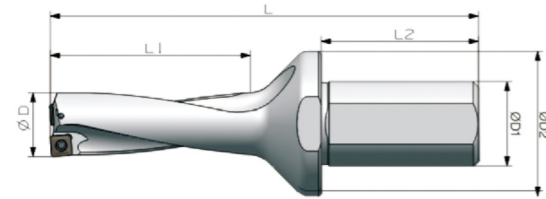

Type	Dimensions(mm)					
	D	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR01-D13-W20-3X	13	20	25	44	50	111
UDR01-D14-W20-3X	14	20	25	47	50	114
UDR01-D15-W20-3X	15	20	25	50	50	127
UDR01-D16-W20-3X	16	20	25	53	50	120
UDR01-D17-W25-3X	17	25	32	56	56	135
UDR01-D18-W25-3X	18	25	32	59	56	138
UDR01-D19-W25-3X	19	25	32	62	56	140
UDR01-D20-W25-3X	20	25	32	65	56	143
UDR01-D21-W25-3X	21	25	32	68	56	146
UDR01-D22-W25-3X	22	25	32	71	56	149
UDR01-D23-W25-3X	23	25	32	74	60	153
UDR01-D24-W25-3X	24	25	32	77	60	156
UDR01-D25-W25-3X	25	25	32	80	60	159
UDR01-D26-W32-3X	26	32	40	83	60	162
UDR01-D27-W32-3X	27	32	40	86	60	165
UDR01-D28-W32-3X	28	32	40	89	60	168
UDR01-D29-W32-3X	29	32	40	92	60	178
UDR01-D30-W32-3X	30	32	40	95	60	181
UDR01-D31-W40-3X	31	40	50	98	60	184
UDR01-D32-W40-3X	32	40	50	101	60	187
UDR01-D33-W40-3X	33	40	50	104	60	190
UDR01-D34-W40-3X	34	40	50	107	60	193
UDR01-D35-W40-3X	35	40	50	110	60	196
UDR01-D36-W40-3X	36	40	50	113	60	199
UDR01-D37-W40-3X	37	40	50	117	70	217
UDR01-D38-W40-3X	38	40	50	119	70	220
UDR01-D39-W40-3X	39	40	50	122	70	223
UDR01-D40-W40-3X	40	40	50	125	70	231
UDR01-D41-W40-3X	41	40	50	128	70	229

## Indexable Drilling Inserts Tool Holder

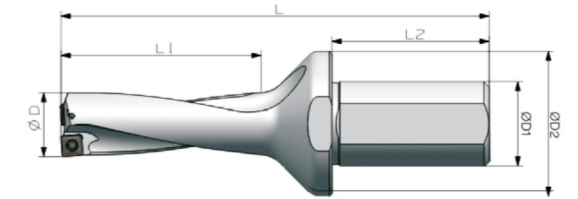


Type	Dimensions(mm)					
	D	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR01-D42-W40-3X	42	40	60	131	70	232
UDR01-D43-W40-3X	43	40	60	134	70	240
UDR01-D44-W40-3X	44	40	60	138	70	248
UDR01-D45-W40-3X	45	40	60	141	70	251
UDR01-D46-W40-3X	46	40	60	144	70	254
UDR01-D47-W40-3X	47	40	60	147	70	257
UDR01-D48-W40-3X	48	40	60	149	70	260
UDR01-D49-W40-3X	49	40	60	152	70	263
UDR01-D50-W40-3X	50	40	60	155	70	266

### Accessories


Insert	Diameter	Screw	Wrench
SPGT050204-QPM	13-16	L60 M2 × 4.3	T06
SPGT060204-QPM	17-21	L60 M2.2 × 5.5	T07
SPGT07T308-QPM	22-27	L60 M2.5 × 6.5	T08
SPGT090408-QPM	28-33	L60 M3.5 × 8	T15
SPGT110408-QPM	34-41	L60 M4 × 10	T15
SPGT140512-QPM	42-50	L60 M5 × 13	T20

## Indexable Drilling Inserts Tool Holder

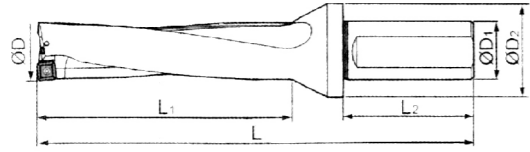

Type	Dimensions(mm)					
	ΦD	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR01-D13-W20-4X	13	20	25	57	50	124
UDR01-D14-W20-4X	14	20	25	61	50	128
UDR01-D15-W20-4X	15	20	25	65	50	132
UDR01-D16-W20-4X	16	20	25	69	50	136
UDR01-D17-W25-4X	17	25	32	73	56	152
UDR01-D18-W25-4X	18	25	32	77	56	156
UDR01-D19-W25-4X	19	25	32	81	56	159
UDR01-D20-W25-4X	20	25	32	85	56	163
UDR01-D21-W25-4X	21	25	32	89	56	167
UDR01-D22-W25-4X	22	25	32	93	56	172
UDR01-D23-W32-4X	23	25	40	97	56	176
UDR01-D24-W32-4X	24	25	40	101	56	180
UDR01-D25-W32-4X	25	25	40	105	56	184
UDR01-D26-W32-4X	26	32	40	109	56	188
UDR01-D27-W32-4X	27	32	40	113	56	192
UDR01-D28-W32-4X	28	32	40	118	60	203
UDR01-D29-W32-4X	29	32	40	122	60	207
UDR01-D30-W32-4X	30	32	40	125	60	211
UDR01-D31-W40-4X	31	40	50	129	60	215
UDR01-D32-W40-4X	32	40	50	133	60	219
UDR01-D33-W40-4X	33	40	50	137	70	223
UDR01-D34-W40-4X	34	40	50	142	70	242
UDR01-D35-W40-4X	35	40	50	146	70	246
UDR01-D36-W40-4X	36	40	50	150	70	250
UDR01-D37-W40-4X	37	40	50	154	70	254
UDR01-D38-W40-4X	38	40	50	158	70	258
UDR01-D39-W40-4X	39	40	50	162	70	262
UDR01-D40-W40-4X	40	40	50	166	70	266
UDR01-D41-W40-4X	41	40	50	170	70	270

## Indexable Drilling Inserts Tool Holder

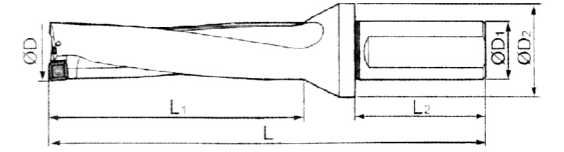


Type	Dimensions(mm)					
	D	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR01-D42-W40-4X	42	40	60	174	70	284
UDR01-D43-W40-4X	43	40	60	178	70	288
UDR01-D44-W40-4X	44	40	60	182	70	292
UDR01-D45-W40-4X	45	40	60	186	70	296
UDR01-D46-W40-4X	46	40	60	190	70	300
UDR01-D47-W40-4X	47	40	60	194	70	304
UDR01-D48-W40-4X	48	40	60	198	70	307
UDR01-D49-W40-4X	49	40	60	202	70	312
UDR01-D50-W40-4X	50	40	60	206	70	316

### Accessories


Insert	Diameter	Screw	Wrench
SPGT050204-QPM	13-16	L60 M2 × 4.3	T06
SPGT060204-QPM	17-21	L60 M2.2 × 5.5	T07
SPGT07T308-QPM	22-27	L60 M2.5 × 6.5	T08
SPGT090408-QPM	28-33	L60 M3.5 × 8	T15
SPGT110408-QPM	34-41	L60 M4 × 10	T15
SPGT140512-QPM	42-50	L60 M5 × 13	T20

# Indexable Drilling Inserts Tool Holder

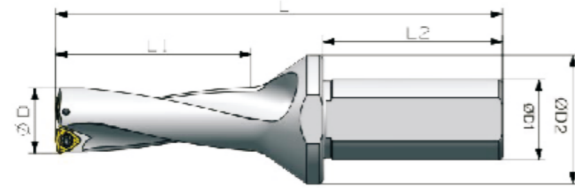

Type	Dimensions(mm)					
	ΦD	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR02-D16-W25-3X	16	25	32	52	56	129
UDR02-D17-W25-3X	17	25	32	55	56	133
UDR02-D18-W25-3X	18	25	32	58	56	137
UDR02-D19-W25-3X	19	25	32	61	56	140
UDR02-D20-W25-3X	20	25	32	64	56	143
UDR02-D21-W25-3X	21	25	32	67	56	153
UDR02-D22-W25-3X	22	25	32	70	56	156
UDR02-D23-W25-3X	23	25	32	73	56	159
UDR02-D24-W25-3X	24	25	32	76	56	162
UDR02-D25-W25-3X	25	25	32	79	56	165
UDR02-D26-W32-3X	26	32	40	83	60	176
UDR02-D27-W32-3X	27	32	40	86	60	180
UDR02-D28-W32-3X	28	32	40	89	60	184
UDR02-D29-W32-3X	29	32	40	92	60	188
UDR02-D30-W32-3X	30	32	40	95	60	192
UDR02-D31-W40-3X	31	40	50	98	70	203
UDR02-D32-W40-3X	32	40	50	101	70	206
UDR02-D33-W40-3X	33	40	50	104	70	209
UDR02-D34-W40-3X	34	40	50	107	70	212
UDR02-D35-W40-3X	35	40	50	110	70	215
UDR02-D36-W40-3X	36	40	50	113	70	218
UDR02-D37-W40-3X	37	40	50	116	70	221
UDR02-D38-W40-3X	38	40	50	119	70	225
UDR02-D39-W40-3X	39	40	50	122	70	228
UDR02-D40-W40-3X	40	40	50	125	70	231
UDR02-D41-W40-3X	41	40	50	128	70	234
UDR02-D42-W40-3X	42	40	60	131	70	239
UDR02-D43-W40-3X	43	40	60	134	70	242
UDR02-D44-W40-3X	44	40	60	137	70	245
UDR02-D45-W40-3X	45	40	60	140	70	248
UDR02-D46-W40-3X	46	40	60	143	70	251
UDR02-D47-W40-3X	47	40	60	146	70	253

# Indexable Drilling Inserts Tool Holder

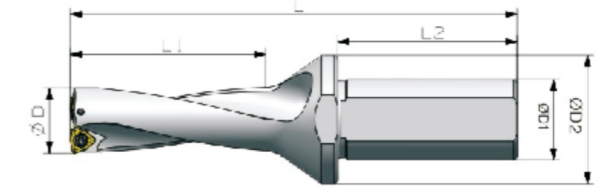


Type	Dimensions(mm)					
	D	ΦD <sub>1</sub>	ΦD <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L
UDR02-D48-W40-3X	48	40	60	149	70	255
UDR02-D49-W40-3X	49	40	60	152	70	257
UDR02-D50-W40-3X	50	40	60	155	70	259
UDR02-D51-W50-3X	51	50	60	158	70	261
UDR02-D52-W50-3X	52	50	60	161	70	263
UDR02-D53-W50-3X	53	50	60	164	70	265
UDR02-D54-W50-3X	54	50	60	167	70	267
UDR02-D55-W50-3X	55	50	60	170	70	269
UDR02-D56-W50-3X	56	50	60	173	70	271
UDR02-D57-W50-3X	57	50	60	176	70	273
UDR02-D58-W50-3X	58	50	60	179	70	275



## Accessories

Insert	Diameter	Screw	Wrench
WCMX030208B-ZK	16-20	L60 M2.5 × 6.5	T08
WCMX040208B-ZK	21-25	L60 M2.5 × 6.5	T08
WCMX050308B-ZK	26-30	L60 M3 × 8	T10
WCMX06T308B-ZK	31-41	L60 M3.5 × 8	T15
WCMX080412B-ZK	42-58	L60 M4 × 10	T15

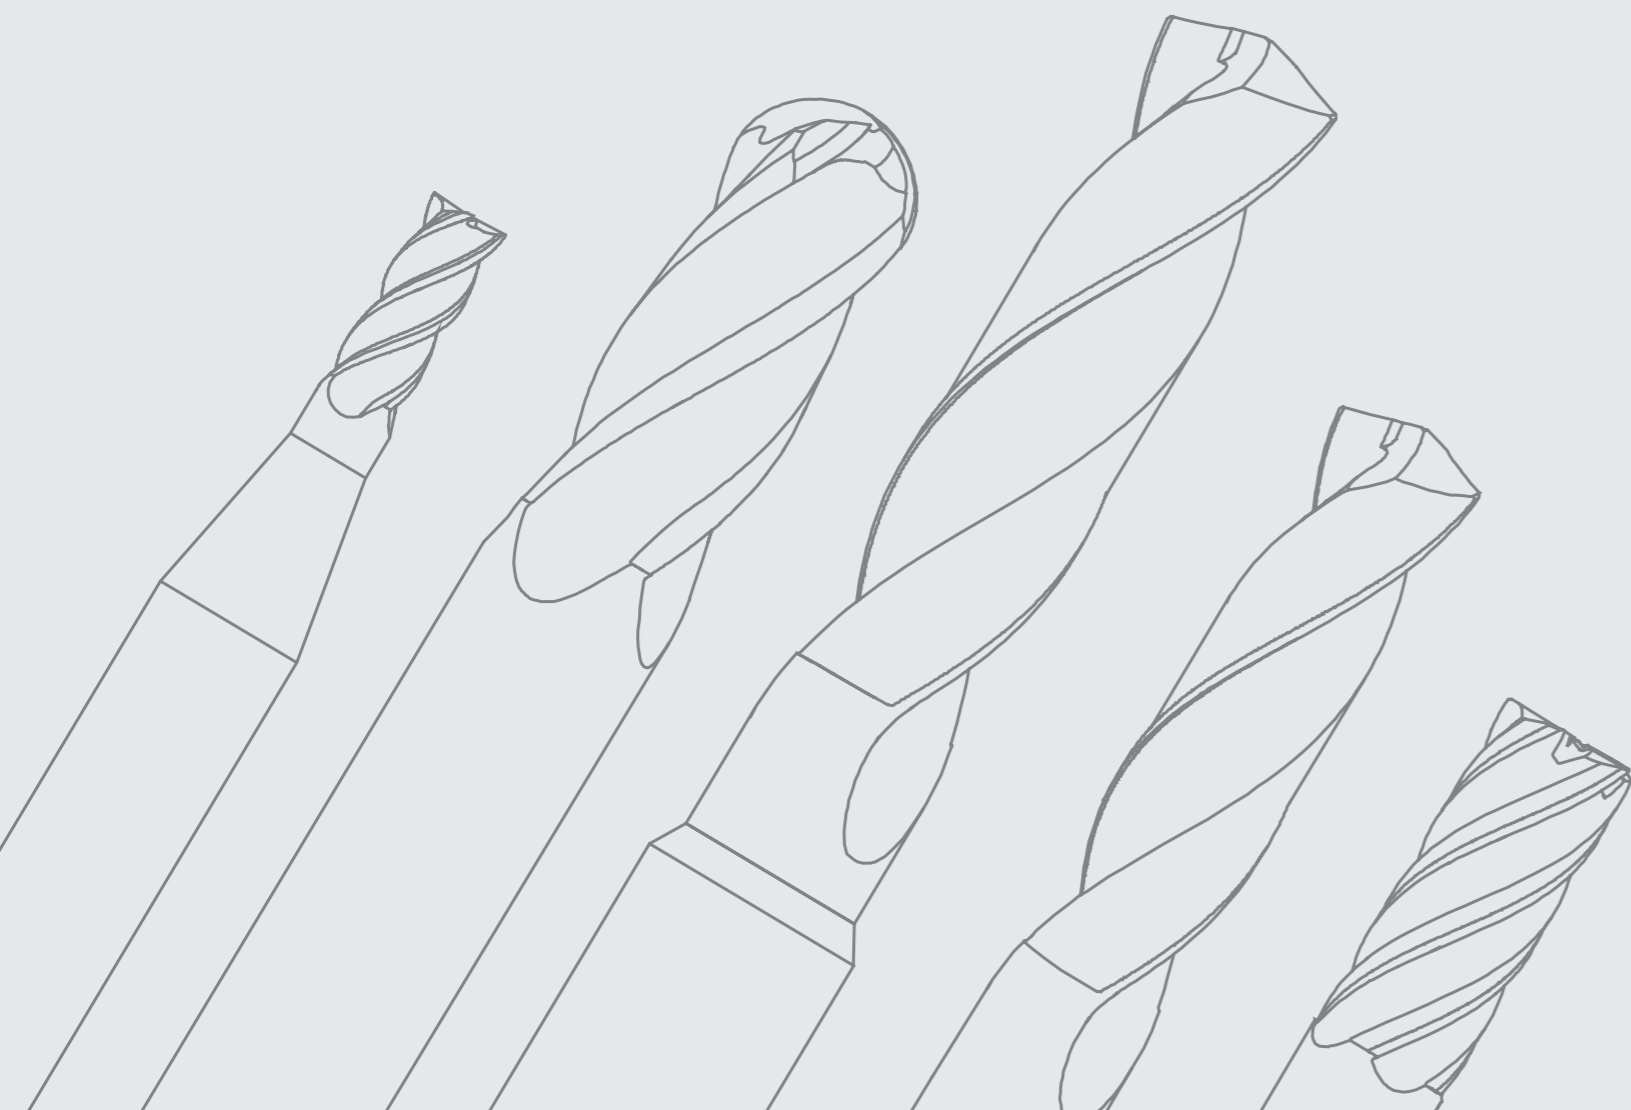

# D Solid End Mill

---


<b>a</b>	Solid End Mills And Drills Naming Rules .....	215
<b>b</b>	Coating Instructions .....	217
<b>c</b>	Identification Instructions .....	218
<b>d</b>	OMPQ Series For General Machining .....	219
<b>e</b>	OMPX Series For High-Performance Machining .....	265
<b>f</b>	OMH Series For Quenched Steel Machining .....	285
<b>g</b>	OMHH Series For High-Hardened Steel Machining .....	305
<b>h</b>	OMS Series For High Temperature Alloy Machining .....	331
<b>i</b>	OMM Series For Stainless Steel Machining .....	349
<b>j</b>	OMAL Series For Aluminum Machining .....	355
<b>k</b>	ODP Drill Series For High-Performance General Machining .....	379

# SOLID END MILLS AND DRILLS NAMING RULES




## 01 Standard Solid End Mills

Naming rules

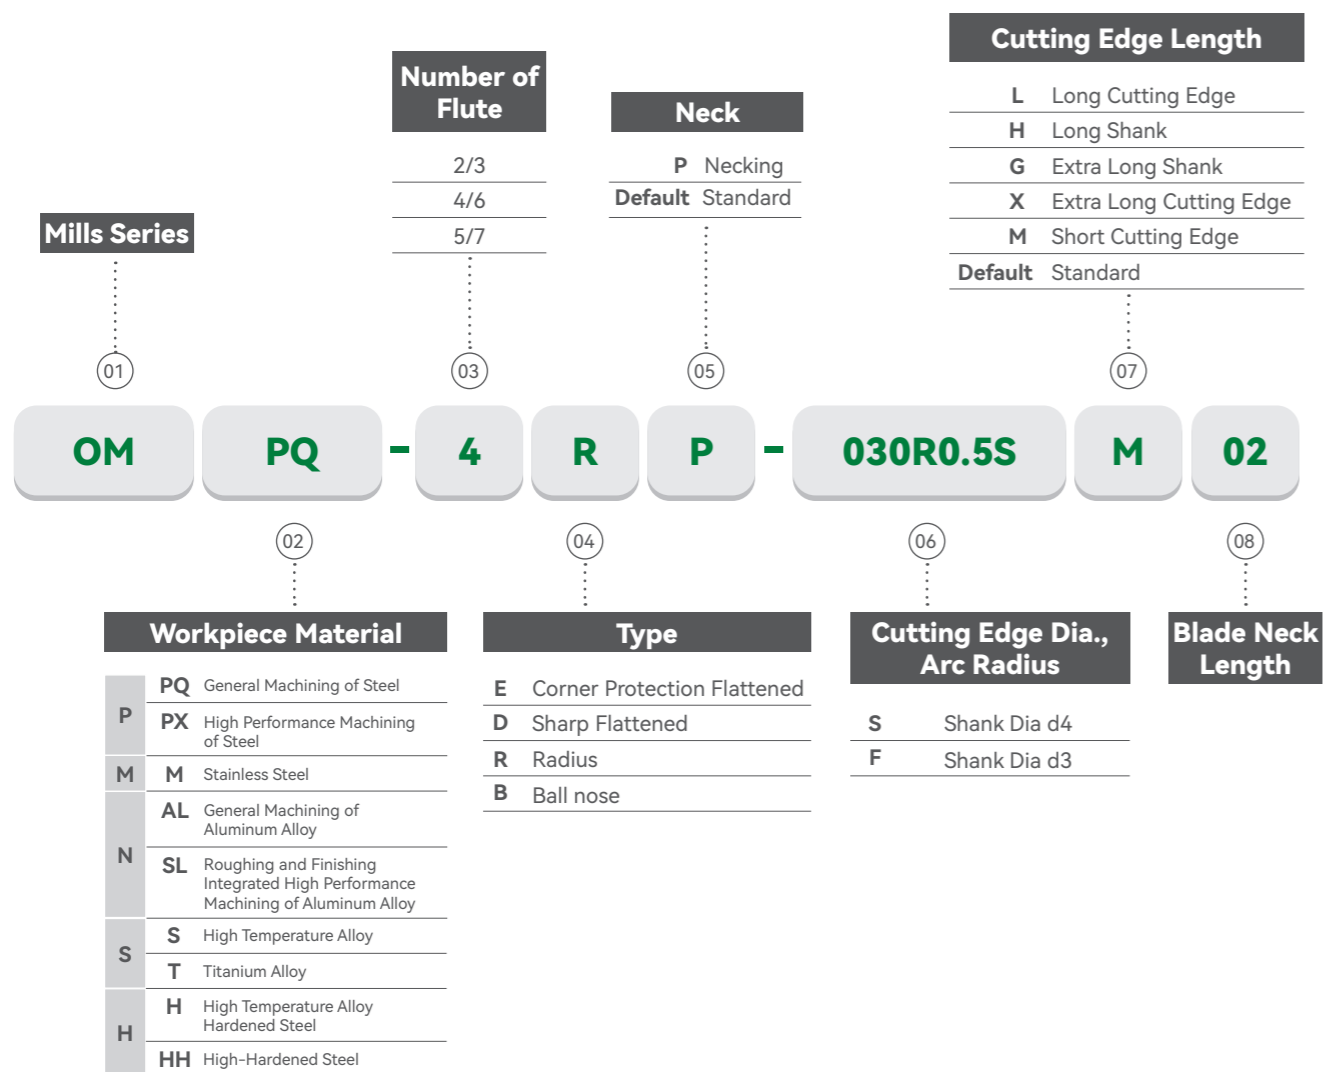

## 02 Standard Solid Drills



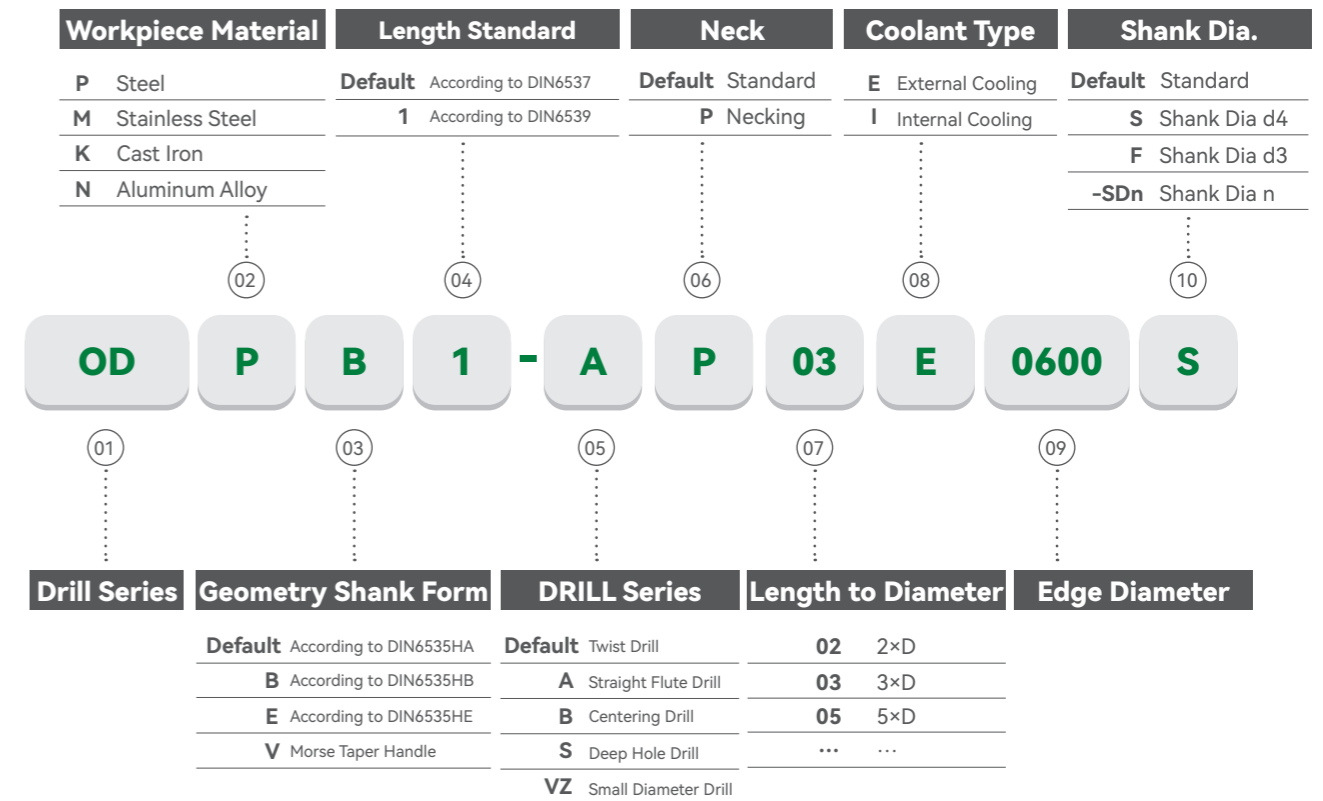























































Naming rules



## COATING SPECIFICATION


COATING NAME	COATING HARDNESS	COATING COLOR	MAXIMUM APPLICABLE TEMPERATURE	RECOMMENDED PROCESSING MATERIALS
EM	3500	Gray-black	1000	Suitable for 38° inner mold steel Stainless Steel
EL	2900	Grey	900	Extremely versatile, suitable for ordinary steel and molds below 55 HRC Various milling processes of steel and titanium alloys
EA	3100	Grey blue	1100	Suitable for milling of 45-55HRC steel parts
ES	4300	Bronz	1000	Especially suitable for milling of high hardness steel with 55-65 HRC
EG	3600	Grey	1250	Suitable for processing high temperature alloys and titanium alloys
EH	1700	Purple red	1100	Suitable for rough machining of Stainless Steel
ED	5000	Rainbow	500	Suitable for aluminum alloy and copper alloy processing
DH	3500	Bronz	1300	Special coating for drills

## IDENTIFICATION INSTRUCTIONS

IDENTIFICATION	INSTRUCTIONS	IDENTIFICATION	INSTRUCTIONS	IDENTIFICATION	INSTRUCTIONS
<b>Shank type</b>	 ISO standard shank	<b>Helical angle</b>	 Left 20° helical Angle	<b>Helical angle</b>	 Double-helical angles
	 ISO standard shank		 15° Helical angle		 Double-helical angles
	 DIN6535HA shank		 20° Helical angle		 Double-helical angles
<b>Coating</b>	 AlCrN coating		 28° Helical angle		 Double-helical angles
	 AlCrSiN coating		 30° Helical angle		 Double-helical angles
	 TiAlN coating		 35° Helical angle		 Double-helical angles
	 AlTiN nano coating		 38° Helical angle	<b>End tooth type</b>	
	 AlCrN/TiSiN multi-layer coating		 40° Helical angle		 Flat
	 AlTiN/TiSiN nano multi-layer coating		 45° Helical angle	 Corner radius	
	 TiAlCrN coating		 Unequal helical angle	 Ball nose	
	 TiAlSiN coating	<b>Number of flute</b>	 1-flute end mills	 Chamfered corner	
	 Coarse grain diamond coating		 2-flute end mills	 Chamfer	
	 Ultra-fine grain diamond coating	 3-flute end mills	<b>Nose corner type</b>	 Corner protection flattened	
<b>Milling Method</b>	 Side milling	 4-flute end mills		 Corner flattened	
	 Slot milling	 5-flute end mills	<b>Length to Diameter</b>		
	 Profile Milling	 6-flute end mills		 3 倍径	
	 Plug Milling	 7-flute end mills	 5 倍径		
	 Trochoidal Milling	<b>Type</b>	 External cooling twist drills	<b>Workpiece material</b>	
	 Internal cooling twist drills		 Steel		
			 Stainless Steel		
			 Cast iron		
			 Aluminum alloy		
			 High temperature alloy/ Titanium alloy		
			 High-hardened steel		


# OMPQ GENERAL END MILLS

PRODUCT SERIES

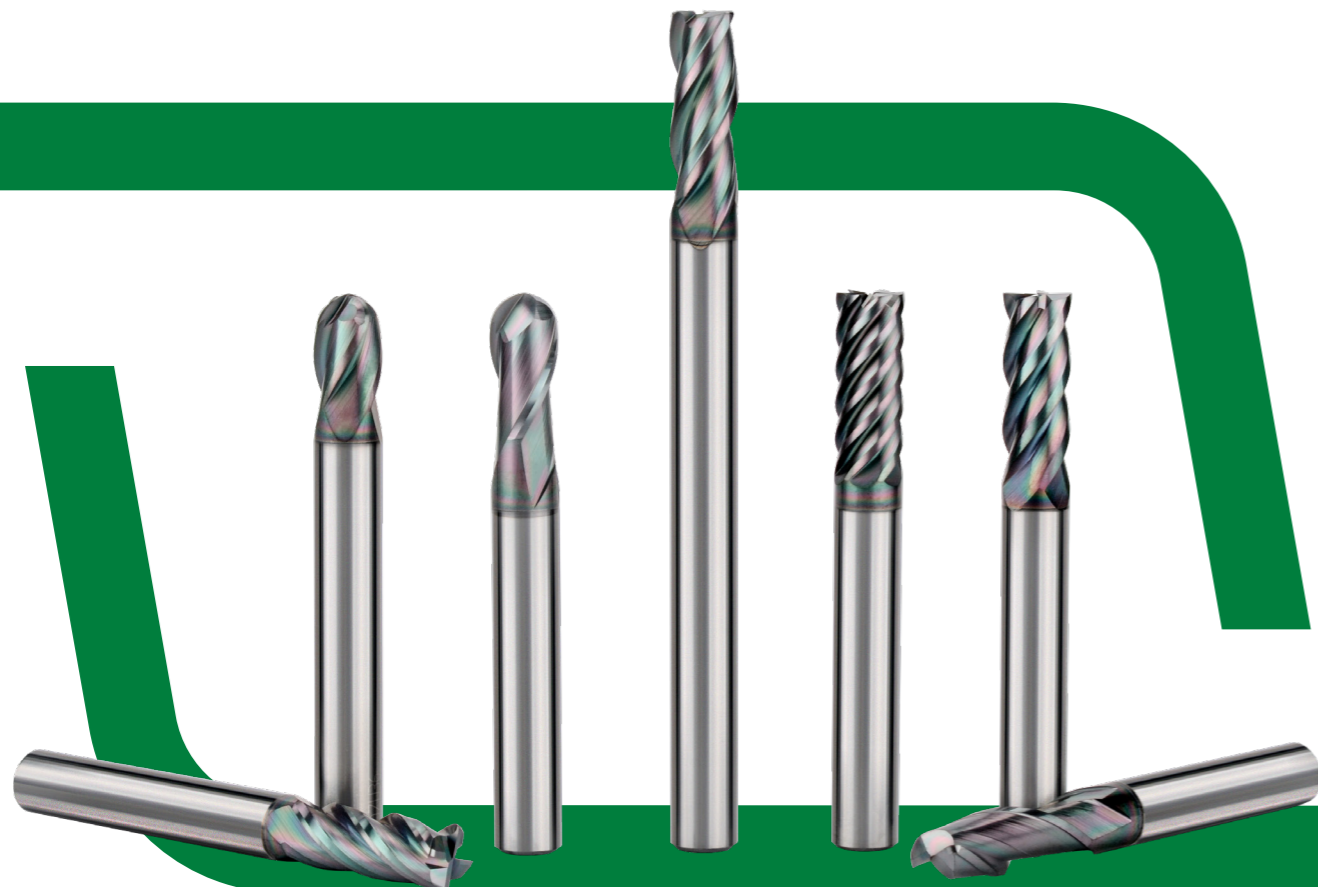

**Grinding process**

High speed and low feed grinding speed, the end face adopts the grinding process of grinding firstly the second-back-angle and then the first-back-angle, making the tool edge smooth, small serration, uniform grinding pattern, and good production consistency.

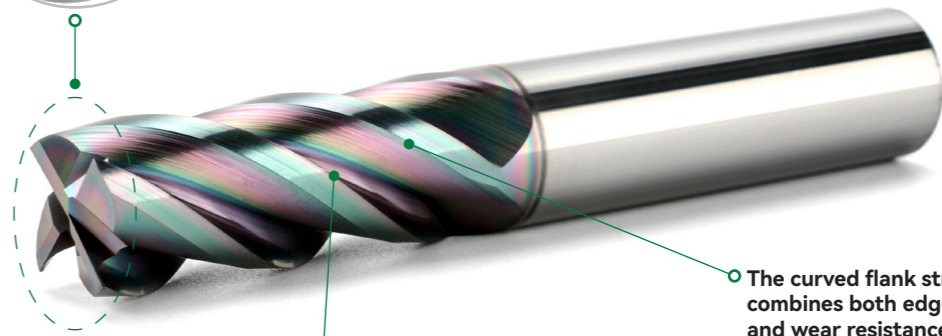

**Helix angle**

The 30° /35° /38° /45° helix angle design is suitable both for roughing and finishing. For roughing, there is enough space for chip removal, for finishing, there is a relatively large lead, thereby increasing the wear resistance of the tool.

The curved flank structure combines both edge strength and wear resistance.

## PROCESSING CASE

Milling method	Machine Tool	Cooling method	Workpiece material	HRC
Side milling	Taiwan Express(M-1612)	water-soluble emulsion	NAK80	HRC40
Cutting parameters				
Rotating speed(N) 7500r/min	Feed rate(F) 2500mm/min	AP 10mm	AE 0.5mm	

Machine tool processing drawing	Tool life comparison							
	<input checked="" type="checkbox"/> OMPQ-4E-080 	<input type="checkbox"/> Products of company A 						
	<p><b>Comparative Analysis of Wear Volume</b> Wear of peripheral edge after 7 hours machining</p> <table border="1"> <caption>Wear Volume Comparison</caption> <thead> <tr> <th>Tool</th> <th>Wear Volume</th> </tr> </thead> <tbody> <tr> <td>OMPQ-4E-080</td> <td>0.068</td> </tr> <tr> <td>A公司</td> <td>0.094</td> </tr> </tbody> </table>		Tool	Wear Volume	OMPQ-4E-080	0.068	A公司	0.094
Tool	Wear Volume							
OMPQ-4E-080	0.068							
A公司	0.094							



# OMPQ-2E

## 2-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

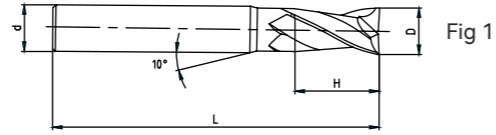

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-2E-010S	1.0	4	3	50	2	1	●
OMPQ-2E-015S	1.5	4	4	50	2	1	●
OMPQ-2E-020S	2.0	4	6	50	2	1	●
OMPQ-2E-025S	2.5	4	8	50	2	1	●
OMPQ-2E-030S	3.0	4	8	50	2	1	●
OMPQ-2E-040S	4.0	4	11	50	2	2	●
OMPQ-2E-010	1.0	6	3	50	2	1	●
OMPQ-2E-015	1.5	6	4	50	2	1	●
OMPQ-2E-020	2.0	6	6	50	2	1	●
OMPQ-2E-025	2.5	6	8	50	2	1	●
OMPQ-2E-030	3.0	6	8	50	2	1	●
OMPQ-2E-035	3.5	6	10	50	2	1	●
OMPQ-2E-040	4.0	6	11	50	2	1	●
OMPQ-2E-045	4.5	6	11	50	2	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2E

## 2-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

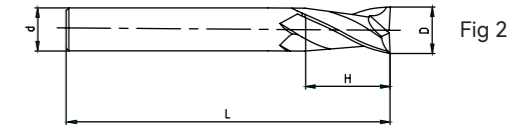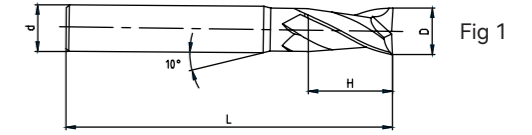

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-2E-050	5.0	6	13	50	2	1	●
OMPQ-2E-055	5.5	6	16	50	2	1	●
OMPQ-2E-060	6.0	6	16	50	2	2	●
OMPQ-2E-070	7.0	8	20	60	2	1	●
OMPQ-2E-080	8.0	8	20	60	2	2	●
OMPQ-2E-090	9.0	10	22	75	2	1	●
OMPQ-2E-100	10.0	10	25	75	2	2	●
OMPQ-2E-110	11.0	12	26	75	2	1	●
OMPQ-2E-120	12.0	12	30	75	2	2	●
OMPQ-2E-140	14.0	14	32	75	2	2	●
OMPQ-2E-160	16.0	16	45	100	2	2	●
OMPQ-2E-180	18.0	18	45	100	2	2	●
OMPQ-2E-200	20.0	20	45	100	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2EL

## 2-Flute Fattened End Mills With Long Cutting Edge



### Diameter Tolerance:

D3~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

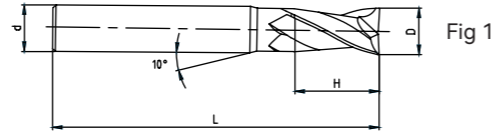

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-2E-030L	3.0	6	12	75	2	1	●
OMPQ-2E-040L	4.0	6	15	75	2	1	●
OMPQ-2E-050L	5.0	6	20	75	2	1	●
OMPQ-2E-060L	6.0	6	20	75	2	2	●
OMPQ-2E-080L	8.0	8	25	100	2	2	●
OMPQ-2E-100L	10.0	10	30	100	2	2	●
OMPQ-2E-120L	12.0	12	35	100	2	2	●
OMPQ-2E-140L	14.0	14	40	100	2	2	●
OMPQ-2E-160L	16.0	16	50	150	2	2	●
OMPQ-2E-200L	20.0	20	55	150	2	2	●

● Stock Available ▲ Make-to-order

OMPQ-2E/2EL Cutting Parameters												
Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel·Alloy Steel ~750N/mm		Carbon Steel·Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	800	40000	800	38000	700	32000	320	22300	200	25000	275
2	24000	900	24000	900	19000	760	16000	400	11150	230	13000	275
3	15500	950	15500	950	12750	760	10600	450	7400	290	8500	280
4	11500	950	11500	950	9550	760	8000	550	5550	370	6500	370
5	9500	1050	9500	1050	7650	800	6400	550	4450	370	5000	375
6	8000	1050	8000	1050	6400	800	5300	580	3700	390	4200	390
8	6000	1300	6000	1300	4800	950	4000	700	2750	455	3200	440
10	4800	1200	4800	1200	3800	900	3200	650	2200	430	2500	440
12	4000	1100	4000	1100	3200	840	2650	610	1850	430	2100	420
16	3000	1050	3000	1050	2400	800	2000	600	1350	380	1600	375
20	2400	950	2400	950	1900	680	1600	560	1100	370	1250	330

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-3E

## 3-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

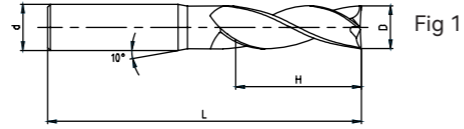

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-3E-010S	1.0	4	3	50	3	1	●
OMPQ-3E-015S	1.5	4	4	50	3	1	●
OMPQ-3E-020S	2.0	4	6	50	3	1	●
OMPQ-3E-025S	2.5	4	8	50	3	1	●
OMPQ-3E-030S	3.0	4	8	50	3	1	●
OMPQ-3E-040S	4.0	4	11	50	3	2	●
OMPQ-3E-010	1.0	6	3	50	3	1	●
OMPQ-3E-015	1.5	6	4	50	3	1	●
OMPQ-3E-020	2.0	6	6	50	3	1	●
OMPQ-3E-025	2.5	6	8	50	3	1	●
OMPQ-3E-030	3.0	6	8	50	3	1	●
OMPQ-3E-035	3.5	6	10	50	3	1	●
OMPQ-3E-040	4.0	6	11	50	3	1	●
OMPQ-3E-045	4.5	6	11	50	3	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-3E

## 3-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

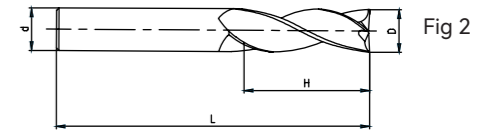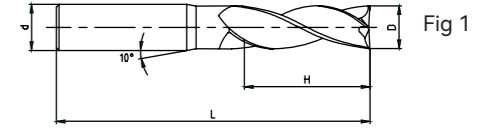

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-3E-050	5.0	6	13	50	3	1	●
OMPQ-3E-055	5.5	6	16	50	3	1	●
OMPQ-3E-060	6.0	6	16	50	3	2	●
OMPQ-3E-070	7.0	8	20	60	3	1	●
OMPQ-3E-080	8.0	8	20	60	3	2	●
OMPQ-3E-090	9.0	10	22	75	3	1	●
OMPQ-3E-100	10.0	10	25	75	3	2	●
OMPQ-3E-110	11.0	12	26	75	3	1	●
OMPQ-3E-120	12.0	12	30	75	3	2	●
OMPQ-3E-140	14.0	14	32	75	3	2	●
OMPQ-3E-160	16.0	16	45	100	3	2	●
OMPQ-3E-180	18.0	18	45	100	3	2	●
OMPQ-3E-200	20.0	20	45	100	3	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-3EL

## 3-Flute Fattened End Mills With Long Cutting Edge



### Diameter Tolerance:

D3~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03



Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-3E-030L	3.0	6	12	75	3	1	●
OMPQ-3E-040L	4.0	6	15	75	3	1	●
OMPQ-3E-050L	5.0	6	20	75	3	1	●
OMPQ-3E-060L	6.0	6	20	75	3	2	●
OMPQ-3E-080L	8.0	8	25	100	3	2	●
OMPQ-3E-100L	10.0	10	30	100	3	2	●
OMPQ-3E-120L	12.0	12	35	100	3	2	●
OMPQ-3E-140L	14.0	14	40	100	3	2	●
OMPQ-3E-160L	16.0	16	50	150	3	2	●
OMPQ-3E-200L	20.0	20	55	150	3	2	●

● Stock Available ▲ Make-to-order

OMPQ-3E/3EL Cutting Parameters												
Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel·Alloy Steel ~750N/mm		Carbon Steel·Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	800	40000	800	38000	700	32000	320	22300	200	25000	275
2	24000	900	24000	900	19000	760	16000	400	11150	230	13000	275
3	15500	950	15500	950	12750	760	10600	450	7400	290	8500	280
4	11500	950	11500	950	9550	760	8000	550	5550	370	6500	370
5	9500	1050	9500	1050	7650	800	6400	550	4450	370	5000	375
6	8000	1050	8000	1050	6400	800	5300	580	3700	390	4200	390
8	6000	1300	6000	1300	4800	950	4000	700	2750	455	3200	440
10	4800	1200	4800	1200	3800	900	3200	650	2200	430	2500	440
12	4000	1100	4000	1100	3200	840	2650	610	1850	430	2100	420
16	3000	1050	3000	1050	2400	800	2000	600	1350	380	1600	375
20	2400	950	2400	950	1900	680	1600	560	1100	370	1250	330

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4E

## 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

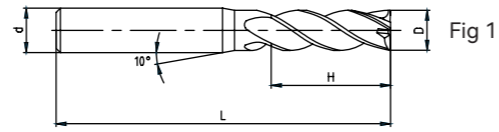

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4E-010F	1.0	3	3	50	4	1	▲
OMPQ-4E-010S	1.0	4	3	50	4	1	●
OMPQ-4E-010	1.0	6	3	50	4	1	●
OMPQ-4E-015F	1.5	3	4	50	4	1	▲
OMPQ-4E-015S	1.5	4	4	50	4	1	●
OMPQ-4E-015	1.5	6	4	50	4	1	●
OMPQ-4E-020F	2.0	3	6	50	4	1	▲
OMPQ-4E-020S	2.0	4	6	50	4	1	●
OMPQ-4E-020	2.0	6	6	50	4	1	●
OMPQ-4E-025F	2.5	3	8	50	4	1	▲
OMPQ-4E-025S	2.5	4	8	50	4	1	●
OMPQ-4E-025	2.5	6	8	50	4	1	●
OMPQ-4E-030F	3.0	3	8	50	4	2	▲
OMPQ-4E-030S	3.0	4	8	50	4	1	●
OMPQ-4E-030	3.0	6	8	50	4	1	●
OMPQ-4E-035S	3.5	4	10	50	4	1	●
OMPQ-4E-035	3.5	6	10	50	4	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4E

## 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

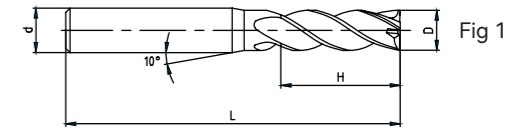

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4E-040S	4.0	4	11	50	4	2	●
OMPQ-4E-040	4.0	6	11	50	4	1	●
OMPQ-4E-045	4.5	6	11	50	4	1	●
OMPQ-4E-050	5.0	6	13	50	4	1	●
OMPQ-4E-055	5.5	6	16	50	4	1	●
OMPQ-4E-060	6.0	6	16	50	4	2	●
OMPQ-4E-070	7.0	8	20	60	4	1	●
OMPQ-4E-080	8.0	8	20	60	4	2	●
OMPQ-4E-090	9.0	10	22	75	4	1	●
OMPQ-4E-100	10.0	10	25	75	4	2	●
OMPQ-4E-110	11.0	12	26	75	4	1	●
OMPQ-4E-120	12.0	12	30	75	4	2	●
OMPQ-4E-140	14.0	14	32	75	4	2	●
OMPQ-4E-160	16.0	16	45	100	4	2	●
OMPQ-4E-180	18.0	18	45	100	4	2	●
OMPQ-4E-200	20.0	20	45	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4EL

## 4-Flute Flattened End Mills With Long Cutting Edge



### Diameter Tolerance:

D3~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

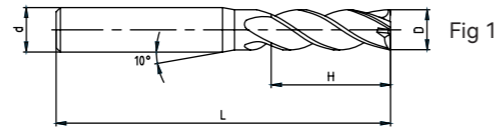

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4E-030L	3.0	6	12	75	4	1	●
OMPQ-4E-040L	4.0	6	15	75	4	1	●
OMPQ-4E-050L	5.0	6	20	75	4	1	●
OMPQ-4E-060L	6.0	6	20	75	4	2	●
OMPQ-4E-080L	8.0	8	25	100	4	2	●
OMPQ-4E-100L	10.0	10	30	100	4	2	●
OMPQ-4E-120L	12.0	12	35	100	4	2	●
OMPQ-4E-140L	14.0	14	40	100	4	2	●
OMPQ-4E-160L	16.0	16	50	150	4	2	●
OMPQ-4E-200L	20.0	20	55	150	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4EX

## 4-Flute Flattened End Mills With Straight Shank And Extra Long Cutting Edge



### Diameter Tolerance:

D3~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

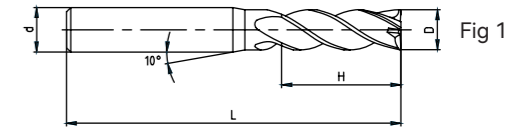

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4E-030X	3.0	6	20	75	4	1	▲
OMPQ-4E-040X	4.0	6	25	75	4	1	▲
OMPQ-4E-050X	5.0	6	30	75	4	1	▲
OMPQ-4E-060X	6.0	6	30	75	4	2	▲
OMPQ-4E-080X	8.0	8	40	100	4	2	▲
OMPQ-4E-100X	10.0	10	50	110	4	2	▲
OMPQ-4E-120X	12.0	12	50	110	4	2	▲
OMPQ-4E-160X	16.0	16	70	150	4	2	▲
OMPQ-4E-200X	20.0	20	75	150	4	2	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-4EX/ 切削参数表 | Parameter list

Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel·Alloy Steel ~750N/mm		Carbon Steel·Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	20000	160	20000	160	20000	125	20000	125	20000	55	20000	95
2	15000	250	15000	250	15000	230	16000	230	11150	65	13000	140
3	14000	430	14000	430	13000	400	10600	400	7500	80	8500	260
4	10800	440	10800	440	10000	400	8000	400	5500	80	6500	265
5	8200	460	8200	460	7600	420	6400	420	4500	80	5000	280
6	5800	475	5800	475	5300	430	4250	340	2650	70	3600	290
8	4400	475	4400	475	4000	430	3180	340	2000	70	2700	290
10	3500	460	3500	460	3200	420	2550	330	1600	70	2150	280
12	2900	460	2900	460	2650	420	2120	330	1350	70	1800	280
16	2200	440	2200	430	2000	390	1590	315	1000	65	1350	260
20	1750	430	1750	430	1600	385	1270	310	800	60	1050	255

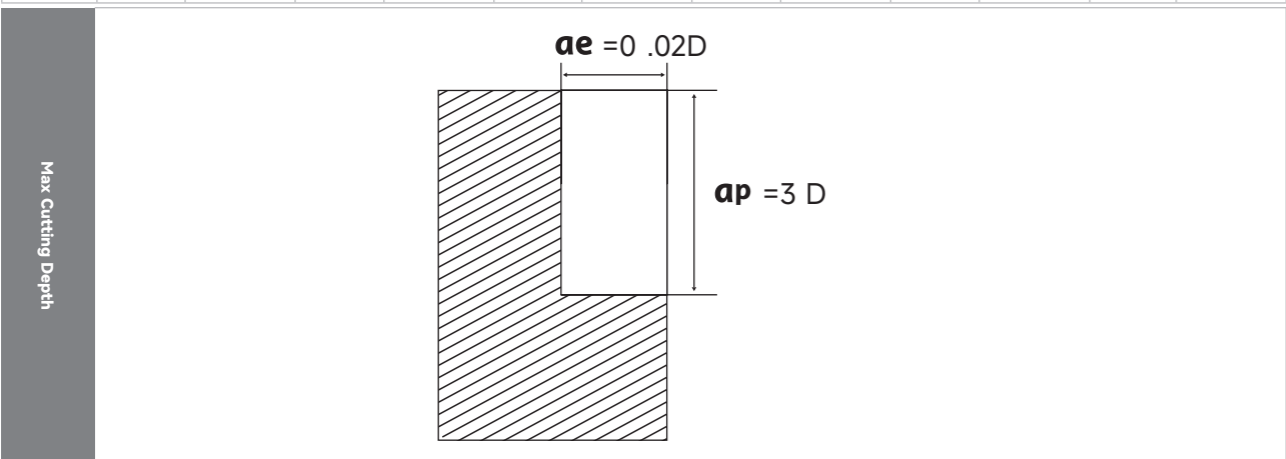



- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

## OMPQ-4D Sharp Flattened 4-Flute Straight Shank Flat End Mills



**Diameter Tolerance:**

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

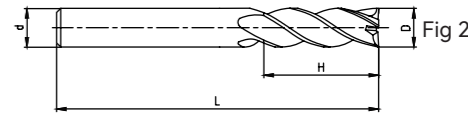

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4D-010S	1.0	4	3	50	4	1	▲
OMPQ-4D-010	1.0	6	3	50	4	1	▲
OMPQ-4D-015S	1.5	4	4	50	4	1	▲
OMPQ-4D-015	1.5	6	4	50	4	1	▲
OMPQ-4D-020S	2.0	4	6	50	4	1	▲
OMPQ-4D-020	2.0	6	6	50	4	1	▲
OMPQ-4D-025S	2.5	4	8	50	4	1	▲
OMPQ-4D-025	2.5	6	8	50	4	1	▲
OMPQ-4D-030S	3.0	4	8	50	4	1	▲
OMPQ-4D-030	3.0	6	8	50	4	1	▲
OMPQ-4D-035	3.5	6	10	50	4	1	▲
OMPQ-4D-040S	4.0	4	11	50	4	2	●
OMPQ-4D-040	4.0	6	11	50	4	1	▲
OMPQ-4D-045	4.5	6	11	50	4	1	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4D

## Sharp Flattened 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

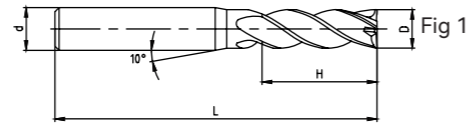

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4D-050	5.0	6	13	50	4	1	▲
OMPQ-4D-055	5.5	6	16	50	4	1	▲
OMPQ-4D-060	6.0	6	16	50	4	2	●
OMPQ-4D-070	7.0	8	20	60	4	1	▲
OMPQ-4D-080	8.0	8	20	60	4	2	●
OMPQ-4D-090	9.0	10	22	75	4	1	▲
OMPQ-4D-100	10.0	10	25	75	4	2	●
OMPQ-4D-110	11.0	12	26	75	4	1	▲
OMPQ-4D-120	12.0	12	30	75	4	2	●
OMPQ-4D-140	14.0	14	32	75	4	2	▲
OMPQ-4D-160	16.0	16	45	100	4	2	●
OMPQ-4D-180	18.0	18	45	100	4	2	▲
OMPQ-4D-200	20.0	20	45	100	4	2	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-4D Cutting Parameters

Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel · Alloy Steel ~750N/mm		Carbon Steel · Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	
1	20000	160	20000	160	20000	125	20000	125	20000	55	20000	95
2	15000	250	15000	250	15000	230	16000	230	11150	65	13000	140
3	14000	430	14000	430	13000	400	10600	400	7500	80	8500	260
4	10800	440	10800	440	10000	400	8000	400	5500	80	6500	265
5	8200	460	8200	460	7600	420	6400	420	4500	80	5000	280
6	7000	470	7000	470	4800	435	5300	435	3700	85	4200	285
8	5200	465	5200	465	4800	430	4000	430	2800	85	3200	290
10	4200	460	4200	460	3800	420	3200	420	2200	85	2500	275
12	3500	460	3500	460	3200	420	2650	420	1850	80	2100	275
14	3000	430	3000	430	2700	400	2300	400	1600	80	1800	260
16	2600	430	2600	430	2400	400	2000	400	1400	80	1600	260
18	2300	420	2300	420	2100	390	1800	390	1250	70	1400	255
20	2050	420	2050	420	1900	390	1600	390	1100	70	1250	255

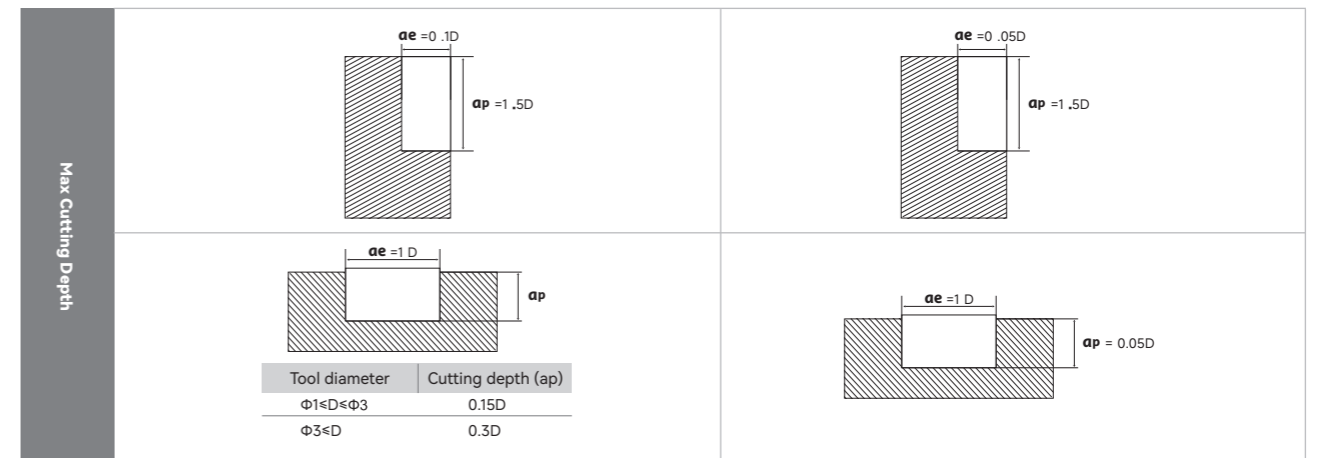

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.



# OMPQ-4EH

## 4-Flute Long Shank Flat End Mills



### Diameter Tolerance:

D3~D6	0,-0.02
D6~D12	0,-0.025



Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPQ-4E-030SH	3.0	4	8	75	4	1	▲
OMPQ--4E-030H	3.0	6	8	75	4	1	▲
OMPQ-4E-040SH	4.0	4	11	75	4	2	▲
OMPQ-4E-040H	4.0	6	11	75	4	1	▲
OMPQ-4E-060H	6.0	6	16	75	4	2	▲
OMPQ-4E-080H	8.0	8	20	75	4	2	▲
OMPQ-4E-100H	10.0	10	25	100	4	2	▲
OMPQ-4E-120H	12.0	12	30	100	4	2	▲

● Stock Available ▲ Make-to-order


# OMPQ-4EG

## 4-Flute Extra Long Shank Flat End Mills



### Diameter Tolerance:

D6~D12	0,-0.025
--------	----------



Type	Basic Dimension (mm)				Number of flute Z	Stock
	D	d	H	L		
OMPQ-4E-060G	6.0	6	16	100	4	▲
OMPQ-4E-080G	8.0	8	20	100	4	▲
OMPQ-4E-100G	10.0	10	25	150	4	▲
OMPQ-4E-120G	12.0	12	30	150	4	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable


Hardness unit: HRC

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable


Hardness unit: HRC

OMPQ-4E/4EL、G、H Cutting Parameters												
Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel·Alloy Steel ~750N/mm		Carbon Steel·Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	20000	250	20000	250	20000	200	20000	200	20000	90	20000	150
2	15000	400	15000	400	15000	360	16000	350	11150	100	13000	225
3	14000	680	14000	680	13000	630	10600	525	7500	120	8500	410
4	10800	700	10800	700	10000	640	8000	535	5500	125	6500	420
5	8200	730	8200	730	7600	670	6400	560	4500	125	5000	440
6	7000	750	7000	750	4800	690	5300	575	3700	135	4200	450
8	5200	740	5200	740	4800	680	4000	565	2800	135	3200	460
10	4200	730	4200	730	3800	670	3200	560	2200	135	2500	435
12	3500	730	3500	730	3200	670	2650	560	1850	135	2100	435
14	3000	680	3000	680	2700	630	2300	525	1600	125	1800	410
16	2600	680	2600	680	2400	630	2000	525	1400	120	1600	410
18	2300	670	2300	670	2100	620	1800	515	1250	105	1400	405
20	2050	670	2050	670	1900	620	1600	515	1100	105	1250	405

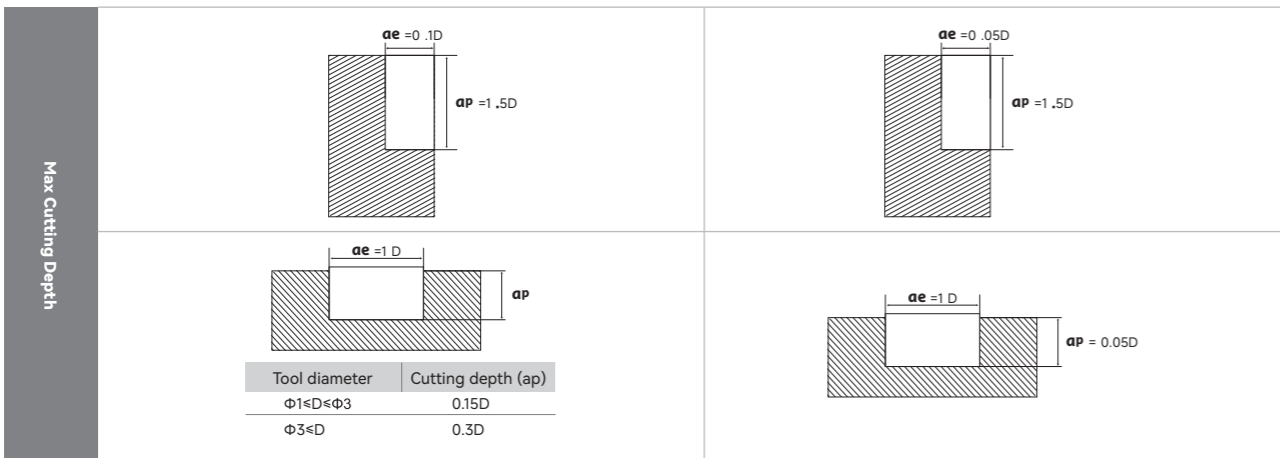

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

## OMPQ-6E 6-Flute Straight Shank Flat End Mills

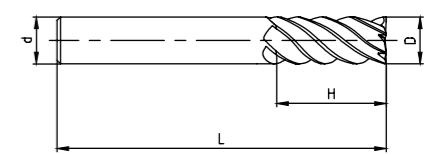

### Diameter Tolerance:

D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

Type	Basic Dimension (mm)				Number of flute Z	Stock
	D	d	H	L		
OMPQ-6E-060	6.0	6	16	60	6	●
OMPQ-6E-080	8.0	8	20	60	6	●
OMPQ-6E-100	10.0	10	30	75	6	●
OMPQ-6E-120	12.0	12	32	75	6	●
OMPQ-6E-160	16.0	16	40	100	6	●
OMPQ-6E-200	20.0	20	45	100	6	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMPQ-6EL

## 6-Flute Flattened End Mills With Straight Shank And Long Cutting Edge

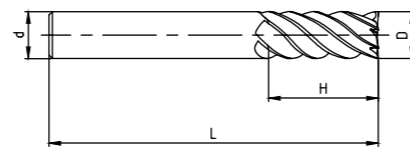

### Diameter Tolerance:

D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

Type	Basic Dimension (mm)				Number of flute Z	Stock
	D	d	H	L		
OMPQ-6E-060L	6.0	6	24	75	6	●
OMPQ-6E-080L	8.0	8	32	75	6	●
OMPQ-6E-100L	10.0	10	40	100	6	●
OMPQ-6E-120L	12.0	12	45	100	6	●
OMPQ-6E-160L	16.0	16	64	150	6	●
OMPQ-6E-200L	20.0	20	75	150	6	●

● Stock Available ▲ Make-to-order

OMPQ-6E/6EL Cutting Parameters												
Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel·Alloy Steel ~750N/mm		Carbon Steel·Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
6	7000	750	7000	750	6400	690	5300	575	3700	135	4200	450
8	5200	740	5200	740	4800	680	4000	565	2800	135	3200	460
10	4200	730	4200	730	3800	670	3200	560	2200	135	2500	435
12	3500	730	3500	730	3200	670	2650	560	1850	135	2100	435
16	2600	680	2600	680	2400	630	2000	525	1400	120	1600	410
20	2050	670	2050	670	1900	620	1600	515	1100	105	1250	405

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2R

## 2-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03
Corner Radius Tolerance ±0.02	

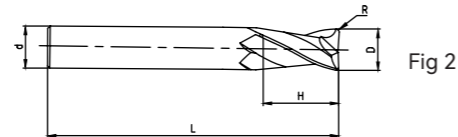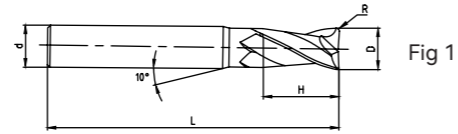

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-2R-010R0.2S	1.0	0.2	4	3	50	2	1	●
OMPQ-2R-015R0.2S	1.5	0.2	4	4	50	2	1	●
OMPQ-2R-020R0.2S	2.0	0.2	4	6	50	2	1	●
OMPQ-2R-020R0.5S	2.0	0.5	4	6	50	2	1	●
OMPQ-2R-025R0.2S	2.5	0.2	4	8	50	2	1	●
OMPQ-2R-025R0.5S	2.5	0.5	4	8	50	2	1	●
OMPQ-2R-030R0.2S	3.0	0.2	4	8	50	2	1	●
OMPQ-2R-030R0.3S	3.0	0.3	4	8	50	2	1	●
OMPQ-2R-030R0.5S	3.0	0.5	4	8	50	2	1	●
OMPQ-2R-040R0.2S	4.0	0.2	4	11	50	2	2	●
OMPQ-2R-040R0.3S	4.0	0.3	4	11	50	2	2	●
OMPQ-2R-040R0.5S	4.0	0.5	4	11	50	2	2	●
OMPQ-2R-040R1.0S	4.0	1.0	4	11	50	2	2	●
OMPQ-2R-050R0.3	5.0	0.3	6	13	50	2	1	●
OMPQ-2R-050R0.5	5.0	0.5	6	13	50	2	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2R

## 2-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03
Corner Radius Tolerance ±0.02	

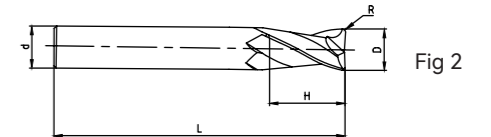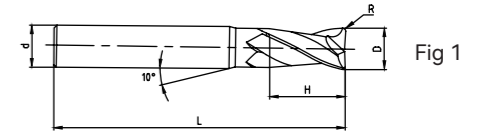

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-2R-050R1.0	5.0	1.0	6	13	50	2	1	●
OMPQ-2R-060R0.3	6.0	0.3	6	16	50	2	2	●
OMPQ-2R-060R0.5	6.0	0.5	6	16	50	2	2	●
OMPQ-2R-060R1.0	6.0	1.0	6	16	50	2	2	●
OMPQ-2R-080R0.3	8.0	0.3	8	20	60	2	2	●
OMPQ-2R-080R0.5	8.0	0.5	8	20	60	2	2	●
OMPQ-2R-080R1.0	8.0	1.0	8	20	60	2	2	●
OMPQ-2R-100R0.5	10.0	0.5	10	25	75	2	2	●
OMPQ-2R-100R1.0	10.0	1.0	10	25	75	2	2	●
OMPQ-2R-100R1.5	10.0	1.5	10	25	75	2	2	●
OMPQ-2R-100R2.0	10.0	2.0	10	25	75	2	2	●
OMPQ-2R-120R0.5	12.0	0.5	12	30	75	2	2	●
OMPQ-2R-120R1.0	12.0	1.0	12	30	75	2	2	●
OMPQ-2R-120R1.5	12.0	1.5	12	30	75	2	2	●
OMPQ-2R-120R2.0	12.0	2.0	12	30	75	2	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMPQ-2RH

## 2-Flute Long Straight Shank Corner Radius End Mills

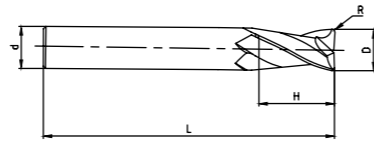

### Diameter Tolerance:


D6~D12	0,-0.025
Corner Radius Tolerance ±0.02	

Type	Basic Dimension (mm)					Number of flute	Stock
	D	R	d	H	L	Z	
OMPQ-2R-060R0.5H	6.0	0.5	6	16	75	2	●
OMPQ-2R-060R1.0H	6.0	1.0	6	16	75	2	●
OMPQ-2R-100R0.5H	10.0	0.5	10	25	100	2	●
OMPQ-2R-100R1.0H	10.0	1.0	10	25	100	2	●
OMPQ-2R-100R2.0H	10.0	2.0	10	25	100	2	●
OMPQ-2R-120R0.5H	12.0	0.5	12	30	100	2	●
OMPQ-2R-120R1.0H	12.0	1.0	12	30	100	2	●
OMPQ-2R-120R2.0H	12.0	2.0	12	30	100	2	●

● Stock Available ▲ Make-to-order

# OMPQ-2RG

## 2-Flute Extra Long Straight Shank Corner Radius End Mills

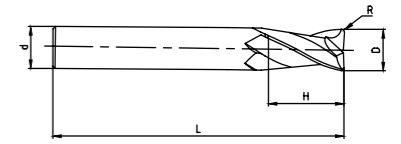

### Diameter Tolerance:

D8~D12	0,-0.025
Corner Radius Tolerance ±0.02	

Type	Basic Dimension (mm)					Number of flute	Stock
	D	R	d	H	L	Z	
OMPQ-2R-080R0.5G	8.0	0.5	8	20	100	2	●
OMPQ-2R-080R1.0G	8.0	1.0	8	20	100	2	●
OMPQ-2R-100R0.5G	10.0	0.5	10	25	150	2	●
OMPQ-2R-100R1.0G	10.0	1.0	10	25	150	2	●
OMPQ-2R-100R2.0G	10.0	2.0	10	25	150	2	●
OMPQ-2R-120R0.5G	12.0	0.5	12	30	150	2	●
OMPQ-2R-120R1.0G	12.0	1.0	12	30	150	2	●
OMPQ-2R-120R2.0G	12.0	2.0	12	30	150	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-2R/2RH/2RG Cutting Parameters												
Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel · Alloy Steel ~750N/mm		Carbon Steel · Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	800	40000	800	38000	700	32000	320	22300	200	25000	275
2	24000	900	24000	900	19000	760	16000	400	11150	230	13000	275
3	15500	950	15500	950	12750	760	10600	450	7400	290	8500	280
4	11500	950	11500	950	9550	760	8000	550	5550	370	6500	370
5	9500	1050	9500	1050	7650	800	6400	550	4450	370	5000	375
6	8000	1050	8000	1050	6400	800	5300	580	3700	390	4200	390
8	6000	1300	6000	1300	4800	950	4000	700	2750	455	3200	440
10	4800	1200	4800	1200	3800	900	3200	650	2200	430	2500	440
12	4000	1100	4000	1100	3200	840	2650	610	1850	430	2100	420

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.


## OMPQ-3R

### 3-Flute Straight Shank Corner Radius End Mills



#### Diameter Tolerance:

D3~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03
Corner Radius Tolerance ±0.02	

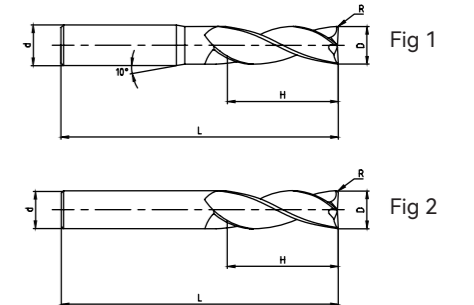

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-3R-030R0.2S	3.0	0.2	4	8	50	3	1	●
OMPQ-3R-030R0.3S	3.0	0.3	4	8	50	3	1	●
OMPQ-3R-030R0.5S	3.0	0.5	4	8	50	3	1	●
OMPQ-3R-040R0.2S	4.0	0.2	4	10	50	3	2	●
OMPQ-3R-040R0.3S	4.0	0.3	4	10	50	3	2	●
OMPQ-3R-040R0.5S	4.0	0.5	4	10	50	3	2	●
OMPQ-3R-050R0.3	5.0	0.3	6	13	50	3	1	●
OMPQ-3R-050R0.5	5.0	0.5	6	13	50	3	1	●
OMPQ-3R-050R1.0	5.0	1.0	6	13	50	3	1	●
OMPQ-3R-060R0.3	6.0	0.3	6	16	50	3	2	●
OMPQ-3R-060R0.5	6.0	0.5	6	16	50	3	2	●
OMPQ-3R-060R1.0	6.0	1.0	6	16	50	3	2	●
OMPQ-3R-080R0.3	8.0	0.3	8	20	60	3	2	●
OMPQ-3R-080R0.5	8.0	0.5	8	20	60	3	2	●
OMPQ-3R-080R1.0	8.0	1.0	8	20	60	3	2	●
OMPQ-3R-100R0.5	10.0	0.5	10	25	75	3	2	●
OMPQ-3R-100R1.0	10.0	1.0	10	25	75	3	2	●
OMPQ-3R-100R2.0	10.0	2.0	10	25	75	3	2	●
OMPQ-3R-120R0.5	12.0	0.5	12	30	75	3	2	●
OMPQ-3R-120R1.0	12.0	1.0	12	30	75	3	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMPQ-3RH

## 3-Flute Long Straight Shank Corner Radius End Mills



### Diameter Tolerance:


D6~D12	0,-0.025
Corner Radius Tolerance ±0.02	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMPQ-3R-060R0.5H	6.0	0.5	6	16	75	3	●
OMPQ-3R-060R1.0H	6.0	1.0	6	16	75	3	●
OMPQ-3R-080R0.5H	8.0	0.5	8	20	75	3	●
OMPQ-3R-080R1.0H	8.0	1.0	8	20	75	3	●
OMPQ-3R-100R0.5H	10.0	0.5	10	25	100	3	●
OMPQ-3R-100R1.0H	10.0	1.0	10	25	100	3	●
OMPQ-3R-100R2.0H	10.0	2.0	10	25	100	3	●
OMPQ-3R-120R0.5H	12.0	0.5	12	30	100	3	●
OMPQ-3R-120R1.0H	12.0	1.0	12	30	100	3	●
OMPQ-3R-120R2.0H	12.0	2.0	12	30	100	3	●

● Stock Available ▲ Make-to-order

# OMPQ-3RG

## 3-Flute Straight Extra Long Shank Shank Corner Radius End Mills

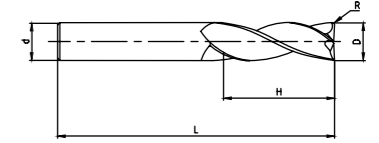

### Diameter Tolerance:

D8~D12	0,-0.025
Corner Radius Tolerance ±0.02	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMPQ-3R-080R0.5G	8.0	0.5	8	20	100	3	●
OMPQ-3R-080R1.0G	8.0	1.0	8	20	100	3	●
OMPQ-3R-100R0.5G	10.0	0.5	10	25	150	3	●
OMPQ-3R-100R1.0G	10.0	1.0	10	25	150	3	●
OMPQ-3R-100R2.0G	10.0	2.0	10	25	150	3	●
OMPQ-3R-120R0.5G	12.0	0.5	12	30	150	3	●
OMPQ-3R-120R1.0G	12.0	1.0	12	30	150	3	●
OMPQ-3R-120R2.0G	12.0	2.0	12	30	150	3	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-3R/3RH/3RG Cutting Parameters												
Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel·Alloy Steel ~750N/mm		Carbon Steel·Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
3	15500	950	15500	950	12750	760	10600	450	7400	290	8500	280
4	11500	950	11500	950	9550	760	8000	550	5550	370	6500	370
5	9500	1050	9500	1050	7650	800	6400	550	4450	370	5000	375
6	8000	1050	8000	1050	6400	800	5300	580	3700	390	4200	390
8	6000	1300	6000	1300	4800	950	4000	700	2750	455	3200	440
10	4800	1200	4800	1200	3800	900	3200	650	2200	430	2500	440
12	4000	1100	4000	1100	3200	840	2650	610	1850	430	2100	420


- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

## OMPQ-4R 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D7~D20	0,-0.025
Corner Radius Tolerance ±0.02	

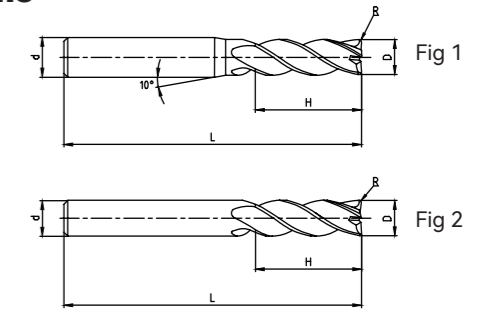

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-4R-010R0.2S	1.0	0.2	4	3	50	4	1	▲
OMPQ-4R-015R0.2S	1.5	0.2	4	4	50	4	1	▲
OMPQ-4R-020R0.2S	2.0	0.2	4	6	50	4	1	▲
OMPQ-4R-020R0.5S	2.0	0.5	4	6	50	4	1	▲
OMPQ-4R-025R0.2S	2.5	0.2	4	8	50	4	1	▲
OMPQ-4R-025R0.5S	2.5	0.5	4	8	50	4	1	▲
OMPQ-4R-030R0.2S	3.0	0.2	4	8	50	4	1	●
OMPQ-4R-030R0.5S	3.0	0.5	4	8	50	4	1	●
OMPQ-4R-040R0.2S	4.0	0.2	4	11	50	4	2	●
OMPQ-4R-040R0.3S	4.0	0.3	4	11	50	4	2	●
OMPQ-4R-040R0.5	4.0	0.5	6	11	50	4	1	●
OMPQ-4R-040R0.5S	4.0	0.5	4	11	50	4	2	●
OMPQ-4R-050R0.2	5.0	0.2	6	13	50	4	1	●
OMPQ-4R-050R0.5	5.0	0.5	6	13	50	4	1	●
OMPQ-4R-050R1.0	5.0	1.0	6	13	50	4	1	●
OMPQ-4R-060R0.2	6.0	0.2	6	16	50	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4R

## 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D7~D20	0,-0.025
Corner Radius Tolerance ±0.02	

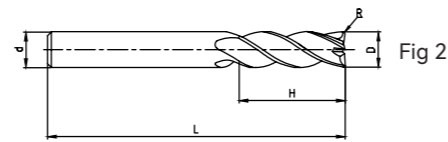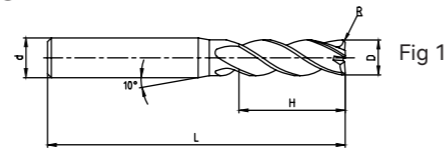

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-4R-060R0.3	6.0	0.3	6	16	50	4	2	●
OMPQ-4R-060R0.5	6.0	0.5	6	16	50	4	2	●
OMPQ-4R-060R1.0	6.0	1.0	6	16	50	4	2	●
OMPQ-4R-080R0.3	8.0	0.3	8	20	60	4	2	●
OMPQ-4R-080R0.5	8.0	0.5	8	20	60	4	2	●
OMPQ-4R-080R1.0	8.0	1.0	8	20	60	4	2	●
OMPQ-4R-080R2.0	8.0	2.0	8	20	60	4	2	●
OMPQ-4R-100R0.3	10.0	0.3	10	25	75	4	2	●
OMPQ-4R-100R0.5	10.0	0.5	10	25	75	4	2	●
OMPQ-4R-100R1.0	10.0	1.0	10	25	75	4	2	●
OMPQ-4R-100R2.0	10.0	2.0	10	25	75	4	2	●
OMPQ-4R-100R3.0	10.0	3.0	10	25	75	4	2	●
OMPQ-4R-120R0.3	12.0	0.3	12	30	75	4	2	●
OMPQ-4R-120R0.5	12.0	0.5	12	30	75	4	2	●
OMPQ-4R-120R1.0	12.0	1.0	12	30	75	4	2	●
OMPQ-4R-120R2.0	12.0	2.0	12	30	75	4	2	●
OMPQ-4R-120R3.0	12.0	3.0	12	30	75	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4RH

## 4-Flute Long Shank Corner Radius End Mills



### Diameter Tolerance:

D4~D6	0,-0.02
D7~D20	0,-0.025
Corner Radius Tolerance ±0.02	

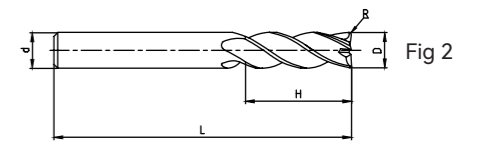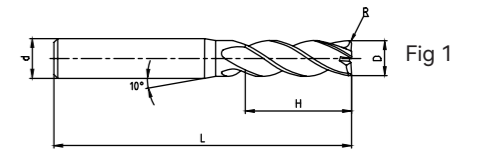

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-4R-040R0.2SH	4.0	0.2	4	11	75	4	2	●
OMPQ-4R-040R0.2H	4.0	0.2	6	11	75	4	1	●
OMPQ-4R-040R0.5SH	4.0	0.5	4	11	75	4	2	●
OMPQ-4R-040R0.5H	4.0	0.5	6	11	75	4	1	●
OMPQ-4R-060R0.2H	6.0	0.2	6	16	75	4	2	●
OMPQ-4R-060R0.5H	6.0	0.5	6	16	75	4	2	●
OMPQ-4R-060R1.0H	6.0	1.0	6	16	75	4	2	●
OMPQ-4R-080R0.2H	8.0	0.2	8	20	75	4	2	●
OMPQ-4R-080R0.5H	8.0	0.5	8	20	75	4	2	●
OMPQ-4R-080R1.0H	8.0	1.0	8	20	75	4	2	●
OMPQ-4R-100R0.2H	10.0	0.2	10	25	100	4	2	●
OMPQ-4R-100R0.5H	10.0	0.5	10	25	100	4	2	●
OMPQ-4R-100R1.0H	10.0	1.0	10	25	100	4	2	●
OMPQ-4R-100R2.0H	10.0	2.0	10	25	100	4	2	●
OMPQ-4R-120R0.2H	12.0	0.2	12	30	100	4	2	●
OMPQ-4R-120R0.5H	12.0	0.5	12	30	100	4	2	●
OMPQ-4R-120R1.0H	12.0	1.0	12	30	100	4	2	●
OMPQ-4R-120R2.0H	12.0	2.0	12	30	100	4	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMPQ-4RG

## 4-Flute Straight Extra Long Shank Shank Corner Radius End Mills

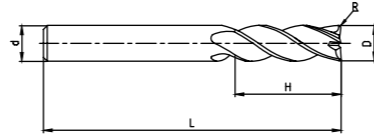

### Diameter Tolerance:

D6	0,-0.02
D7~D12	0,-0.025
Corner Radius Tolerance ±0.02	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMPQ-4R-060R0.2G	6.0	0.2	6	16	100	4	●
OMPQ-4R-060R0.5G	6.0	0.5	6	16	100	4	●
OMPQ-4R-060R1.0G	6.0	1.0	6	16	100	4	●
OMPQ-4R-080R0.2G	8.0	0.2	8	20	100	4	●
OMPQ-4R-080R0.5G	8.0	0.5	8	20	100	4	●
OMPQ-4R-080R1.0G	8.0	1.0	8	20	100	4	●
OMPQ-4R-100R0.2G	10.0	0.2	10	25	150	4	●
OMPQ-4R-100R0.5G	10.0	0.5	10	25	150	4	●
OMPQ-4R-100R1.0G	10.0	1.0	10	25	150	4	●
OMPQ-4R-100R2.0G	10.0	2.0	10	25	150	4	●
OMPQ-4R-120R0.2G	12.0	0.2	12	30	150	4	●
OMPQ-4R-120R0.5G	12.0	0.5	12	30	150	4	●
OMPQ-4R-120R1.0G	12.0	1.0	12	30	150	4	●
OMPQ-4R-120R2.0G	12.0	2.0	12	30	150	4	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○			○	●				

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-4RH/4RG Cutting Parameters

Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel · Alloy Steel ~750N/mm		Carbon Steel · Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
4	10800	840	10800	840	10000	770	8000	640	5500	145	6500	500
5	8200	880	8200	880	7600	810	6400	670	4500	145	5000	530
6	7000	900	7000	900	6400	830	5300	690	3700	160	4200	540
8	5200	890	5200	890	4800	815	4000	680	2800	160	3200	550
10	4200	880	4200	880	3800	810	3200	670	2200	160	2500	520
12	3500	880	3500	880	3200	810	2650	670	1850	160	2100	520

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.



# OMPQ-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D	0,-0.02
Corner Radius Tolerance ±0.005	

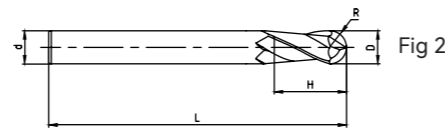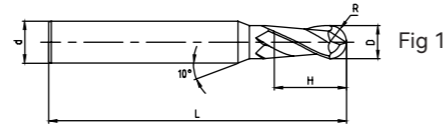

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-2B-010R0.5S	1.0	0.5	4	2	50	2	1	▲
OMPQ-2B-010R0.5	1.0	0.5	6	2	50	2	1	▲
OMPQ-2B-015R0.75S	1.5	0.75	4	3	50	2	1	▲
OMPQ-2B-015R0.75	1.5	0.75	6	3	50	2	1	▲
OMPQ-2B-020R1.0F	2.0	1.0	3	4	50	2	1	▲
OMPQ-2B-020R1.0S	2.0	1.0	4	4	50	2	1	▲
OMPQ-2B-020R1.0	2.0	1.0	6	4	50	2	1	▲
OMPQ-2B-025R1.25F	2.5	1.25	3	5	50	2	1	▲
OMPQ-2B-025R1.25S	2.5	1.25	4	5	50	2	1	▲
OMPQ-2B-025R1.25	2.5	1.25	6	5	50	2	1	▲
OMPQ-2B-030R1.5F	3.0	1.5	3	6	50	2	2	▲
OMPQ-2B-030R1.5S	3.0	1.5	4	6	50	2	1	●
OMPQ-2B-030R1.5	3.0	1.5	6	6	50	2	1	●
OMPQ-2B-035R1.75S	3.5	1.75	4	8	50	2	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D	0,-0.02
Corner Radius Tolerance ±0.005	

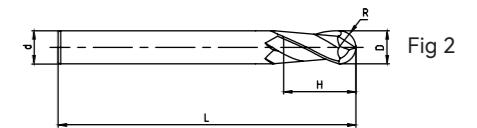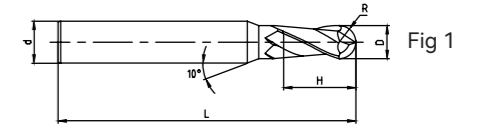

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-2B-035R1.75	3.5	1.75	6	8	50	2	1	●
OMPQ-2B-040R2.0S	4.0	2.0	4	8	50	2	2	●
OMPQ-2B-040R2.0	4.0	2.0	6	8	50	2	1	●
OMPQ-2B-050R2.5	5.0	2.5	6	10	50	2	1	●
OMPQ-2B-055R2.75	5.5	2.75	6	12	50	2	1	●
OMPQ-2B-060R3.0	6.0	3.0	6	12	50	2	2	●
OMPQ-2B-070R3.5	7.0	3.5	8	14	60	2	1	●
OMPQ-2B-080R4.0	8.0	4.0	8	16	60	2	2	●
OMPQ-2B-090R4.5	9.0	4.5	10	18	75	2	1	●
OMPQ-2B-100R5.0	10.0	5.0	10	20	75	2	2	●
OMPQ-2B-120R6.0	12.0	6.0	12	24	75	2	2	●
OMPQ-2B-140R7.0	14.0	7.0	14	28	75	2	2	●
OMPQ-2B-160R8.0	16.0	8.0	16	32	100	2	2	●
OMPQ-2B-200R10.0	20.0	10.0	20	40	100	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2BH/G

## 2-Flute Long Shank/Extra Long Shank Ball Nose End Mills



### Diameter Tolerance:

D	0,-0.02
Corner Radius Tolerance ±0.005	



Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-2B-020R1.0SH	2.0	1.0	4	4	75	2	1	●
OMPQ-2B-020R1.0H	2.0	1.0	6	4	75	2	1	●
OMPQ-2B-025R1.25SH	2.5	1.25	4	5	75	2	1	●
OMPQ-2B-025R1.25H	2.5	1.25	6	5	75	2	1	●
OMPQ-2B-030R1.5SH	3.0	1.5	4	6	75	2	1	●
OMPQ-2B-030R1.5H	3.0	1.5	6	6	75	2	1	●
OMPQ-2B-035R1.75SH	3.5	1.75	4	8	75	2	1	●
OMPQ-2B-035R1.75H	3.5	1.75	6	8	75	2	1	●
OMPQ-2B-040R2.0SH	4.0	2.0	4	8	75	2	2	●
OMPQ-2B-040R2.0H	4.0	2.0	6	8	75	2	1	●
OMPQ-2B-050R2.5H	5.0	2.5	6	10	75	2	1	●
OMPQ-2B-055R2.75H	5.5	2.75	6	12	75	2	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-2BH/G

## 2-Flute Long Shank/Extra Long Shank Ball Nose End Mills



### Diameter Tolerance:

D	0,-0.02
Corner Radius Tolerance ±0.005	



Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-2B-060R3.0H	6.0	3.0	6	12	75	2	2	●
OMPQ-2B-060R3.0G	6.0	3.0	6	12	100	2	2	●
OMPQ-2B-070R3.5H	7.0	3.5	8	14	75	2	1	●
OMPQ-2B-080R4.0H	8.0	4.0	8	16	75	2	2	●
OMPQ-2B-080R4.0G	8.0	4.0	8	16	100	2	2	●
OMPQ-2B-090R4.5H	9.0	4.5	10	18	100	2	1	●
OMPQ-2B-100R5.0H	10.0	5.0	10	20	100	2	2	●
OMPQ-2B-100R5.0G	10.0	5.0	10	20	150	2	2	●
OMPQ-2B-120R6.0H	12.0	6.0	12	24	100	2	2	●
OMPQ-2B-120R6.0G	12.0	6.0	12	24	150	2	2	●
OMPQ-2B-140R7.0H	14.0	7.0	14	28	100	2	2	●
OMPQ-2B-160R8.0H	16.0	8.0	16	32	150	2	2	●
OMPQ-2B-200R10.0H	20.0	10.0	20	40	150	2	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-2B/2BH/2BG Cutting Parameters

Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel · Alloy Steel ~750N/mm		Carbon Steel · Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
0.5	40000	800	40000	800	38000	700	32000	320	22300	200	25000	275
1	24000	900	24000	900	19000	760	16000	400	11150	230	13000	275
1.5	15500	950	15500	950	12750	760	10600	450	7400	290	8500	280
2	11500	950	11500	950	9550	760	8000	550	5500	370	6500	370
2.5	9500	1050	9500	1050	7650	800	6400	550	4450	370	5000	375
3	8000	1050	8000	1050	6400	800	5300	580	3700	390	4200	390
4	6000	1300	6000	1300	4800	950	4000	700	2750	455	3200	440
5	4800	1200	4800	1200	3800	900	3200	650	2200	430	2500	440
6	4000	1100	4000	1100	3200	840	2650	610	1850	430	2100	420
8	3000	1050	3000	1050	2400	800	2000	600	1350	380	1600	375
10	2400	950	2400	950	1900	680	1600	560	1100	370	1250	330

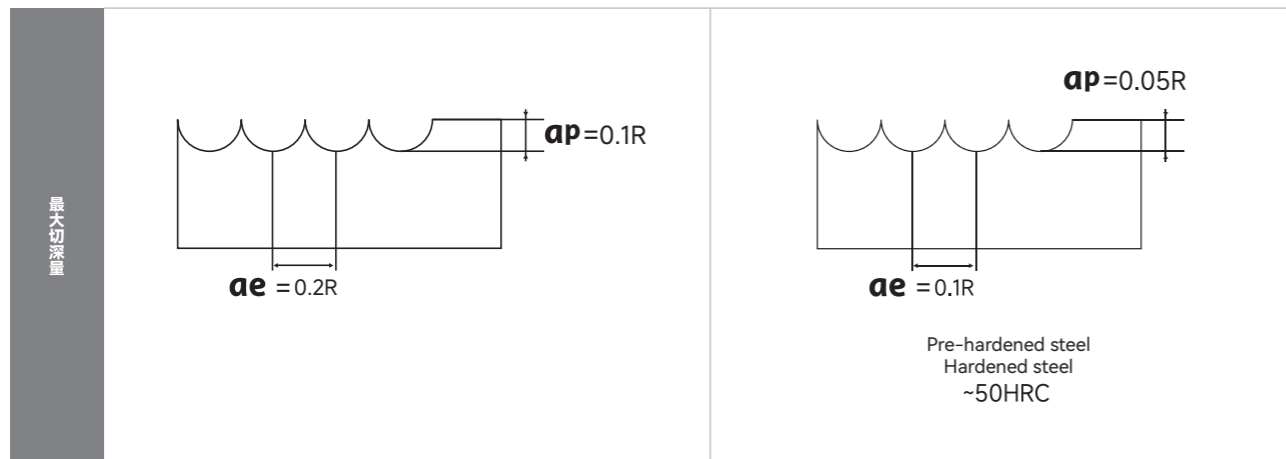

- Please select high-precision machine and tool holder.
- Please use air cooling or liquid cooling (Smoke-resistant cutting fluid).
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.


## OMPQ-4B

### 4-Flute Straight Shank Ball Nose End Mills



#### Diameter Tolerance:

D3~D20	0,-0.02
Corner Radius Tolerance ±0.005	

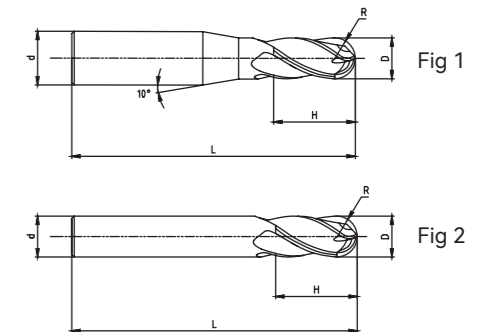

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-4B-030R1.5	3.0	1.5	6	6	50	4	1	●
OMPQ-4B-040R2.0	4.0	2.0	6	8	50	4	1	●
OMPQ-4B-050R2.5	5.0	2.5	6	10	50	4	1	●
OMPQ-4B-060R3.0	6.0	3.0	6	12	50	4	2	●
OMPQ-4B-080R4.0	8.0	4.0	8	16	60	4	2	●
OMPQ-4B-100R5.0	10.0	5.0	10	20	75	4	2	●
OMPQ-4B-120R6.0	12.0	6.0	12	24	75	4	2	●
OMPQ-4B-140R7.0	14.0	7.0	14	28	75	4	2	●
OMPQ-4B-160R8.0	16.0	8.0	16	32	100	4	2	●
OMPQ-4B-180R9.0	18.0	9.0	18	36	100	4	2	●
OMPQ-4B-200R10.0	20.0	10.0	20	40	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPQ-4BL

## 4-Flute Ball Nose End Mills With Straight Shank And Long Cutting Edge



### Diameter Tolerance:

D3~D20	0,-0.02
Corner Radius Tolerance ±0,005	

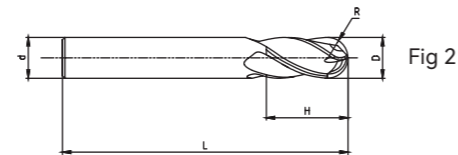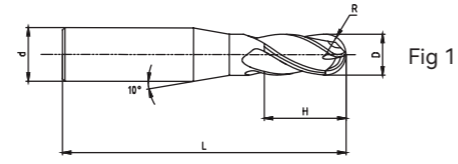

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMPQ-4B-030R1.5L	3.0	1.5	6	6	75	4	1	●
OMPQ-4B-040R2.0L	4.0	2.0	6	8	75	4	1	●
OMPQ-4B-050R2.5L	5.0	2.5	6	10	75	4	1	●
OMPQ-4B-060R3.0L	6.0	3.0	6	12	75	4	2	●
OMPQ-4B-080R4.0L	8.0	4.0	8	16	100	4	2	●
OMPQ-4B-100R5.0L	10.0	5.0	10	20	100	4	2	●
OMPQ-4B-120R6.0L	12.0	6.0	12	24	100	4	2	●
OMPQ-4B-140R7.0L	14.0	7.0	14	28	100	4	2	●
OMPQ-4B-160R8.0L	16.0	8.0	16	32	150	4	2	●
OMPQ-4B-180R9.0L	18.0	9.0	18	36	150	4	2	●
OMPQ-4B-200R10.0L	20.0	10.0	20	40	150	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	○		○	●					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPQ-4B/4BL Cutting Parameters


Workpiece Material	Cast Iron Nodular Cast Iron		Carbon Steel · Alloy Steel ~750N/mm		Carbon Steel · Alloy Steel ~30HRC		Pre-hardened steel Hardened steel ~40HRC		Stainless Steel		Pre-hardened steel Hardened steel ~50HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1.5	14000	680	14000	680	13000	630	10600	525	7500	120	8500	410
2	10800	700	10800	700	10000	640	8000	535	5500	125	6500	420
2.5	8200	730	8200	730	7600	670	6400	560	4500	125	5000	440
3	7000	750	7000	750	6400	690	5300	575	3700	135	4200	450
4	5200	740	5200	740	4800	680	4000	565	2800	135	3200	460
5	4200	730	4200	730	3800	670	3200	560	2200	135	2500	435
6	3500	730	3500	730	3200	670	2650	560	1850	135	2100	435
8	2600	680	2600	680	2400	630	2000	525	1400	120	1600	410
10	2050	670	2050	670	1900	620	1600	515	1100	105	1250	405

- Please select high-precision machine and tool holder.
- Please use air cooling or liquid cooling (Smoke-resistant cutting fluid).
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

# OMPX



## SERIES FOR HIGH-PERFORMANCE MACHINING

PRODUCT SERIES




**Unequal helix angle**  
Disperse cutting force, reduce tool vibration and improve cutting stability. Improve cutting shape and size, prevent chip accumulation, improve machining efficiency and workpiece surface finish.

**Biplane clearance angle**  
Reduce cutting force, effectively reduce heat generation and tool wear. Improve the cutting accuracy and make the workpiece surface smoother and more accurate.



**Unequal**  
Significantly reduce the vibration and noise in the cutting process and improve the surface finish. The load borne by each tooth is more uniform, which effectively prolongs the service life of the milling cutter.



**Substrate&coating**  
Ultra-fine grain (0.4μm) tungsten carbide+bonding phase substrate has excellent wear resistance and extremely high bending strength. AlCrSiN nano-composite coating with better wear resistance and high temperature resistance.

### PROCESSING CASE

MACHINING PARTS		CUTTING CONDITIONS		
	WORKPIECE	Woodworking Tools	CUTTING SPEED	2500
	TOOL TYPE	OMPX-4E-100	FEED SPEED	400
		Foreign company A	AP	5
	WORKPIECE MATERIALS	40Cd (HRC20+)	AE	10
		COOLING METHOD	External cooling Cutting fluid	

CUTTING RESULTS	
Customer's processing time is reduced from 21 hours to 10.5 hours with a 100% efficiency increase.	



# OMPX-4E

## 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.015
D7~D20	0,-0.02

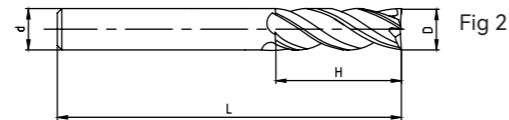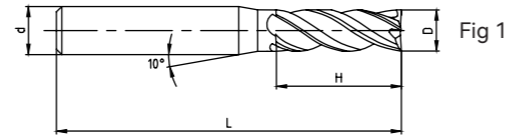

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPX-4E-010S	1.0	4	3	50	4	1	●
OMPX-4E-015S	1.5	4	4	50	4	1	●
OMPX-4E-020S	2.0	4	6	50	4	1	●
OMPX-4E-025S	2.5	4	8	50	4	1	●
OMPX-4E-030S	3.0	4	8	50	4	1	●
OMPX-4E-025	2.5	6	8	50	4	1	●
OMPX-4E-030	3.0	6	8	50	4	1	●
OMPX-4E-035S	3.5	4	10	50	4	1	●
OMPX-4E-040S	4.0	4	11	50	4	2	●
OMPX-4E-035	3.5	6	10	50	4	1	●
OMPX-4E-040	4.0	6	11	50	4	1	●
OMPX-4E-045	4.5	6	11	50	4	1	●
OMPX-4E-050	5.0	6	13	50	4	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-4E

## 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.015
D7~D20	0,-0.02

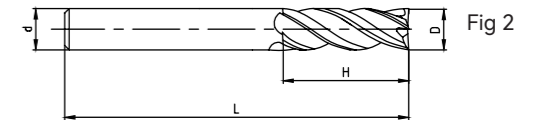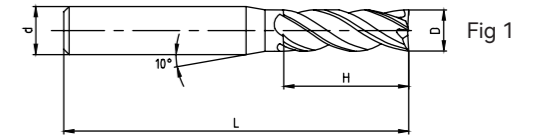

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPX-4E-055	5.5	6	16	50	4	1	●
OMPX-4E-060	6.0	6	16	50	4	2	●
OMPX-4E-070	7.0	8	20	60	4	1	●
OMPX-4E-080	8.0	8	20	60	4	2	●
OMPX-4E-090	9.0	10	22	75	4	1	●
OMPX-4E-100	10.0	10	25	75	4	2	●
OMPX-4E-110	11.0	12	26	75	4	1	●
OMPX-4E-120	12.0	12	30	75	4	2	●
OMPX-4E-140	14.0	14	32	75	4	2	●
OMPX-4E-160	16.0	16	45	100	4	2	●
OMPX-4E-180	18.0	18	45	100	4	2	●
OMPX-4E-200	20.0	20	45	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



## OMPX-4EL

### 4-Flute Straight Shank Flat End Mills with Long Cutting Edge



#### Diameter Tolerance:

D3~D6	0,-0.015
D7~D20	0,-0.02

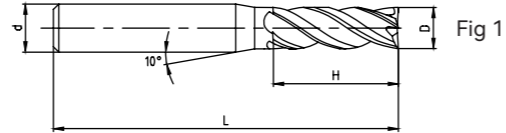

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPX-4E-030L	3.0	6	12	75	4	1	●
OMPX-4E-040L	4.0	6	15	75	4	1	●
OMPX-4E-050L	5.0	6	20	75	4	1	●
OMPX-4E-060L	6.0	6	20	75	4	2	●
OMPX-4E-080L	8.0	8	25	100	4	2	●
OMPX-4E-100L	10.0	10	30	100	4	2	●
OMPX-4E-120L	12.0	12	35	100	4	2	●
OMPX-4E-140L	14.0	14	40	100	4	2	●
OMPX-4E-160L	16.0	16	50	150	4	2	●
OMPX-4E-200L	20.0	20	55	150	4	2	●

● Stock Available ▲ Make-to-order



## OMPX-4EH

### 4-Flute Long Shank Flat End Mills



#### Diameter Tolerance:

D3~D6	0,-0.015
D7~D12	0,-0.02

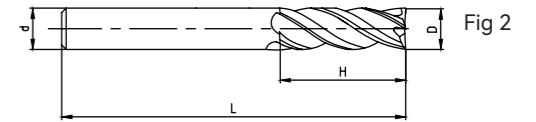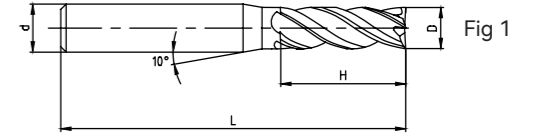

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMPX-4E-030SH	3.0	4	8	75	4	1	●
OMPX-4E-030H	3.0	6	8	75	4	1	●
OMPX-4E-040SH	4.0	4	11	75	4	2	●
OMPX-4E-040H	4.0	6	11	75	4	1	●
OMPX-4E-050H	5.0	6	13	75	4	1	●
OMPX-4E-060H	6.0	6	16	75	4	2	●
OMPX-4E-080H	8.0	8	20	75	4	2	●
OMPX-4E-100H	10.0	10	25	100	4	2	●
OMPX-4E-120H	12.0	12	30	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMPX-4EG

## 4-Flute Extra Long Shank Flat End Mills

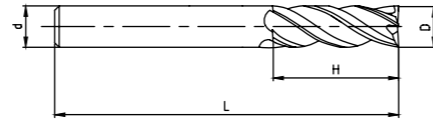

### Diameter Tolerance:

D6	0,-0.015
D7~D12	0,-0.02

Type	Basic Dimension (mm)				Number of flute	Stock
	D	d	H	L	Z	
OMPX-4E-060G	6.0	6	16	100	4	●
OMPX-4E-080G	8.0	8	20	100	4	●
OMPX-4E-100G	10.0	10	25	150	4	●
OMPX-4E-120G	12.0	12	30	150	4	●

● Stock Available ▲ Make-to-order

OMPX-4E/4EL/4EH/4EG Cutting Parameters										
Workpiece Material	Cast iron·Carbon Steel·Alloy Steel ~30HRC		Stainless Steel		Pre-hardened steel Hardened steel ~40HRC		Pre-hardened steel Hardened steel ~50HRC		Quenched steel ~55HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	20000	300	20000	108	20000	240	20000	180	20000	135
2	15000	480	11500	120	15000	420	13000	270	11140	195
3	14000	815	7500	145	10600	630	8500	495	7430	360
4	10800	840	5500	150	8000	645	6500	505	5570	370
5	8200	875	4500	150	6400	675	5000	530	4460	390
6	7000	900	3700	165	5300	690	4200	540	3710	390
8	5200	890	2800	165	4000	680	3200	555	2785	405
10	4200	875	2200	165	3200	675	2500	525	2230	375
12	3500	875	1850	165	2650	675	2100	525	1855	375
14	3000	815	1600	150	2300	630	1800	495	1590	360
16	2600	815	1400	145	2000	630	1600	495	1390	360
18	2300	805	1250	125	1800	620	1400	485	1240	350
20	2050	805	1100	125	1600	620	1250	485	1115	350

ae = 0.1DC  
ap = 1.5DC

ae = 0.05DC  
ap = 1.5DC

ae = 0.03DC  
ap = 1.5DC

**Max Cutting Depth**

Tool diameter	Cutting depth (ap)
Φ1<DC<Φ3	0.15DC
Φ3<DC<Φ6	0.3DC
Φ6<DC<Φ20	0.5DC

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.



# OMPX-4R

## 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.15
D7~D20	0,-0.02
Corner Radius Tolerance ±0.01	

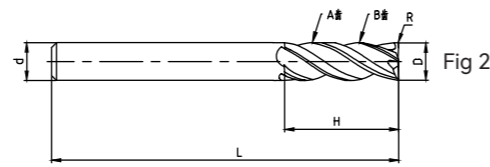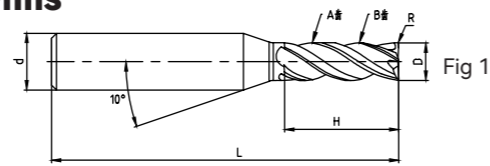

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-4R-010R0.2S	1.0	0.2	3	50	4	4	1	▲
OMPX-4R-015R0.2S	1.5	0.2	4	50	4	4	1	▲
OMPX-4R-020R0.2S	2.0	0.2	6	50	4	4	1	▲
OMPX-4R-020R0.2	2.0	0.2	6	50	6	4	1	▲
OMPX-4R-020R0.5S	2.0	0.5	6	50	4	4	1	▲
OMPX-4R-020R0.5	2.0	0.5	6	50	6	4	1	▲
OMPX-4R-025R0.2S	2.5	0.2	8	50	4	4	1	▲
OMPX-4R-025R0.2	2.5	0.2	8	50	6	4	1	▲
OMPX-4R-025R0.5S	2.5	0.5	8	50	4	4	1	▲
OMPX-4R-025R0.5	2.5	0.5	8	50	6	4	1	▲
OMPX-4R-030R0.2S	3.0	0.2	8	50	4	4	1	●
OMPX-4R-030R0.2	3.0	0.2	8	50	6	4	1	●
OMPX-4R-030R0.5S	3.0	0.5	8	50	4	4	1	●
OMPX-4R-030R0.5	3.0	0.5	8	50	6	4	1	●
OMPX-4R-040R0.2S	4.0	0.2	11	50	4	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-4R

## 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.015
D7~D20	0,-0.02
Corner Radius Tolerance ±0.01	

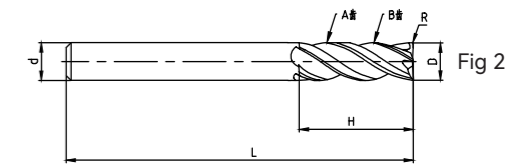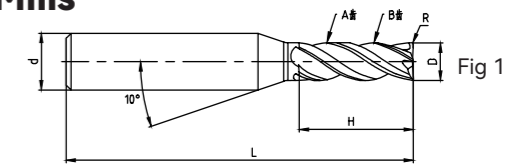

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-4R-040R0.2	4.0	0.2	11	50	6	4	1	●
OMPX-4R-040R0.3S	4.0	0.3	11	50	4	4	2	●
OMPX-4R-040R0.3	4.0	0.3	11	50	6	4	1	●
OMPX-4R-040R0.5S	4.0	0.5	11	50	4	4	1	●
OMPX-4R-040R0.5	4.0	0.5	11	50	6	4	1	●
OMPX-4R-050R0.2	5.0	0.2	13	50	6	4	1	●
OMPX-4R-050R0.3	5.0	0.3	13	50	6	4	1	●
OMPX-4R-050R0.5	5.0	0.5	13	50	6	4	1	●
OMPX-4R-050R1.0	5.0	1.0	13	50	6	4	1	●
OMPX-4R-060R0.2	6.0	0.2	16	50	6	4	2	●
OMPX-4R-060R0.3	6.0	0.3	16	50	6	4	2	●
OMPX-4R-060R0.5	6.0	0.5	16	50	6	4	2	●
OMPX-4R-060R1.0	6.0	1.0	16	50	6	4	2	●
OMPX-4R-080R0.2	8.0	0.2	20	60	8	4	2	●
OMPX-4R-080R0.3	8.0	0.3	20	60	8	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-4R

## 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.015
D7~D20	0,-0.02
Corner Radius Tolerance ±0.01	

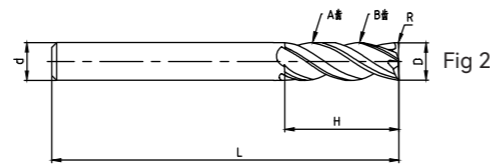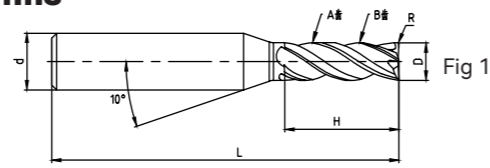

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-4R-080R0.5	8.0	0.5	20	60	8	4	2	●
OMPX-4R-080R1.0	8.0	1.0	20	60	8	4	2	●
OMPX-4R-100R0.2	10.0	0.2	25	75	10	4	2	●
OMPX-4R-100R0.3	10.0	0.3	25	75	10	4	2	●
OMPX-4R-100R0.5	10.0	0.5	25	75	10	4	2	●
OMPX-4R-100R1.0	10.0	1.0	25	75	10	4	2	●
OMPX-4R-100R2.0	10.0	2.0	25	75	10	4	2	●
OMPX-4R-100R3.0	10.0	3.0	25	75	10	4	2	●
OMPX-4R-120R0.2	12.0	0.2	30	75	12	4	2	●
OMPX-4R-120R0.3	12.0	0.3	30	75	12	4	2	●
OMPX-4R-120R0.5	12.0	0.5	30	75	12	4	2	●
OMPX-4R-120R1.0	12.0	1.0	30	75	12	4	2	●
OMPX-4R-120R2.0	12.0	2.0	30	75	12	4	2	●
OMPX-4R-120R3.0	12.0	3.0	30	75	12	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-4RH

## 4-Flute Long Shank Corner Radius End Mills



### Diameter Tolerance:

D4~D6	0,-0.015
D7~D12	0,-0.02
Corner Radius Tolerance ±0.01	

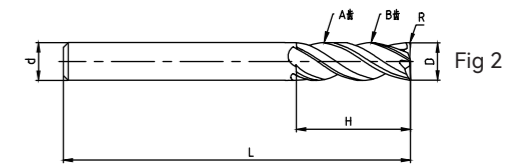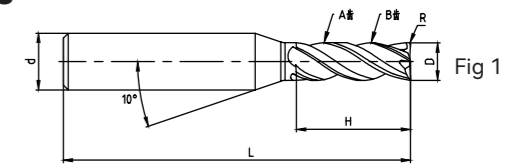

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-4R-040R0.2SH	4.0	0.2	10	75	4	4	2	▲
OMPX-4R-040R0.2H	4.0	0.2	10	75	6	4	1	▲
OMPX-4R-040R0.5SH	4.0	0.5	10	75	4	4	2	▲
OMPX-4R-040R0.5H	4.0	0.5	10	75	6	4	1	▲
OMPX-4R-060R0.2H	6.0	0.2	16	75	6	4	2	▲
OMPX-4R-060R0.5H	6.0	0.5	16	75	6	4	2	▲
OMPX-4R-060R1.0H	6.0	1.0	16	75	6	4	2	▲
OMPX-4R-080R0.2H	8.0	0.2	20	75	8	4	2	▲
OMPX-4R-080R0.5H	8.0	0.5	20	75	8	4	2	▲
OMPX-4R-080R1.0H	8.0	1.0	20	75	8	4	2	▲
OMPX-4R-100R0.2H	10.0	0.2	25	100	10	4	2	▲
OMPX-4R-100R0.5H	10.0	0.5	25	100	10	4	2	▲
OMPX-4R-100R1.0H	10.0	1.0	25	100	10	4	2	▲
OMPX-4R-100R2.0H	10.0	2.0	25	100	10	4	2	▲
OMPX-4R-120R0.2H	12.0	0.2	30	100	12	4	2	▲
OMPX-4R-120R0.5H	12.0	0.5	30	100	12	4	2	▲
OMPX-4R-120R1.0H	12.0	1.0	30	100	12	4	2	▲
OMPX-4R-120R2.0H	12.0	2.0	30	100	12	4	2	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC


# OMPX-4RG

## 4-Flute Extra Long Shank Corner Radius End Mills



### Diameter Tolerance:

D6	0,-0.015
D7~D12	0,-0.02
Corner Radius Tolerance ±0.01	

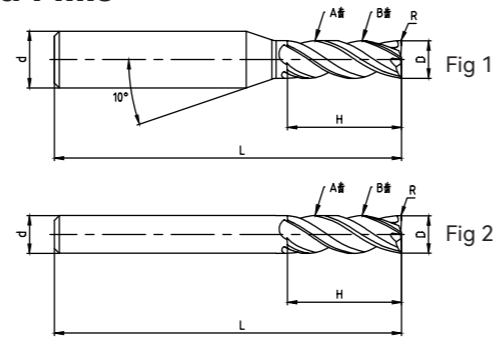

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-4R-060R0.2G	6.0	0.2	16	100	6	4	2	▲
OMPX-4R-060R0.5G	6.0	0.5	16	100	6	4	2	▲
OMPX-4R-060R1.0G	6.0	1.0	16	100	6	4	2	▲
OMPX-4R-080R0.2G	8.0	0.2	20	100	8	4	2	▲
OMPX-4R-080R0.5G	8.0	0.5	20	100	8	4	2	▲
OMPX-4R-080R1.0G	8.0	1.0	20	100	8	4	2	▲
OMPX-4R-100R0.2G	10.0	0.2	25	150	10	4	2	▲
OMPX-4R-100R0.5G	10.0	0.5	25	150	10	4	2	▲
OMPX-4R-100R1.0G	10.0	1.0	25	150	10	4	2	▲
OMPX-4R-100R2.0G	10.0	2.0	25	150	10	4	2	▲
OMPX-4R-120R0.2G	12.0	0.2	30	150	12	4	2	▲
OMPX-4R-120R0.5G	12.0	0.5	30	150	12	4	2	▲
OMPX-4R-120R1.0G	12.0	1.0	30	150	12	4	2	▲
OMPX-4R-120R2.0G	12.0	2.0	30	150	12	4	2	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC

OMPX-4R/4RH/4RG Cutting Parameters

Workpiece Material	Cast iron · Carbon Steel · Alloy Steel ~30HRC		Stainless Steel		Pre-hardened steel Hardened steel ~40HRC		Pre-hardened steel Hardened steel ~50HRC		Quenched steel ~55HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
3	14000	985	7500	175	10600	755	8500	590	7430	435
4	10800	1010	5500	175	8000	770	6500	600	5570	445
5	8200	1055	4500	175	6400	805	5000	640	4460	470
6	7000	1080	3700	195	5300	830	4200	650	3710	470
8	5200	1070	2800	195	4000	815	3200	660	2785	485
10	4200	1055	2200	195	3200	805	2500	625	2230	450
12	3500	1055	1850	195	2650	805	2100	625	1855	450
16	2600	985	1400	175	2000	755	1600	590	1390	435

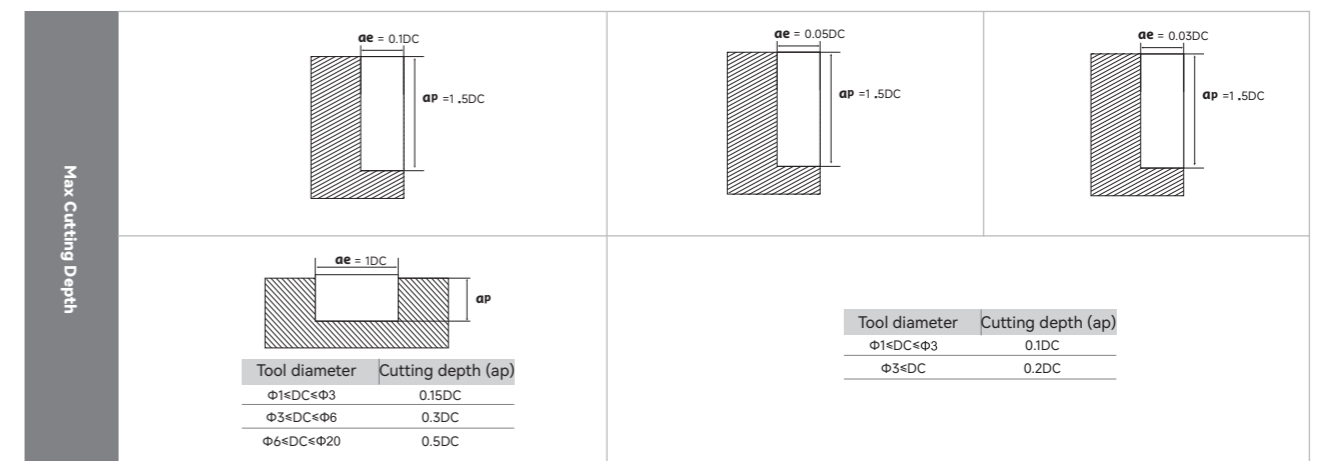

- The above table shows the standard value of side milling. When milling slot, 50%~70% of rotating speed and 40%~60% of feed speed stated above are recommended as standard.
- Please select high-precision machine and tool holder.
- Please use air blow or cutting liquid with high mist retardant property.
- Down milling is recommended in the case of side milling.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed speed stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.



# OMPX-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.005	

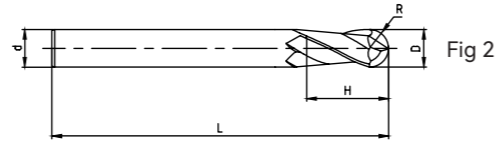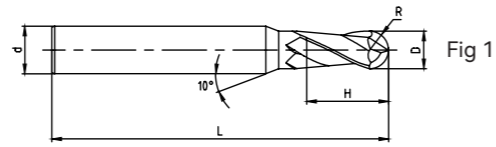

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-2B-010R0.5S	1.0	0.5	2	50	4	2	1	▲
OMPX-2B-010R0.5	1.0	0.5	2	50	6	2	1	▲
OMPX-2B-015R0.75S	1.5	0.75	3	50	4	2	1	▲
OMPX-2B-015R0.75	1.5	0.75	3	50	6	2	1	▲
OMPX-2B-020R1.0F	2.0	1.0	4	50	3	2	1	●
OMPX-2B-020R1.0S	2.0	1.0	4	50	4	2	1	●
OMPX-2B-020R1.0	2.0	1.0	4	50	6	2	1	●
OMPX-2B-025R1.25F	2.5	1.25	5	50	3	2	1	●
OMPX-2B-025R1.25S	2.5	1.25	5	50	4	2	1	●
OMPX-2B-025R1.25	2.5	1.25	5	50	6	2	1	●
OMPX-2B-030R1.5F	3.0	1.5	6	50	3	2	2	●
OMPX-2B-030R1.5S	3.0	1.5	6	50	4	2	1	●
OMPX-2B-030R1.5	3.0	1.5	6	50	6	2	1	●
OMPX-2B-035R1.75S	3.5	1.75	8	50	4	2	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		○	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.005	

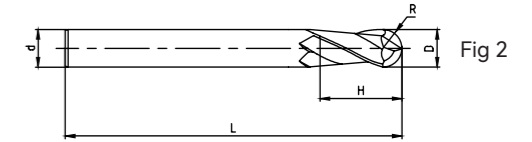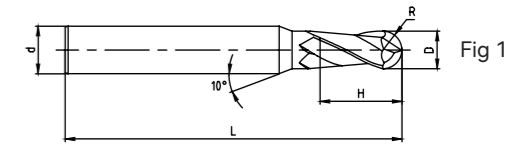

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-2B-035R1.75	3.5	1.75	8	50	6	2	1	●
OMPX-2B-040R2.0S	4.0	2.0	8	50	4	2	2	●
OMPX-2B-040R2.0	4.0	2.0	8	50	6	2	1	●
OMPX-2B-050R2.5	5.0	2.5	10	50	6	2	1	●
OMPX-2B-055R2.75	5.5	2.75	12	50	6	2	1	●
OMPX-2B-060R3.0	6.0	3.0	12	50	6	2	2	●
OMPX-2B-070R3.5	7.0	3.5	14	60	8	2	1	●
OMPX-2B-080R4.0	8.0	4.0	16	60	8	2	2	●
OMPX-2B-090R4.5	9.0	4.5	18	75	10	2	1	●
OMPX-2B-100R5.0	10.0	5.0	20	75	10	2	2	●
OMPX-2B-120R6.0	12.0	6.0	24	75	12	2	2	●
OMPX-2B-140R7.0	14.0	7.0	28	75	14	2	2	●
OMPX-2B-160R8.0	16.0	8.0	32	100	16	2	2	●
OMPX-2B-200R10.0	20.0	10.0	40	100	20	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		○	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-2BH

## 2-Flute Long Shank Ball Nose End Mills



### Diameter Tolerance:

D2~D20	0,-0.02
Corner Radius Tolerance ±0.005	

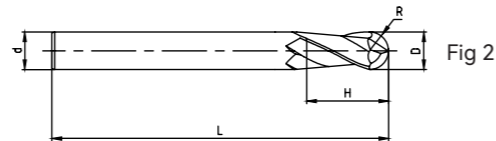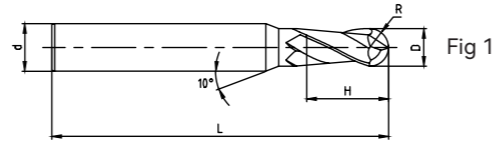

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-2B-020R1.0SH	2.0	1.0	4	75	4	2	1	▲
OMPX-2B-020R1.0H	2.0	1.0	4	75	6	2	1	▲
OMPX-2B-025R1.25SH	2.5	1.25	5	75	4	2	1	▲
OMPX-2B-025R1.25H	2.5	1.25	5	75	6	2	1	▲
OMPX-2B-030R1.5SH	3.0	1.5	6	75	4	2	1	▲
OMPX-2B-030R1.5H	3.0	1.5	6	75	6	2	1	▲
OMPX-2B-035R1.75SH	3.5	1.75	8	75	4	2	1	▲
OMPX-2B-035R1.75H	3.5	1.75	8	75	6	2	1	▲
OMPX-2B-040R2.0SH	4.0	2.0	8	75	4	2	2	▲
OMPX-2B-040R2.0H	4.0	2.0	8	75	6	2	1	▲
OMPX-2B-050R2.5H	5.0	2.5	10	75	6	2	1	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●	○	○	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-2BH

## 2-Flute Long Shank Ball Nose End Mills



### Diameter Tolerance:

D2~D20	0,-0.02
Corner Radius Tolerance ±0.005	

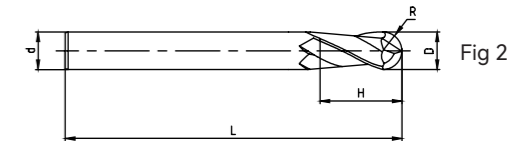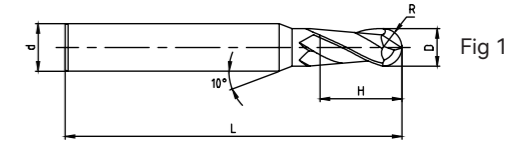

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-2B-055R2.75H	5.5	2.75	12	75	6	2	1	▲
OMPX-2B-060R3.0H	6.0	3.0	12	75	6	2	2	▲
OMPX-2B-070R3.5H	7.0	3.5	14	75	8	2	1	▲
OMPX-2B-080R4.0H	8.0	4.0	16	75	8	2	2	▲
OMPX-2B-090R4.5H	9.0	4.5	18	100	10	2	1	▲
OMPX-2B-100R5.0H	10.0	5.0	20	100	10	2	2	▲
OMPX-2B-120R6.0H	12.0	6.0	24	100	12	2	2	▲
OMPX-2B-140R7.0H	14.0	7.0	28	100	14	2	2	▲
OMPX-2B-160R8.0H	16.0	8.0	32	150	16	2	2	▲
OMPX-2B-200R10.0H	20.0	10.0	32	150	20	2	2	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●	○	○	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMPX-2BG

## 2-Flute Extra Long Shank Ball Nose End Mills



### Diameter Tolerance:

D6~D12	0,-0.02
Corner Radius Tolerance ±0.005	

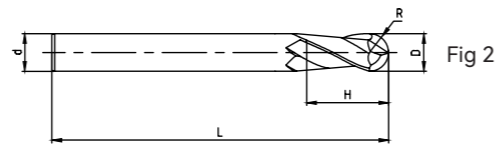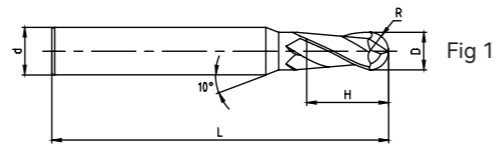

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	H	L	d			
OMPX-2B-060R3.0G	6.0	3.0	12	100	6	2	2	▲
OMPX-2B-080R4.0G	8.0	4.0	16	100	8	2	2	▲
OMPX-2B-100R5.0G	10.0	5.0	20	150	10	2	2	▲
OMPX-2B-120R6.0G	12.0	6.0	24	150	12	2	2	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●	○	○	●			○	○	

● Very Suitable ○ Suitable

Hardness unit: HRC


### OMPX-2B/2BG/2BH Cutting Parameters (General cutting)

Workpiece Material	Cast iron · Carbon Steel · Alloy Steel ~30HRC		Stainless Steel		Pre-hardened steel · Hardened steel ~40HRC		Pre-hardened steel · Hardened steel ~50HRC		Quenched steel ~55HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
R0.5	40000	960	22300	240	32000	385	25000	330	22280	295
R1.0	24000	1080	11150	275	16000	480	13000	330	11140	295
R1.5	15500	1150	7400	350	10600	545	8500	335	7430	295
R2.0	11500	1150	5550	445	8000	665	6500	450	5570	385
R2.5	9500	1270	4450	445	6400	665	5000	455	4455	405
R3.0	8000	1270	3700	470	5300	700	4200	470	3715	420
R4.0	6000	1575	2750	550	4000	850	3200	535	2785	465
R5.0	4800	1455	2200	520	3200	785	2500	535	2230	465
R6.0	4000	1330	1850	520	2650	740	2100	505	1855	450
R8.0	3000	1270	1350	455	2000	725	1600	455	1395	395
R10.0	2400	1150	1100	445	1600	675	1250	400	1115	360

### OMPX-2B/2BH Cutting Parameters (high speed cutting)

Workpiece Material	Cast iron · Carbon Steel · Alloy Steel ~30HRC		Stainless Steel		Pre-hardened steel · Hardened steel ~40HRC		Pre-hardened steel · Hardened steel ~50HRC		Quenched steel ~55HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
R3.0	15000	4800	11500	2750	9500	2250	7960	1885	6370	1510
R4.0	11500	3650	8950	2100	7150	1700	5970	1420	4775	1135
R5.0	9500	3000	7150	1700	5700	1350	4775	1130	3820	905
R6.0	7950	2500	5950	1400	4750	1100	3980	920	3180	735
R8.0	5950	1900	4450	1050	3550	850	2985	760	2390	610
R10.0	4750	1500	3550	850	2850	680	2390	570	1910	455

Max Cutting Depth

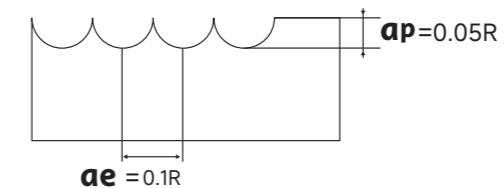

- Please select high-precision machine and tool holder.
- Please use air cooling or liquid cooling (Smoke-resistant cutting fluid).
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Make overhang of tool as short as possible in conditions of non-interference.

# OMH

## SERIES FOR QUENCHED STEEL MACHINING

PRODUCT SERIES

**Large helix**  
45° helix angle design with larger tool lead, It can increase tool wear resistance while reducing cutting force during cutting and improve processing efficiency and workpiece surface quality.

**Large core body**  
Large core body design, It ensures the tool has sufficient rigidity during cutting.

**High-performance coating**  
Light grey high-hardness coating, Uniform coating thickness and smooth surface, Few residual droplets on the tool surface and good stability

**Reasonable butterfly angle**  
Reasonable butterfly angle design and unique end face grinding process, The end milling effect is more prominent and stable, It can effectively solve the generation of ring lines during end milling.


**Cutting edge passivation process**  
Use precision sandblasting passivation machine to blunt the cutting edge into an arc shape, greatly increasing tools' wear resistance, and also increasing the surface quality of the entire tool cutting edge;

**Substrate**  
OKE independently develops high-performance carbide rods specifically for high-hardness end mills with grain size 0.2μm, cobalt content 9%, Hardness HV2050 and bending strength 4200N/mm<sup>2</sup>;



### PROCESSING CASE

MACHINED PART		APPLICATION CONDITIONS		
	Workpiece	Connecting plate	Cutting speed	4500r/min
	Tool model	OMH-4E-060	Feed rate	1300mm/min
		A well-known domestic brand	Cutting depth	0.2mm
Workpiece material	#45 steel after quenching	Cutting width	5mm	
Cutting method	End milling	Cooling method	水溶性切削液冷却	

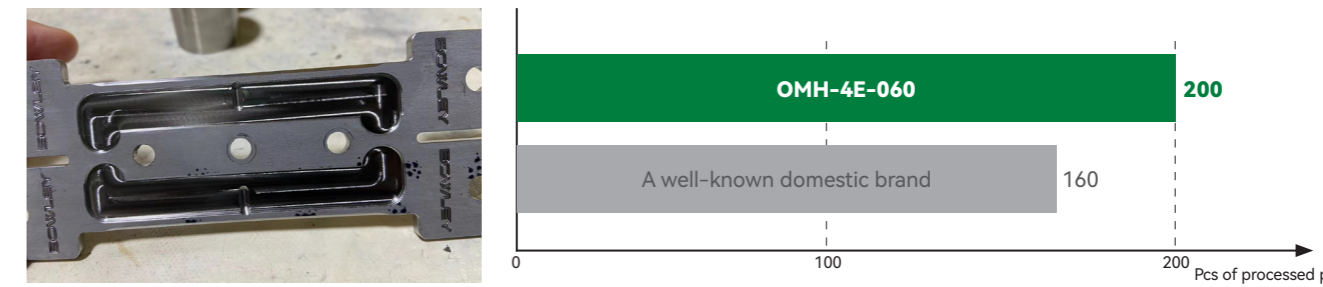



# OMH-4E

## 4-flute straight shank flat end mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

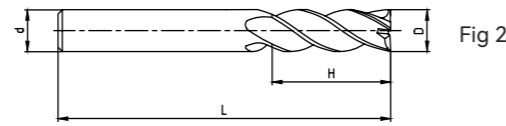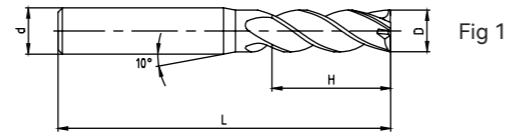

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMH-4E-010F	1.0	3	3	50	4	1	●
OMH-4E-010S	1.0	4	3	50	4	1	●
OMH-4E-010	1.0	6	3	50	4	1	●
OMH-4E-015F	1.5	3	4	50	4	1	●
OMH-4E-015S	1.5	4	4	50	4	1	●
OMH-4E-015	1.5	6	4	50	4	1	●
OMH-4E-020F	2.0	3	6	50	4	1	●
OMH-4E-020S	2.0	4	6	50	4	1	●
OMH-4E-020	2.0	6	6	50	4	1	●
OMH-4E-025F	2.5	3	8	50	4	1	●
OMH-4E-025S	2.5	4	8	50	4	1	●
OMH-4E-025	2.5	6	8	50	4	1	●
OMH-4E-030F	3.0	3	8	50	4	2	●
OMH-4E-030S	3.0	4	8	50	4	1	●
OMH-4E-030	3.0	6	8	50	4	1	●
OMH-4E-035S	3.5	4	10	50	4	1	●
OMH-4E-040S	4.0	4	11	50	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMH-4E

## 4-flute straight shank flat end mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

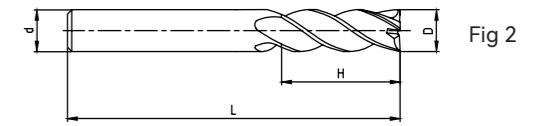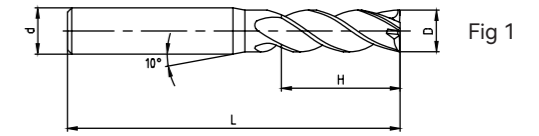

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMH-4E-035	3.5	6	10	50	4	1	●
OMH-4E-040	4.0	6	11	50	4	1	●
OMH-4E-045	4.5	6	11	50	4	1	●
OMH-4E-050	5.0	6	13	50	4	1	●
OMH-4E-055	5.5	6	16	50	4	1	●
OMH-4E-060	6.0	6	16	50	4	2	●
OMH-4E-070	7.0	8	20	60	4	1	●
OMH-4E-080	8.0	8	20	60	4	2	●
OMH-4E-090	9.0	10	22	75	4	1	●
OMH-4E-100	10.0	10	25	75	4	2	●
OMH-4E-110	11.0	12	26	75	4	1	●
OMH-4E-120	12.0	12	30	75	4	2	●
OMH-4E-140	14.0	14	32	75	4	2	●
OMH-4E-160	16.0	16	45	100	4	2	●
OMH-4E-180	18.0	18	45	100	4	2	●
OMH-4E-200	20.0	20	45	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC



## OMH-4EL

### 四刃直柄长刃平头立铣刀



#### Diameter Tolerance:

D3~D6	0,-0.02
D7~D14	0,-0.025
D15~D20	0,-0.03

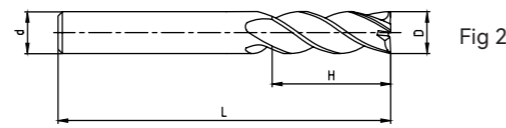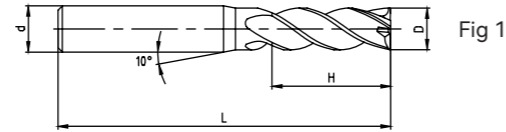

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMH-4E-030L	3.0	6	12	75	4	1	▲
OMH-4E-040L	4.0	6	15	75	4	1	▲
OMH-4E-050L	5.0	6	20	75	4	1	▲
OMH-4E-060L	6.0	6	20	75	4	2	▲
OMH-4E-080L	8.0	8	25	100	4	2	▲
OMH-4E-100L	10.0	10	30	100	4	2	▲
OMH-4E-120L	12.0	12	35	100	4	2	▲
OMH-4E-140L	14.0	14	40	100	4	2	▲
OMH-4E-160L	16.0	16	50	150	4	2	▲
OMH-4E-200L	20.0	20	55	150	4	2	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC



## OMH-4EH

### 四刃长柄平头立铣刀



#### Diameter Tolerance:

D3~D6	0,-0.02
D7~D12	0,-0.025

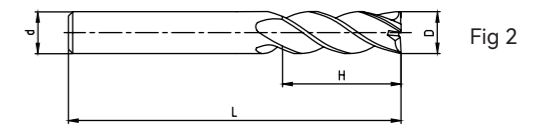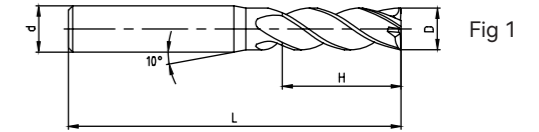

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMH-4E-030SH	3.0	4	8	75	4	1	●
OMH-4E-030H	3.0	6	8	75	4	1	●
OMH-4E-040SH	4.0	4	11	75	4	2	●
OMH-4E-040H	4.0	6	11	75	4	1	●
OMH-4E-060H	6.0	6	16	75	4	2	●
OMH-4E-080H	8.0	8	20	75	4	2	●
OMH-4E-100H	10.0	10	25	100	4	2	●
OMH-4E-120H	12.0	12	30	100	4	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMH-4EG

## 4-Flute Extra Long Shank Flat End Mills

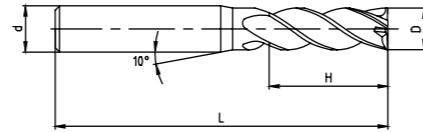


### Diameter Tolerance:

D6	0,-0.02
D7~D12	0,-0.025

Type	Basic Dimension (mm)				Number of flute Z	Stock
	D	d	H	L		
OMH-4E-060G	6.0	6	16	100	4	●
OMH-4E-080G	8.0	8	20	100	4	●
OMH-4E-100G	10.0	10	25	150	4	●
OMH-4E-120G	12.0	12	30	150	4	●

● Stock Available ▲ Make-to-order

OMH-4E/4EL/4EG/4EH Cutting Parameters						
Workpiece Material	Pre-hardened steel·Hardened steel 40-50HRC		Hardened steel 50-60HRC		Hardened steel 60-68HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	320	40000	320	32000	260
2	40000	800	24000	480	16000	320
3	32000	1020	16000	510	11000	350
4	24000	1250	12000	620	8000	420
5	19000	1360	9500	680	6400	460
6	16000	1540	8000	770	5300	510
8	12000	1540	6000	770	4000	510
10	9600	1540	4800	770	3200	510
12	8000	1600	4000	800	2700	540
14	6800	1340	3400	680	2300	460
16	6000	1200	3000	600	2000	400
18	5300	1060	2700	530	1800	360
20	4800	960	2400	480	1600	320

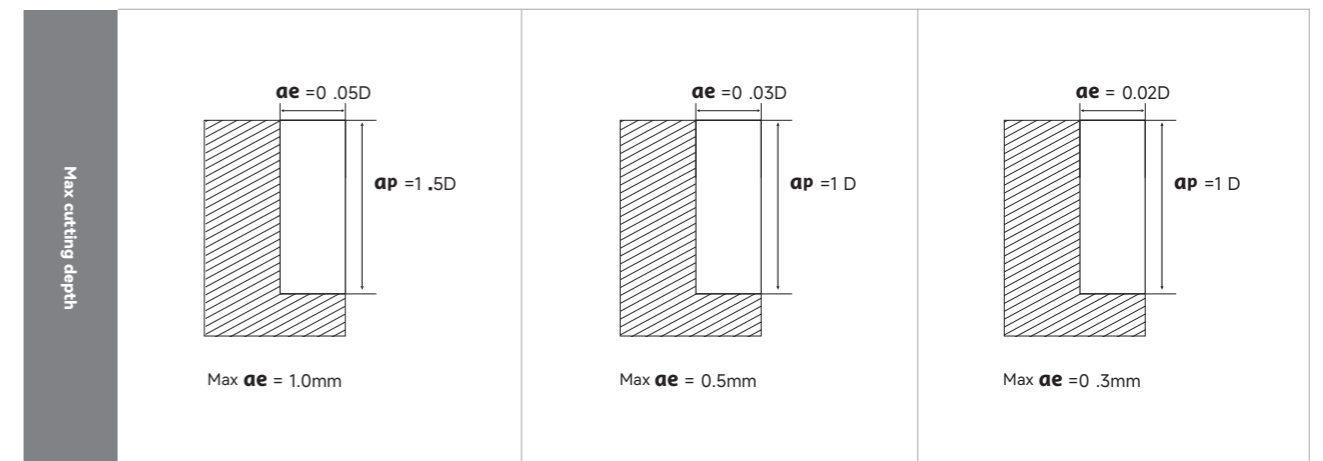

Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
		○	○	●	●						

● Very Suitable ○ Suitable

Hardness unit: HRC

- Please use high-precision, high-rigidity equipment and fixtures
- The above table is a benchmark for small load changes such as contour lines.
- If the rigidity of the machine tool and the workpiece installation is in worse condition, vibration and abnormal noise will occur. In this case, the speed and feed rate in the above table should be reduced correspondingly.
- Please use air cooling or MQC (minimum oil mist cooling)
- For side milling, it is recommended to use down milling
- Keep the tool overhang as short as possible without interference


# OMH-4R

## 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D7~D12	0,-0.025

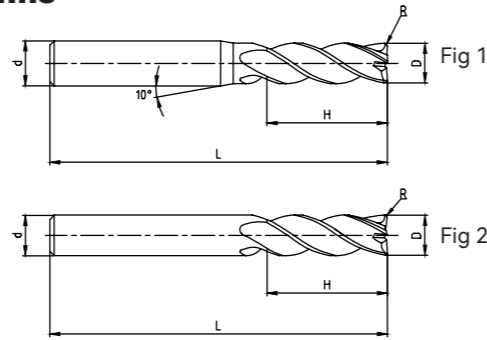

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	d	H	L	R			
OMH-4R-010R0.2S	1.0	4	3	50	0.2	4	1	●
OMH-4R-015R0.2S	1.5	4	4	50	0.2	4	1	●
OMH-4R-020R0.2S	2.0	4	6	50	0.2	4	1	●
OMH-4R-020R0.5S	2.0	4	6	50	0.5	4	1	●
OMH-4R-025R0.2S	2.5	4	8	50	0.2	4	1	●
OMH-4R-025R0.5S	2.5	4	8	50	0.5	4	1	●
OMH-4R-030R0.2S	3.0	4	8	50	0.2	4	1	●
OMH-4R-030R0.5S	3.0	4	8	50	0.5	4	1	●
OMH-4R-040R0.2S	4.0	4	10	50	0.2	4	2	●
OMH-4R-040R0.3S	4.0	4	10	50	0.3	4	2	●
OMH-4R-040R0.5S	4.0	4	10	50	0.5	4	2	●
OMH-4R-050R0.2	5.0	6	13	50	0.2	4	1	●
OMH-4R-050R0.5	5.0	6	13	50	0.5	4	1	●
OMH-4R-050R1.0	5.0	6	13	50	1.0	4	1	●
OMH-4R-060R0.2	6.0	6	16	50	0.2	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●		○					

● Very Suitable ○ Suitable

Hardness unit: HRC


# OMH-4R

## 四刃直柄圆弧立铣刀



### Diameter Tolerance:

D1~D6	0,-0.02
D7~D12	0,-0.025

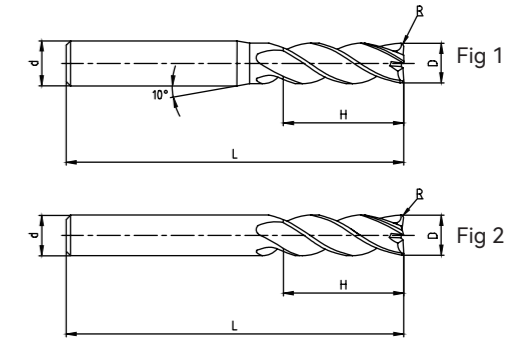

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	d	H	L	R			
OMH-4R-060R0.5	6.0	6	16	50	0.5	4	2	●
OMH-4R-060R1.0	6.0	6	16	50	1.0	4	2	●
OMH-4R-080R0.2	8.0	8	20	60	0.2	4	2	●
OMH-4R-080R0.5	8.0	8	20	60	0.5	4	2	●
OMH-4R-080R1.0	8.0	8	20	60	1.0	4	2	●
OMH-4R-100R0.2	10.0	10	25	75	0.2	4	2	●
OMH-4R-100R0.5	10.0	10	25	75	0.5	4	2	●
OMH-4R-100R1.0	10.0	10	25	75	1.0	4	2	●
OMH-4R-100R2.0	10.0	10	25	75	2.0	4	2	●
OMH-4R-100R3.0	10.0	10	25	75	3.0	4	2	●
OMH-4R-120R0.2	12.0	12	30	75	0.2	4	2	●
OMH-4R-120R0.5	12.0	12	30	75	0.5	4	2	●
OMH-4R-120R1.0	12.0	12	30	75	1.0	4	2	●
OMH-4R-120R2.0	12.0	12	30	75	2.0	4	2	●
OMH-4R-120R3.0	12.0	12	30	75	3.0	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●		○					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMH-4RH

## 4-Flute Long Shank Corner Radius End Mills



### Diameter Tolerance:

D4~D6	0,-0.02
D7~D12	0,-0.025

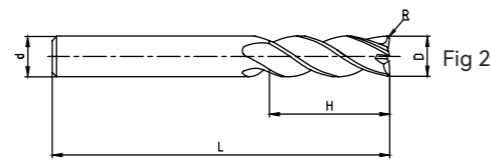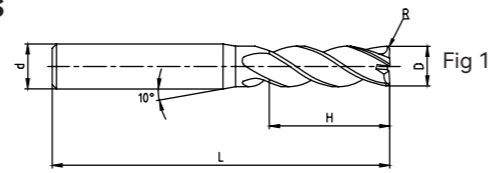

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMH-4R-040R0.2SH	4.0	0.2	4	10	75	4	2	●
OMH-4R-040R0.2H	4.0	0.2	6	10	75	4	1	●
OMH-4R-040R0.5SH	4.0	0.5	4	10	75	4	2	●
OMH-4R-040R0.5H	4.0	0.5	6	10	75	4	1	●
OMH-4R-060R0.2H	6.0	0.2	6	16	75	4	2	●
OMH-4R-060R0.5H	6.0	0.5	6	16	75	4	2	●
OMH-4R-060R1.0H	6.0	1.0	6	16	75	4	2	●
OMH-4R-080R0.2H	8.0	0.2	8	20	75	4	2	●
OMH-4R-080R0.5H	8.0	0.5	8	20	75	4	2	●
OMH-4R-080R1.0H	8.0	1.0	8	20	75	4	2	●
OMH-4R-100R0.5H	10.0	0.5	10	25	100	4	2	●
OMH-4R-100R1.0H	10.0	1.0	10	25	100	4	2	●
OMH-4R-100R2.0H	10.0	2.0	10	25	100	4	2	●
OMH-4R-120R0.2H	12.0	0.2	12	30	100	4	2	●
OMH-4R-120R0.5H	12.0	0.5	12	30	100	4	2	●
OMH-4R-120R1.0H	12.0	1.0	12	30	100	4	2	●
OMH-4R-120R2.0H	12.0	2.0	12	30	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC


# OMH-4RG

## 四刃超长柄圆弧立铣刀



### Diameter Tolerance:

D6	0,-0.02
D7~D12	0,-0.025

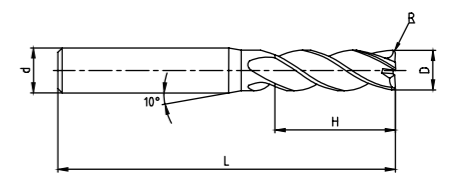

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMH-4R-060R0.2G	6.0	0.2	6	16	100	4	●
OMH-4R-060R0.5G	6.0	0.5	6	16	100	4	●
OMH-4R-060R1.0G	6.0	1.0	6	16	100	4	●
OMH-4R-080R0.2G	8.0	0.2	8	20	100	4	●
OMH-4R-080R0.5G	8.0	0.5	8	20	100	4	●
OMH-4R-080R1.0G	8.0	1.0	8	20	100	4	●
OMH-4R-100R0.2G	10.0	0.2	10	25	150	4	●
OMH-4R-100R0.5G	10.0	0.5	10	25	150	4	●
OMH-4R-100R1.0G	10.0	1.0	10	25	150	4	●
OMH-4R-100R2.0G	10.0	2.0	10	25	150	4	●
OMH-4R-120R0.2G	12.0	0.2	12	30	150	4	●
OMH-4R-120R0.5G	12.0	0.5	12	30	150	4	●
OMH-4R-120R1.0G	12.0	1.0	12	30	150	4	●
OMH-4R-120R2.0G	12.0	2.0	12	30	150	4	●


● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMH-4R、4RH、4RG Cutting Parameters						
Workpiece Material	Pre-hardened steel·Hardened steel 40-50HRC		Hardened steel 50-60HRC		Hardened steel 60-68HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
3	32000	1225	16000	610	11000	420
4	24000	1500	12000	745	8000	500
5	19000	1630	9500	815	6400	550
6	16000	1850	8000	925	5300	610
8	12000	1850	6000	925	4000	610
10	9600	1850	4800	925	3200	610
12	8000	1920	4000	960	2700	648
16	6000	1440	3000	720	2000	480

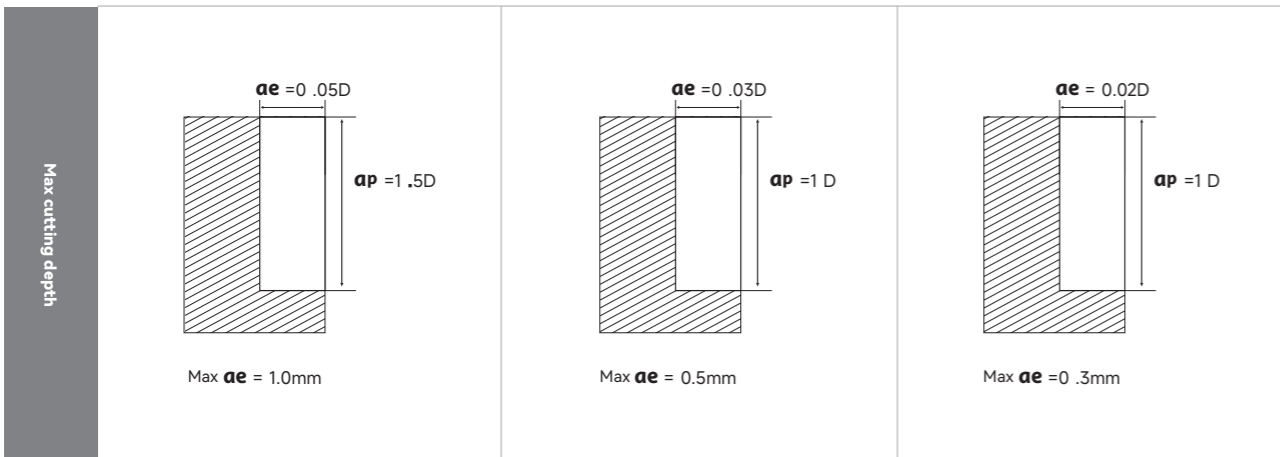



- Please use high-precision, high-rigidity equipment and fixtures
- The above table is a benchmark for small load changes such as contour lines.
- If the rigidity of the machine tool and the workpiece installation is in worse condition, vibration and abnormal noise will occur. In this case, the speed and feed rate in the above table should be reduced correspondingly.
- Please use air cooling or MQC (minimum oil mist cooling)
- For side milling, it is recommended to use down milling
- Keep the tool overhang as short as possible without interference

## OMH-2B 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.005	

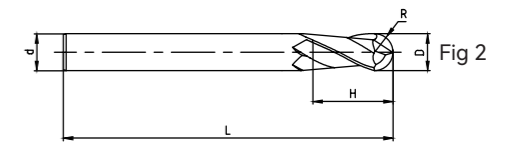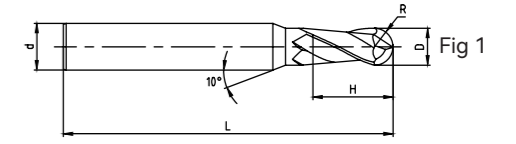

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMH-2B-010R0.5S	1.0	0.5	4	2	50	2	1	●
OMH-2B-010R0.5	1.0	0.5	6	2	50	2	1	●
OMH-2B-015R0.75S	1.5	0.75	4	3	50	2	1	●
OMH-2B-015R0.75	1.5	0.75	6	3	50	2	1	●
OMH-2B-020R1.0S	2.0	1.0	4	4	50	2	1	●
OMH-2B-020R1.0	2.0	1.0	6	4	50	2	1	●
OMH-2B-025R1.25S	2.5	1.25	4	5	50	2	1	●
OMH-2B-025R1.25	2.5	1.25	6	5	50	2	1	●
OMH-2B-030R1.5S	3.0	1.5	4	6	50	2	1	●
OMH-2B-030R1.5	3.0	1.5	6	6	50	2	1	●
OMH-2B-035R1.75	3.5	1.75	6	8	50	2	1	●
OMH-2B-040R2.0S	4.0	2.0	4	8	50	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMH-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.005	

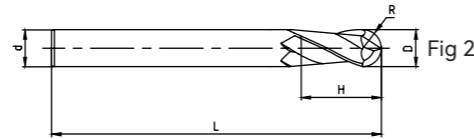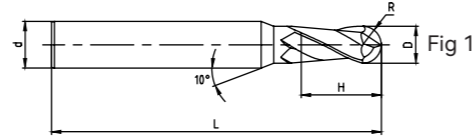

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMH-2B-040R2.0	4.0	2.0	6	8	50	2	1	●
OMH-2B-050R2.5	5.0	2.5	6	10	50	2	1	●
OMH-2B-055R2.75	5.5	2.75	6	12	50	2	1	●
OMH-2B-060R3.0	6.0	3.0	6	12	50	2	2	●
OMH-2B-070R3.5	7.0	3.5	8	14	60	2	1	●
OMH-2B-080R4.0	8.0	4.0	8	16	60	2	2	●
OMH-2B-090R4.5	9.0	4.5	10	18	75	2	1	●
OMH-2B-100R5.0	10.0	5.0	10	20	75	2	2	●
OMH-2B-120R6.0	12.0	6.0	12	24	75	2	2	●
OMH-2B-140R7.0	14.0	7.0	14	28	75	2	2	●
OMH-2B-160R8.0	16.0	8.0	16	32	100	2	2	●
OMH-2B-200R10.0	20.0	10.0	20	40	100	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMH-2BH

## 2-Flute Long Shank Ball Nose End Mills



### Diameter Tolerance:

D2~D20	0,-0.02
Corner Radius Tolerance ±0.005	

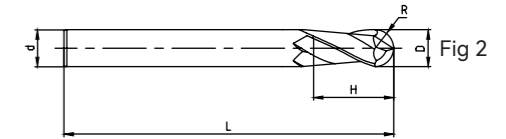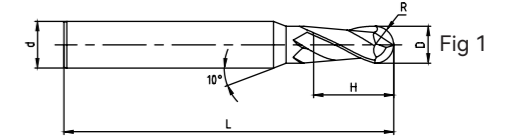

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMH-2B-020R1.0SH	2.0	1.0	4	4	75	2	1	●
OMH-2B-020R1.0H	2.0	1.0	6	4	75	2	1	●
OMH-2B-025R1.25SH	2.5	1.25	4	5	75	2	1	●
OMH-2B-025R1.25H	2.5	1.25	6	5	75	2	1	●
OMH-2B-030R1.5SH	3.0	1.5	4	6	75	2	1	●
OMH-2B-030R1.5H	3.0	1.5	6	6	75	2	1	●
OMH-2B-035R1.75SH	3.5	1.75	4	8	75	2	1	●
OMH-2B-035R1.75H	3.5	1.75	6	8	75	2	1	●
OMH-2B-040R2.0SH	4.0	2.0	4	8	75	2	2	●
OMH-2B-040R2.0H	4.0	2.0	6	8	75	2	1	●
OMH-2B-050R2.5H	5.0	2.5	6	10	75	2	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMH-2BH

## 2-Flute Long Shank Ball Nose End Mills



### Diameter Tolerance:

D2~D20	0,-0.02
Corner Radius Tolerance ±0.005	

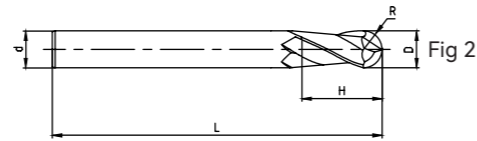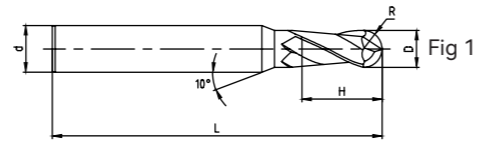

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMH-2B-055R2.75H	5.5	2.75	6	12	75	2	1	●
OMH-2B-060R3.0H	6.0	3.0	6	12	75	2	2	●
OMH-2B-070R3.5H	7.0	3.5	8	14	75	2	1	●
OMH-2B-080R4.0H	8.0	4.0	8	16	75	2	2	●
OMH-2B-090R4.5H	9.0	4.5	10	18	100	2	1	●
OMH-2B-100R5.0H	10.0	5.0	10	20	100	2	2	●
OMH-2B-120R6.0H	12.0	6.0	12	24	100	2	2	●
OMH-2B-140R7.0H	14.0	7.0	14	28	150	2	2	●
OMH-2B-160R8.0H	16.0	8.0	16	32	150	2	2	●
OMH-2B-200R10.0H	20.0	10.0	20	40	150	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC


# OMH-2BG

## 2-Flute Extra Long Shank Ball Nose End Mills



### Diameter Tolerance:

D6~D12	0,-0.02
Corner Radius Tolerance ±0.005	

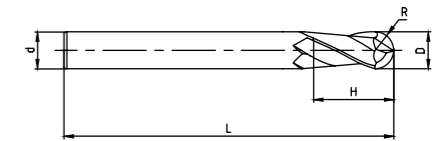

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMH-2B-060R3.0G	6.0	3.0	6	12	100	2	●
OMH-2B-080R4.0G	8.0	4.0	8	16	100	2	●
OMH-2B-100R5.0G	10.0	5.0	10	20	150	2	●
OMH-2B-120R6.0G	12.0	6.0	12	24	150	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					


● Very Suitable ○ Suitable

Hardness unit: HRC

OMH-2B/2BH/G Cutting Parameters

Workpiece Material	Pre-hardened steel · Hardened steel 40-50HRC				Hardened steel 50-60HRC				Hardened steel 60-68HRC			
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)	Ae (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)	Ae (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)
R0.5	40000	1900	0.01	0.05	36000	1500	0.01	0.05	32000	1400	0.01	0.05
R1.0	33000	3100	0.02	0.075	26000	2100	0.02	0.075	24000	2000	0.02	0.075
R1.5	29000	4100	0.03	0.1	23000	2900	0.03	0.1	21000	2600	0.03	0.1
R2.0	22000	3900	0.04	0.15	17000	2500	0.04	0.15	15500	2100	0.04	0.15
R2.5	17500	3500	0.05	0.15	13500	2200	0.05	0.15	13000	2000	0.05	0.15
R3.0	15000	3100	0.06	0.2	11500	1700	0.06	0.2	10500	1500	0.06	0.2
R4.0	11000	2500	0.08	0.25	8600	1600	0.08	0.25	8000	1400	0.08	0.25
R5.0	9000	2000	0.1	0.3	7000	1400	0.1	0.3	6000	1200	0.1	0.3
R6.0	7500	1800	0.1	0.35	5700	1300	0.1	0.35	5300	1200	0.1	0.35
R8.0	5500	1800	0.1	0.4	4300	1300	0.1	0.4	4000	1200	0.1	0.4
R10.0	4500	1800	0.1	0.5	3500	1300	0.1	0.5	3200	1200	0.1	0.5

Max Cutting Depth

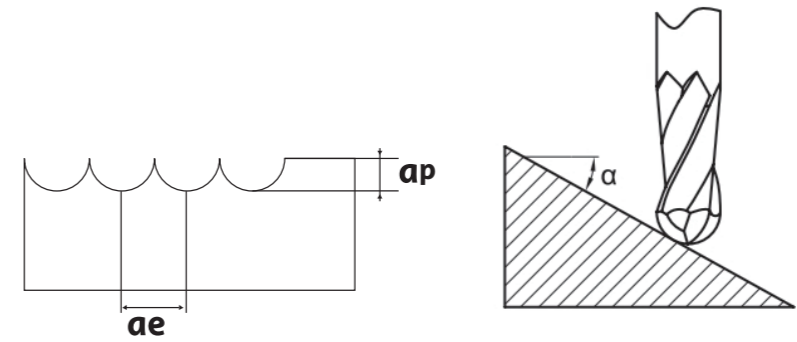

- Please select high-precision machine and tool holder.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Please use air cooling or MQL (minimum oil mist cooling).
- If inclination angle  $\alpha$  over  $15^\circ$ , please reduce the speed to 50%-80% of above table.
- Make overhang of tool as short as possible in conditions of non-interference.

# OMHH

## HIGH-HARDENED STEEL MACHINING

PRODUCT SERIES

**Major spiral**  
45° spiral angle and large tool lead increase tool wear resistance while reducing cutting forces and improve machining efficiency and workpiece surface quality.

**High-performance coating**  
TiAlSiN Bronze high hard coating with uniform coating thickness and smooth surface.

**Large core body**  
Large core body ensures tool rigidity while cutting.

**Reasonable butterfly Angle**  
Reasonable butterfly angle and unique face grinding craft makes end milling effect more prominent, stable. It can effectively solve the ring stripe in the process of end milling.

**Edge preparation craft**  
The precision sandblasting passivation machine is used to blunt the cutting edge into an arc shape. This greatly increases the tool wear resistance and the tool edge quality.

**Substrate**  
The company independently research and develop high performance bar specially developed for high hard milling cutter.

### PROCESSING CASE

SHAPE		CONDITIONS & RESULT	
	Workpiece	Lower laminate body piece	
	Tool type	OMHH-4R-080R0.5	
	Machining material	A famous domestic brand	
	Cutting speed	S136 mold steel ( HRC52)	
	Feed speed	11000	
	Cutting depth	600	
	Cutting width	0.2~0.5	
	Cooling method	0.07	
		Cooling fluid	





# OMHH-4E

## 4-flute straight shank flat end mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03



Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMHH-4E-010F	1.0	3	3	50	4	1	●
OMHH-4E-010S	1.0	4	3	50	4	1	●
OMHH-4E-010	1.0	6	3	50	4	1	●
OMHH-4E-015F	1.5	3	4	50	4	1	●
OMHH-4E-015S	1.5	4	4	50	4	1	●
OMHH-4E-015	1.5	6	4	50	4	1	●
OMHH-4E-020F	2.0	3	6	50	4	1	●
OMHH-4E-020S	2.0	4	6	50	4	1	●
OMHH-4E-020	2.0	6	6	50	4	1	●
OMHH-4E-025F	2.5	3	8	50	4	1	●
OMHH-4E-025S	2.5	4	8	50	4	1	●
OMHH-4E-025	2.5	6	8	50	4	1	●
OMHH-4E-030F	3.0	3	8	50	4	2	●
OMHH-4E-030S	3.0	4	8	50	4	1	●
OMHH-4E-030	3.0	6	8	50	4	1	●
OMHH-4E-035S	3.5	4	10	50	4	1	●
OMHH-4E-040S	4.0	4	11	50	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-4E

## 4-flute straight shank flat end mills



### Diameter Tolerance:

D1~D6	0,-0.02
D6~D14	0,-0.025
D15~D20	0,-0.03

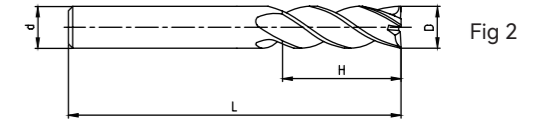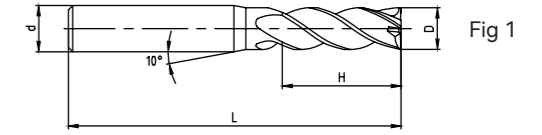

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMHH-4E-035	3.5	6	10	50	4	1	●
OMHH-4E-040	4.0	6	11	50	4	1	●
OMHH-4E-045	4.5	6	11	50	4	1	●
OMHH-4E-050	5.0	6	13	50	4	1	●
OMHH-4E-055	5.5	6	16	50	4	1	●
OMHH-4E-060	6.0	6	16	50	4	2	●
OMHH-4E-070	7.0	8	20	60	4	1	●
OMHH-4E-080	8.0	8	20	60	4	2	●
OMHH-4E-090	9.0	10	22	75	4	1	●
OMHH-4E-100	10.0	10	25	75	4	2	●
OMHH-4E-110	11.0	12	26	75	4	1	●
OMHH-4E-120	12.0	12	30	75	4	2	●
OMHH-4E-140	14.0	14	32	75	4	2	●
OMHH-4E-160	16.0	16	45	100	4	2	●
OMHH-4E-180	18.0	18	45	100	4	2	●
OMHH-4E-200	20.0	20	45	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable



Hardness unit: HRC

## OMHH-4EL 4-Flute Flat End Mills With Straight Shank And Long Cutting Edge



### Diameter Tolerance:

D3~D6	0,-0.02
D7~D14	0,-0.025
D15~D20	0,-0.03

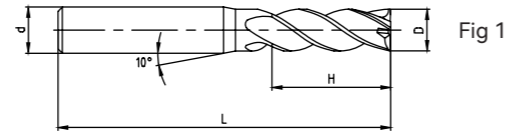

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMHH-4E-030L	3.0	6	12	75	4	1	▲
OMHH-4E-040L	4.0	6	15	75	4	1	▲
OMHH-4E-050L	5.0	6	20	75	4	1	▲
OMHH-4E-060L	6.0	6	20	75	4	2	▲
OMHH-4E-080L	8.0	8	25	100	4	2	▲
OMHH-4E-100L	10.0	10	30	100	4	2	▲
OMHH-4E-120L	12.0	12	35	100	4	2	▲
OMHH-4E-140L	14.0	14	40	100	4	2	▲
OMHH-4E-160L	16.0	16	50	150	4	2	▲
OMHH-4E-200L	20.0	20	55	150	4	2	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable



Hardness unit: HRC

## OMHH-4EH 4-Flutes Long Shank Flat End Mill



### Diameter Tolerance:

D3~D6	0,-0.02
D7~D12	0,-0.025

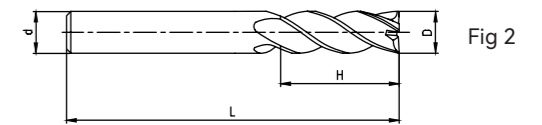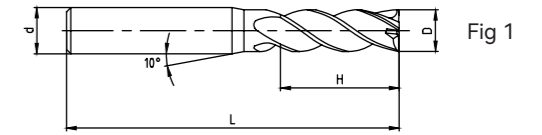

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMHH-4E-030SH	3.0	4	8	75	4	2	●
OMHH--4E-030H	3.0	6	8	75	4	2	●
OMHH-4E-040SH	4.0	4	11	75	4	1	●
OMHH-4E-040H	4.0	6	11	75	4	2	●
OMHH-4E-060H	6.0	6	16	75	4	1	●
OMHH-4E-080H	8.0	8	20	75	4	1	●
OMHH-4E-100H	10.0	10	25	100	4	1	●
OMHH-4E-120H	12.0	12	30	100	4	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-4EG

## 4-Flutes Extra Long Shank Flat End Mill



### Diameter Tolerance:


D6	0,-0.02
D7~D12	0,-0.025

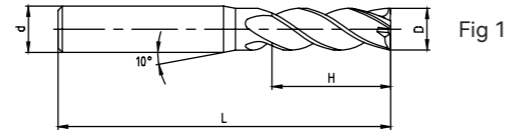

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMHH-4E-060G	6.0	6	16	100	4	2	●
OMHH-4E-080G	8.0	8	20	100	4	2	●
OMHH-4E-100G	10.0	10	25	150	4	2	●
OMHH-4E-120G	12.0	12	30	150	4	2	●

● Stock Available ▲ Make-to-order

OMHH-4E/4EL/4EG/4EH Cutting Parameters						
Workpiece Material	Pre-hardened steel·Hardened steel 40-50HRC		Hardened steel 50-60HRC		Hardened steel 60-68HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	320	40000	320	32000	260
2	40000	800	24000	480	16000	320
3	32000	1020	16000	510	11000	350
4	24000	1250	12000	620	8000	420
5	19000	1360	9500	680	6400	460
6	16000	1540	8000	770	5300	510
8	12000	1540	6000	770	4000	510
10	9600	1540	4800	770	3200	510
12	8000	1600	4000	800	2700	540
14	6800	1340	3400	680	2300	460
16	6000	1200	3000	600	2000	400
18	5300	1060	2700	530	1800	360
20	4800	960	2400	480	1600	320

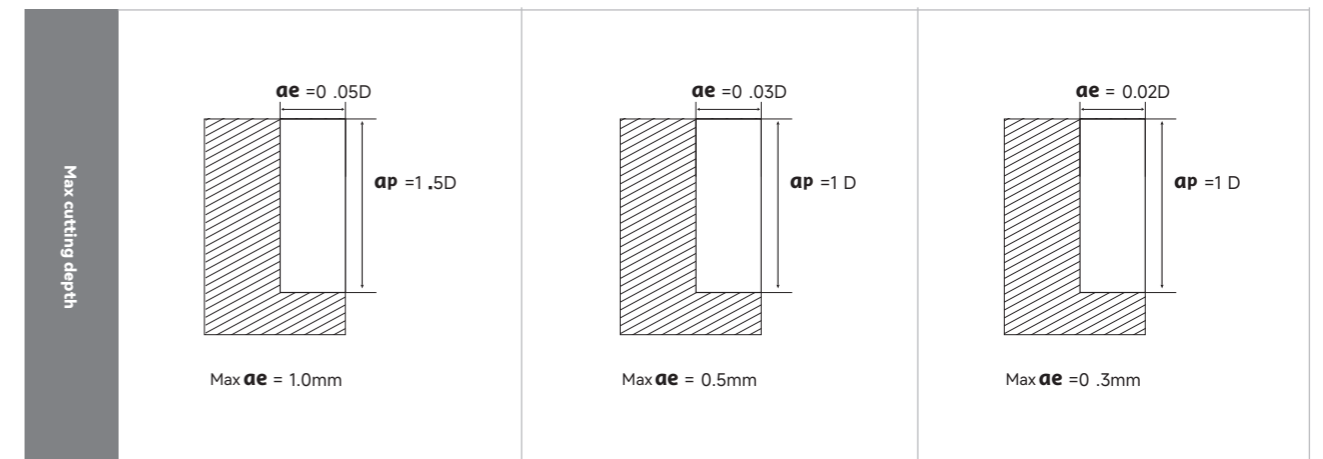

- Please select high-precision and high rigidity machine and tool holder.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Please use air cooling or MQL (minimum oil mist cooling).
- Climb milling is recommended in the case of side milling.
- Make overhang of tool as short as possible in conditions of non-interference.


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●		○				

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMHH-6E

## 6-Flute Flat End Mills With Straight Shank

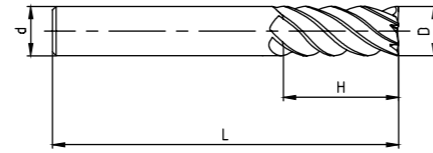

### Diameter Tolerance:

D6	0,-0.02
D7~D14	0,-0.025
D15~D20	0,-0.03




Type	Basic Dimension (mm)				Number of flute	Stock
	D	d	H	L	Z	
OMHH-6E-060	6	6	18	60	6	●
OMHH-6E-080	8	8	20	60	6	●
OMHH-6E-100	10	10	30	75	6	●
OMHH-6E-120	12	12	32	75	6	●
OMHH-6E-160	16	16	40	100	6	●
OMHH-6E-200	20	20	45	100	6	●

● Stock Available ▲ Make-to-order

### OMHH-6E Cutting Parameters

Workpiece Material	Pre-hardened steel · Hardened steel 40-50HRC		Hardened steel 50-60HRC		Hardened steel 60-68HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
6	16000	1850	8000	925	5300	610
8	12000	1850	6000	925	4000	610
10	9600	1850	4800	925	3200	610
12	8000	1920	4000	960	2700	650
14	6800	1600	3400	815	2300	550
16	6000	1440	3000	720	2000	480
18	5300	1270	2700	635	1800	430
20	4800	1150	2400	575	1600	385

Max cutting depth



- Please select high-precision and high rigidity machine and tool holder.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Please use air cooling or MQL (minimum oil mist cooling).
- Climb milling is recommended in the case of side milling.
- Make overhang of tool as short as possible in conditions of non-interference.


		Processed material									
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
			○	●	●		○				

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMHH-6EL

## 6-Flute Flat End Mills With Straight Shank And Long Cutting Edge

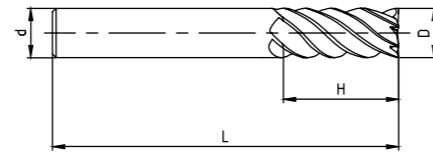

### Diameter Tolerance:

D6	0,-0.02
D7~D14	0,-0.025
D15~D20	0,-0.03

Type	Basic Dimension (mm)				Number of flute	Stock
	D	d	H	L	Z	
OMHH-6E-060L	6	6	24	75	6	●
OMHH-6E-080L	8	8	32	75	6	●
OMHH-6E-100L	10	10	40	100	6	●
OMHH-6E-120L	12	12	45	100	6	●
OMHH-6E-160L	16	16	64	150	6	●
OMHH-6E-200L	20	20	75	150	6	●

● Stock Available ▲ Make-to-order



Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
			○	●	●		○				

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMHH-4R

## 4-Flutes Straight Shank Corner Radius End Mills

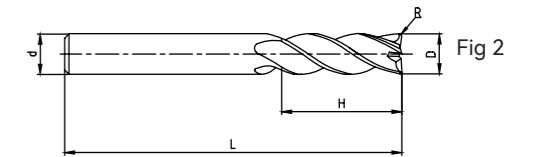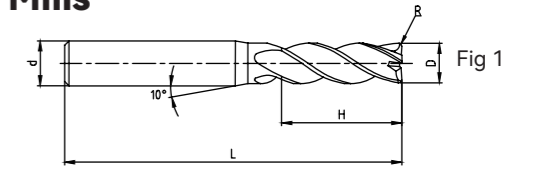

### Diameter Tolerance:

D1~D6	0,-0.02
D7~D12	0,-0.025

Type	Basic Dimension (mm)					Number of flute	Geometry	Stock
	D	R	d	H	L	Z		
OMHH-4R-010R0.2S	1.0	0.2	4	3	50	4	1	●
OMHH-4R-015R0.2S	1.5	0.2	4	4	50	4	1	●
OMHH-4R-020R0.2S	2.0	0.2	4	6	50	4	1	●
OMHH-4R-020R0.5S	2.0	0.5	4	6	50	4	1	●
OMHH-4R-025R0.2S	2.5	0.2	4	8	50	4	1	●
OMHH-4R-025R0.5S	2.5	0.5	4	8	50	4	1	●
OMHH-4R-030R0.2S	3.0	0.2	4	8	50	4	1	●
OMHH-4R-030R0.5S	3.0	0.5	4	8	50	4	1	●
OMHH-4R-040R0.2S	4.0	0.2	4	10	50	4	2	●
OMHH-4R-040R0.3S	4.0	0.3	4	10	50	4	2	●
OMHH-4R-040R0.5S	4.0	0.5	4	10	50	4	2	●
OMHH-4R-050R0.2	5.0	0.2	6	13	50	4	1	●
OMHH-4R-050R0.5	5.0	0.5	6	13	50	4	1	●
OMHH-4R-050R1.0	5.0	1.0	6	13	50	4	1	●
OMHH-4R-060R0.2	6.0	0.2	6	16	50	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●			○				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-4R

## 4-Flutes Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D1~D6	0,-0.02
D7~D12	0,-0.025

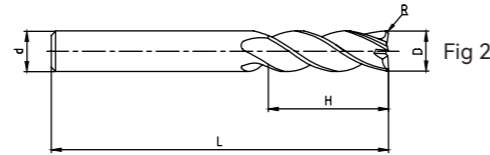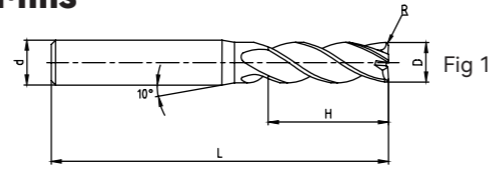

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-4R-060R0.5	6.0	0.5	6	16	50	4	2	●
OMHH-4R-060R1.0	6.0	1.0	6	16	50	4	2	●
OMHH-4R-080R0.2	8.0	0.2	8	20	60	4	2	●
OMHH-4R-080R0.5	8.0	0.5	8	20	60	4	2	●
OMHH-4R-080R1.0	8.0	1.0	8	20	60	4	2	●
OMHH-4R-100R0.2	10.0	0.2	10	25	75	4	2	●
OMHH-4R-100R0.5	10.0	0.5	10	25	75	4	2	●
OMHH-4R-100R1.0	10.0	1.0	10	25	75	4	2	●
OMHH-4R-100R2.0	10.0	2.0	10	25	75	4	2	●
OMHH-4R-100R3.0	10.0	3.0	10	25	75	4	2	●
OMHH-4R-120R0.2	12.0	0.2	12	30	75	4	2	●
OMHH-4R-120R0.5	12.0	0.5	12	30	75	4	2	●
OMHH-4R-120R1.0	12.0	1.0	12	30	75	4	2	●
OMHH-4R-120R2.0	12.0	2.0	12	30	75	4	2	●
OMHH-4R-120R3.0	12.0	3.0	12	30	75	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●							

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-4RH/G

## 4-Flutes Long Shank/extra long Corner Radius End Mills



### Diameter Tolerance:

D4~D6	0,-0.02
D7~D20	0,-0.025

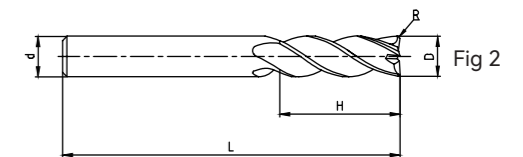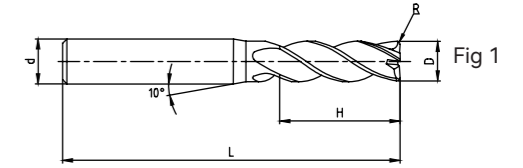

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-4R-040R0.2SH	4.0	0.2	4	10	75	4	2	●
OMHH-4R-040R0.2H	4.0	0.2	6	10	75	4	1	●
OMHH-4R-040R0.5SH	4.0	0.5	4	10	75	4	2	●
OMHH-4R-040R0.5H	4.0	0.5	6	10	75	4	1	●
OMHH-4R-060R0.2H	6.0	0.2	6	16	75	4	2	●
OMHH-4R-060R0.2G	6.0	0.2	6	16	100	4	2	●
OMHH-4R-060R0.5H	6.0	0.5	6	16	75	4	2	●
OMHH-4R-060R0.5G	6.0	0.5	6	16	100	4	2	●
OMHH-4R-060R1.0H	6.0	1.0	6	16	75	4	2	●
OMHH-4R-060R1.0G	6.0	1.0	6	16	100	4	2	●
OMHH-4R-080R0.2H	8.0	0.2	8	20	75	4	2	●
OMHH-4R-080R0.2G	8.0	0.2	8	20	100	4	2	●
OMHH-4R-080R0.5H	8.0	0.5	8	20	75	4	2	●
OMHH-4R-080R0.5G	8.0	0.5	8	20	100	4	2	●
OMHH-4R-080R1.0H	8.0	1.0	8	20	75	4	2	●
OMHH-4R-080R1.0G	8.0	1.0	8	20	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●							

● Very Suitable ○ Suitable

Hardness unit: HRC


# OMHH-4RH/G

## 4-Flutes Long Shank/extra long Corner Radius End Mills



### Diameter Tolerance:

D4~D6	0,-0.02
D7~D20	0,-0.025

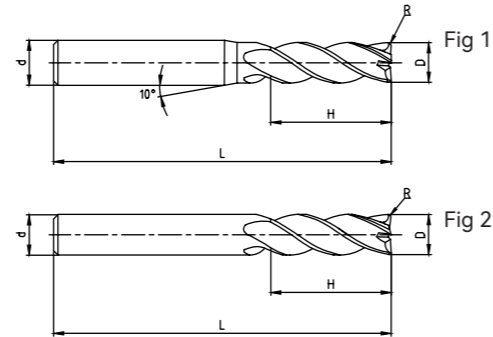

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-4R-100R0.2H	10.0	0.2	10	25	100	4	2	●
OMHH-4R-100R0.2G	10.0	0.2	10	25	150	4	2	●
OMHH-4R-100R0.5H	10.0	0.5	10	25	100	4	2	●
OMHH-4R-100R0.5G	10.0	0.5	10	25	150	4	2	●
OMHH-4R-100R1.0H	10.0	1.0	10	25	100	4	2	●
OMHH-4R-100R1.0G	10.0	1.0	10	25	150	4	2	●
OMHH-4R-100R2.0H	10.0	2.0	10	25	100	4	2	●
OMHH-4R-100R2.0G	10.0	2.0	10	25	150	4	2	●
OMHH-4R-120R0.2H	12.0	0.2	12	30	100	4	2	●
OMHH-4R-120R0.2G	12.0	0.2	12	30	150	4	2	●
OMHH-4R-120R0.5H	12.0	0.5	12	30	100	4	2	●
OMHH-4R-120R0.5G	12.0	0.5	12	30	150	4	2	●
OMHH-4R-120R1.0H	12.0	1.0	12	30	100	4	2	●
OMHH-4R-120R1.0G	12.0	1.0	12	30	150	4	2	●
OMHH-4R-120R2.0H	12.0	2.0	12	30	100	4	2	●
OMHH-4R-120R2.0G	12.0	2.0	12	30	150	4	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	○	○					

● Very Suitable ○ Suitable

Hardness unit: HRC

OMHH-4R、4RH、4RG 切削参数 | Parameter list

Workpiece Material	Pre-hardened steel · Hardened steel 40-50HRC		Hardened steel 50-60HRC		Hardened steel 60-68HRC	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
3	32000	1225	16000	610	11000	420
4	24000	1500	12000	745	8000	500
5	19000	1630	9500	815	6400	550
6	16000	1850	8000	925	5300	610
8	12000	1850	6000	925	4000	610
10	9600	1850	4800	925	3200	610
12	8000	1920	4000	960	2700	648
16	6000	1440	3000	720	2000	480

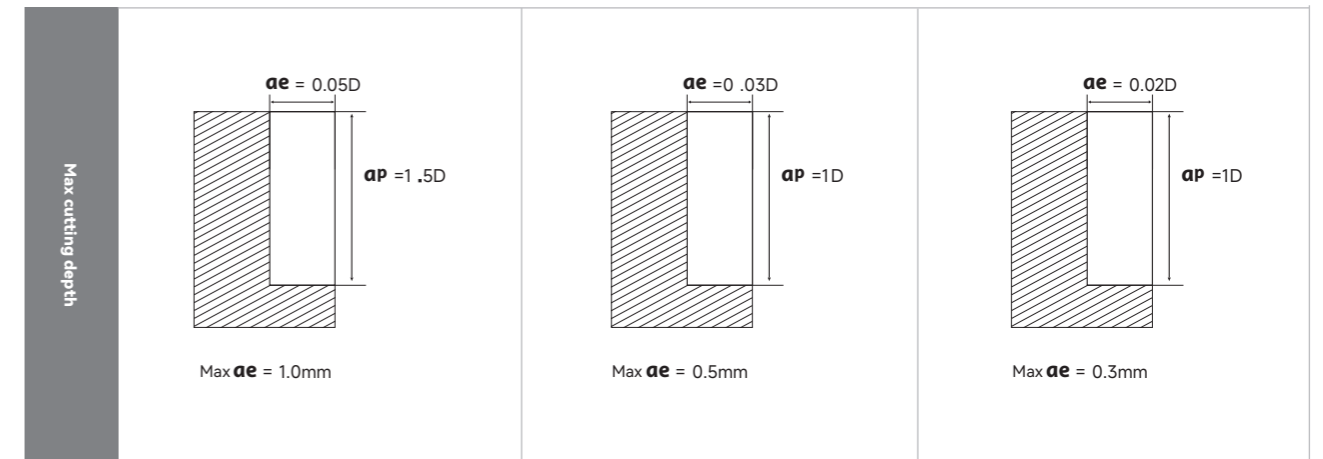

- Please select high-precision and high rigidity machine and tool holder.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Please use air cooling or MQL (minimum oil mist cooling).
- Climb milling is recommended in the case of side milling.
- Make overhang of tool as short as possible in conditions of non-interference.



# OMHH-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.005	

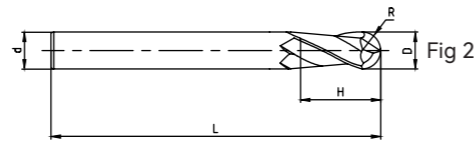

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-2B-010R0.5S	1.0	0.5	4	2	50	2	1	●
OMHH-2B-010R0.5	1.0	0.5	6	2	50	2	1	●
OMHH-2B-015R0.75S	1.5	0.75	4	3	50	2	1	●
OMHH-2B-015R0.75	1.5	0.75	6	3	50	2	1	●
OMHH-2B-020R1.0S	2.0	1.0	4	4	50	2	1	●
OMHH-2B-020R1.0	2.0	1.0	6	4	50	2	1	●
OMHH-2B-025R1.25S	2.5	1.25	4	5	50	2	1	●
OMHH-2B-025R1.25	2.5	1.25	6	5	50	2	1	●
OMHH-2B-030R1.5S	3.0	1.5	4	6	50	2	1	●
OMHH-2B-030R1.5	3.0	1.5	6	6	50	2	1	●
OMHH-2B-035R1.75	3.5	1.75	6	8	50	2	1	●
OMHH-2B-040R2.0S	4.0	2.0	4	8	50	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-2B

## 2-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.005	

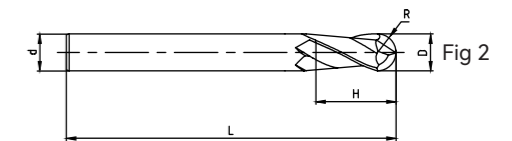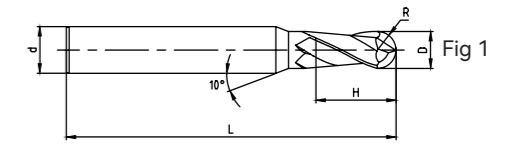

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-2B-040R2.0	4.0	2.0	6	8	50	2	1	●
OMHH-2B-050R2.5	5.0	2.5	6	10	50	2	1	●
OMHH-2B-055R2.75	5.5	2.75	6	12	50	2	1	●
OMHH-2B-060R3.0	6.0	3.0	6	12	50	2	2	●
OMHH-2B-070R3.5	7.0	3.5	8	14	60	2	1	●
OMHH-2B-080R4.0	8.0	4.0	8	16	60	2	2	●
OMHH-2B-090R4.5	9.0	4.5	10	18	75	2	1	●
OMHH-2B-100R5.0	10.0	5.0	10	20	75	2	2	●
OMHH-2B-120R6.0	12.0	6.0	12	24	75	2	2	●
OMHH-2B-140R7.0	14.0	7.0	14	28	75	2	2	●
OMHH-2B-160R8.0	16.0	8.0	16	32	100	2	2	●
OMHH-2B-200R10.0	20.0	10.0	20	40	100	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-2BH

## 2-Flute Long Shank Ball Nose End Mills



### Diameter Tolerance:

D2~D20	0,-0.02
Corner Radius Tolerance ±0.005	

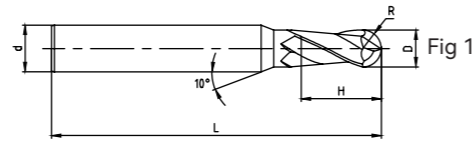

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-2B-020R1.0SH	2.0	1.0	4	4	75	2	1	●
OMHH-2B-020R1.0H	2.0	1.0	6	4	75	2	1	●
OMHH-2B-025R1.25SH	2.5	1.25	4	5	75	2	1	●
OMHH-2B-025R1.25H	2.5	1.25	6	6	75	2	1	●
OMHH-2B-030R1.5SH	3.0	1.5	4	6	75	2	1	●
OMHH-2B-030R1.5H	3.0	1.5	6	6	75	2	1	●
OMHH-2B-035R1.75SH	3.5	1.75	4	8	75	2	1	●
OMHH-2B-035R1.75H	3.5	1.75	6	8	75	2	1	●
OMHH-2B-040R2.0SH	4.0	2.0	4	8	75	2	2	●
OMHH-2B-040R2.0H	4.0	2.0	6	8	75	2	1	●
OMHH-2B-050R2.5H	5.0	2.5	6	10	75	2	1	●

● Stock Available ▲ Make-to-order



# OMHH-2BH

## 2-Flute Long Shank Ball Nose End Mills



### Diameter Tolerance:

D2~D20	0,-0.02
Corner Radius Tolerance ±0.005	

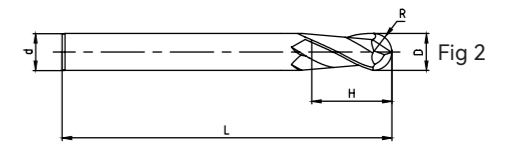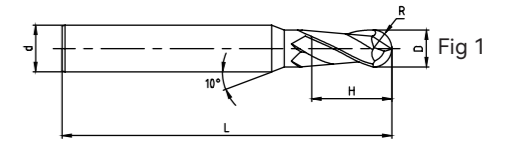

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-2B-055R2.75H	5.5	2.75	6	12	75	2	1	●
OMHH-2B-060R3.0H	6.0	3.0	6	12	75	2	2	●
OMHH-2B-070R3.5H	7.0	3.5	8	14	75	2	1	●
OMHH-2B-080R4.0H	8.0	4.0	8	16	75	2	2	●
OMHH-2B-090R4.5H	9.0	4.5	10	18	100	2	1	●
OMHH-2B-100R5.0H	10.0	5.0	10	20	100	2	2	●
OMHH-2B-120R6.0H	12.0	6.0	12	24	100	2	2	●
OMHH-2B-140R7.0H	14.0	7.0	14	28	150	2	2	●
OMHH-2B-160R8.0H	16.0	8.0	16	32	150	2	2	●
OMHH-2B-200R10.0H	20.0	10.0	20	40	150	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMHH-2BG

## 二刃超长柄球头立铣刀

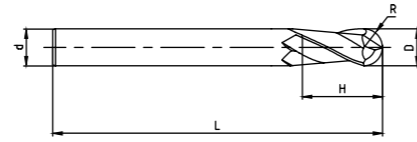

### Diameter Tolerance:

D6~D12	0,-0.02
Corner Radius Tolerance ±0.005	

Type	Basic Dimension (mm)					Number of flute Z	Geometry
	D	R	d	H	L		
OMHH-2B-060R3.0G	6.0	3.0	6	12	100	2	2
OMHH-2B-080R4.0G	8.0	4.0	8	16	100	2	2
OMHH-2B-100R5.0G	10.0	5.0	10	20	150	2	2
OMHH-2B-120R6.0G	12.0	6.0	12	24	150	2	2

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				


● Very Suitable ○ Suitable

Hardness unit: HRC

### OMHH-2B/2BH/G Cutting Parameters

Workpiece Material	Pre-hardened steel · Hardened steel 40-50HRC				Hardened steel 50-60HRC				Hardened steel 60-68HRC			
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)	Ae (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)	Ae (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)
R0.5	40000	1900	0.01	0.05	36000	1500	0.01	0.05	32000	1400	0.01	0.05
R1.0	33000	3100	0.02	0.075	26000	2100	0.02	0.075	24000	2000	0.02	0.075
R1.5	29000	4100	0.03	0.1	23000	2900	0.03	0.1	21000	2600	0.03	0.1
R2.0	22000	3900	0.04	0.15	17000	2500	0.04	0.15	15500	2100	0.04	0.15
R2.5	17500	3500	0.05	0.15	13500	2200	0.05	0.15	13000	2000	0.05	0.15
R3.0	15000	3100	0.06	0.2	11500	1700	0.06	0.2	10500	1500	0.06	0.2
R4.0	11000	2500	0.08	0.25	8600	1600	0.08	0.25	8000	1400	0.08	0.25
R5.0	9000	2000	0.1	0.3	7000	1400	0.1	0.3	6000	1200	0.1	0.3
R6.0	7500	1800	0.1	0.35	5700	1300	0.1	0.35	5300	1200	0.1	0.35
R8.0	5500	1800	0.1	0.4	4300	1300	0.1	0.4	4000	1200	0.1	0.4
R10.0	4500	1800	0.1	0.5	3500	1300	0.1	0.5	3200	1200	0.1	0.5

Max cutting depth

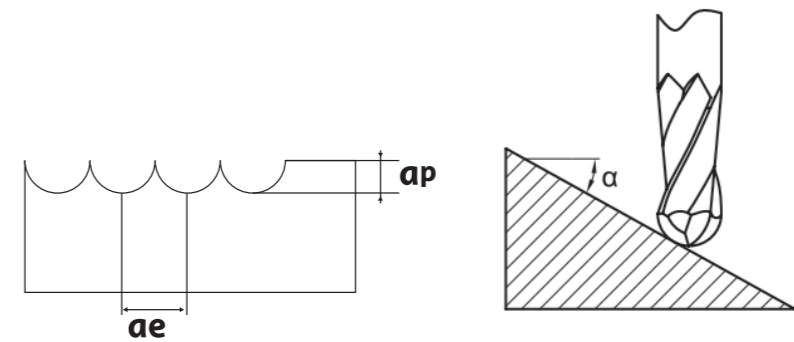

- Please select high-precision and high rigidity machine and tool holder.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Please use air cooling or MQL (minimum oil mist cooling)
- If inclination angle  $\alpha$  over  $15^\circ$ , please reduce the speed to 50%-80% of above table.
- Make overhang of tool as short as possible in conditions of non-interference.



# OMHH-4B

## 4-Flute Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D3~D20	0,-0.02
Corner Radius Tolerance ±0.005	

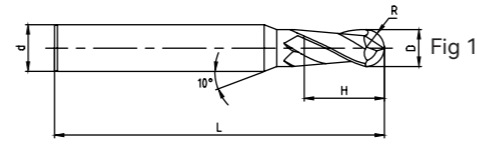

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-4B-030R1.5	3	1.5	6	6	50	4	1	●
OMHH-4B-040R2.0	4	2	6	8	50	4	1	●
OMHH-4B-050R2.5	5	2.5	6	10	50	4	1	●
OMHH-4B-060R3.0	6	3	6	12	50	4	2	●
OMHH-4B-080R4.0	8	4	8	16	60	4	2	●
OMHH-4B-100R5.0	10	5	10	20	75	4	2	●
OMHH-4B-120R6.0	12	6	12	24	75	4	2	●
OMHH-4B-140R7.0	14	7	14	28	75	4	2	●
OMHH-4B-160R8.0	16	8	16	32	100	4	2	●
OMHH-4B-180R9.0	18	9	18	36	100	4	2	●
OMHH-4B-200R10.0	20	10	20	40	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMHH-4BH

## 4-Flute Long Straight Shank Ball Nose End Mills



### Diameter Tolerance:

D3~D20	0,-0.02
Corner Radius Tolerance ±0.005	

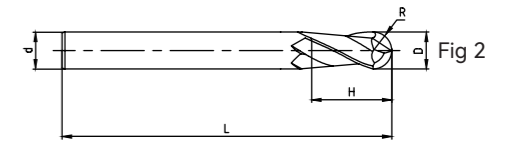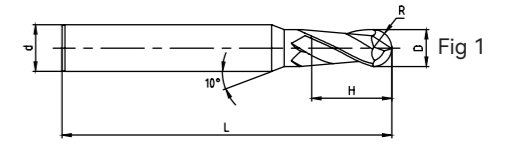

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMHH-4B-030R1.5H	3	1.5	6	6	75	4	1	●
OMHH-4B-040R2.0H	4	2	6	8	75	4	1	●
OMHH-4B-050R2.5H	5	2.5	6	10	75	4	1	●
OMHH-4B-060R3.0H	6	3	6	12	75	4	2	●
OMHH-4B-080R4.0H	8	4	8	16	100	4	2	●
OMHH-4B-100R5.0H	10	5	10	20	100	4	2	●
OMHH-4B-120R6.0H	12	6	12	24	100	4	2	●
OMHH-4B-140R7.0H	14	7	14	28	100	4	2	●
OMHH-4B-160R8.0H	16	8	16	32	150	4	2	●
OMHH-4B-180R9.0H	18	9	18	36	150	4	2	●
OMHH-4B-200R10.0H	20	10	20	40	150	4	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○	●	●	●	●	○	○				

● Very Suitable ○ Suitable

Hardness unit: HRC

OMHH-4B/4BH Cutting Parameters

Workpiece Material	Pre-hardened steel · Hardened steel 40-50HRC				Hardened steel 50-60HRC				Hardened steel 60-68HRC			
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)	Ae (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)	Ae (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Ap (mm)
R1.5	29000	6560	0.03	0.1	23000	4560	0.03	0.1	21000	4240	0.03	0.1
R2.0	22000	6250	0.04	0.15	17000	4000	0.04	0.15	15500	3520	0.04	0.15
R2.5	17500	5600	0.05	0.15	13500	3520	0.05	0.15	13000	3200	0.05	0.15
R3.0	15000	4200	0.06	0.2	11500	3000	0.06	0.2	10500	2500	0.06	0.2
R4.0	11000	3500	0.08	0.25	8600	2500	0.08	0.25	8000	2250	0.08	0.25
R5.0	9000	3000	0.1	0.3	7000	2200	0.1	0.3	6000	2000	0.1	0.3
R6.0	7500	3000	0.1	0.35	5700	2000	0.1	0.35	5300	1900	0.1	0.35
R8.0	5500	3000	0.1	0.4	4300	2000	0.1	0.4	4000	1900	0.1	0.4
R10.0	4500	3000	0.1	0.5	3500	2000	0.1	0.5	3200	1900	0.1	0.5

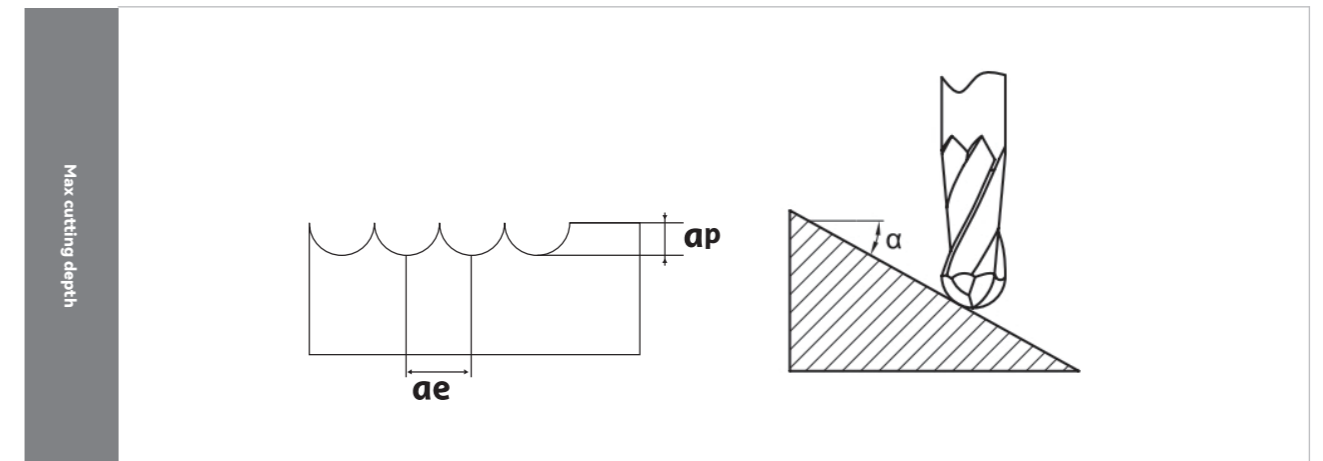

- Please select high-precision and high rigidity machine and tool holder.
- When the machine rigidity and workpiece fixture stability is low, vibration and abnormal noise may be generated. Please reduce the rotating speed and feed rate stated above correspondingly.
- Please use air cooling or MQL (minimum oil mist cooling)
- If inclination angle  $\alpha$  over  $15^\circ$ , please reduce the speed to 50%-80% of above table.
- Make overhang of tool as short as possible in conditions of non-interference.

# OMS

## SERIES FOR HIGH TEMPERATURE ALLOY

PRODUCT SERIES

**Unequal helical angel design**  
Disperse cutting force, reduce tools vibration, increase cutting performance stability, improve the chipping performance to prevent chip accumulation, improve machining efficiency and workpiece surface finish.

**High rigidity**  
Variable core thickness groove design, suitable for workpiece of weak rigidity or thin-wall processing.

**Special cutting edge design**  
Arc rake face angle changes evenly Improve the rounded corner edges wear-resistance performance

**Unequal angle design**  
Significantly reduce vibration and noise during cutting. Improve the machining surface finish performance, each tooth bears a more even load, the milling tools lifetime will be extended.

**Optimized chipbreaker design**  
Unequal rake angle design, improve the tools rigidity but no effect on the cutting force.



### PROCESSING CASE

APPLICATION CONDITIONS		CUTTING PARAMETERS	
Work piece	Engine blades	Root	S=1320 F=318 AP=15-20mm AE=1mm
Workpiece material	GH4133B		
Cutting tools	D12R6 4-flute Ball nose end mills	Face	S=1320 F=520 AP=15-20mm AE=1mm
CNC Machine	Baoji 3-axis vertical machining center without turntable		
Coolant	Water cooling		

The performance has meet the current tool life: D12R6 single face 6-7 pieces





## OMS-4E 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D2~D6	0,-0.02
D7~D20	0,-0.025

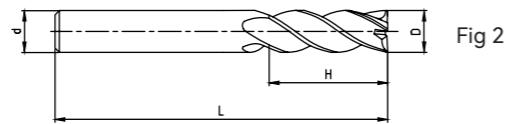

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMS-4E-020S	2	4	6	50	4	1	●
OMS-4E-040S	4	4	11	50	4	2	●
OMS-4E-060	6	6	16	50	4	2	●
OMS-4E-080	8	8	20	60	4	2	●
OMS-4E-100	10	10	25	75	4	2	●
OMS-4E-120	12	12	30	75	4	2	●
OMS-4E-140	14	14	35	90	4	2	▲
OMS-4E-160	16	16	35	90	4	2	▲
OMS-4E-200	20	20	45	100	4	2	▲


● Stock Available ▲ Make-to-order

## OMS-5E 5-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D8~D25	0,-0.025
--------	----------

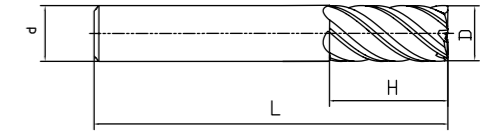

Type	Basic Dimension (mm)				Number of flute Z	Stock
	D	d	H	L		
OMS-5E-080	8	8	20	60	5	●
OMS-5E-100	10	10	25	75	5	●
OMS-5E-120	12	12	30	75	5	▲
OMS-5E-140	14	14	35	90	5	▲
OMS-5E-160	16	16	35	90	5	▲
OMS-5E-200	20	20	45	100	5	▲
OMS-5E-250	25	25	50	110	5	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable


Hardness unit: HRC

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

## OMS-6E 6-Flute Straight Shank Flat End Mills




### Diameter Tolerance:

D10~D25	0,-0.025
---------	----------

Type	Basic Dimension (mm)				Number of flute	Stock
	D	d	H	L	Z	
OMS-6E-100	10	10	25	75	6	▲
OMS-6E-120	12	12	30	75	6	▲
OMS-6E-140	14	14	35	90	6	▲
OMS-6E-160	16	16	35	90	6	▲
OMS-6E-200	20	20	45	100	6	▲
OMS-6E-250	25	25	50	110	6	▲

● Stock Available ▲ Make-to-order

## OMS-4B 4-Flute Straight Shank Ball Nose End Mills

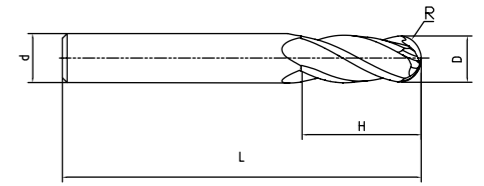

### Diameter Tolerance:

D6~D20	0,-0.02
Corner Radius Tolerance ±0.005	

Type	Basic Dimension (mm)					Number of flute	Stock
	D	R	d	H	L	Z	
OMS-4B-060R3.0	6	3	6	9	50	4	●
OMS-4B-080R4.0	8	4	8	12	60	4	●
OMS-4B-100R5.0	10	5	10	15	75	4	●
OMS-4B-120R6.0	12	6	12	18	75	4	●
OMS-4B-160R8.0	16	8	16	24	85	4	▲
OMS-4B-200R10.0	20	10	20	30	100	4	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-4R

## 4-Flute Straight Shank Corner Radius End Mills

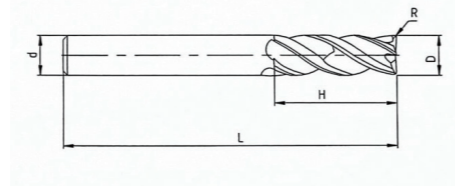

### Diameter Tolerance:

D6	0,-0.02
D7~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-4R-060R0.2	6	0.2	6	16	50	4	●
OMS-4R-060R0.3	6	0.3	6	16	50	4	●
OMS-4R-060R0.5	6	0.5	6	16	50	4	●
OMS-4R-060R0.75	6	0.75	6	16	50	4	▲
OMS-4R-060R0.8	6	0.8	6	16	50	4	▲
OMS-4R-060R1.0	6	1.0	6	16	50	4	●
OMS-4R-080R0.2	8	0.2	8	20	60	4	▲
OMS-4R-080R0.3	8	0.3	8	20	60	4	▲
OMS-4R-080R0.5	8	0.5	8	20	60	4	●
OMS-4R-080R0.6	8	0.6	8	20	60	4	▲
OMS-4R-080R0.75	8	0.75	8	20	60	4	▲
OMS-4R-080R1.0	8	1.0	8	20	60	4	●
OMS-4R-080R2.0	8	2.0	8	20	60	4	●
OMS-4R-100R0.2	10	0.2	10	25	75	4	▲
OMS-4R-100R0.3	10	0.3	10	25	75	4	▲
OMS-4R-100R0.5	10	0.5	10	25	75	4	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-4R

## 4-Flute Straight Shank Corner Radius End Mills

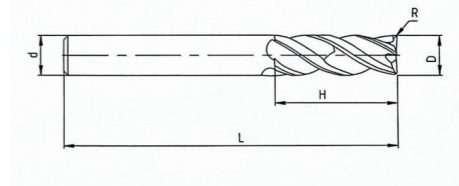

### Diameter Tolerance:

D6	0,-0.02
D7~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-4R-100R0.75	10	0.75	10	25	75	4	▲
OMS-4R-100R1.0	10	1.0	10	25	75	4	●
OMS-4R-100R1.5	10	1.5	10	25	75	4	▲
OMS-4R-100R2.0	10	2.0	10	25	75	4	▲
OMS-4R-120R0.2	12	0.2	12	30	75	4	▲
OMS-4R-120R0.3	12	0.3	12	30	75	4	▲
OMS-4R-120R0.5	12	0.5	12	30	75	4	▲
OMS-4R-120R0.75	12	0.75	12	30	75	4	▲
OMS-4R-120R1.0	12	1.0	12	30	75	4	●
OMS-4R-120R1.5	12	1.5	12	30	75	4	▲
OMS-4R-120R2.0	12	2.0	12	30	75	4	●
OMS-4R-120R2.5	12	2.5	12	30	75	4	▲
OMS-4R-120R3.0	12	3.0	12	30	75	4	▲
OMS-4R-140R0.2	14	0.2	14	35	90	4	▲
OMS-4R-140R0.3	14	0.3	14	35	90	4	▲
OMS-4R-140R0.5	14	0.5	14	35	90	4	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-4R

## 4-Flute Straight Shank Corner Radius End Mills

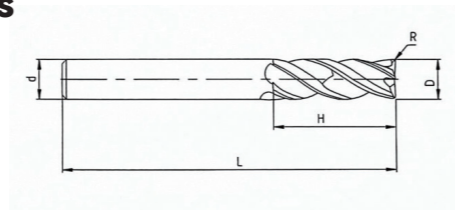

### Diameter Tolerance:

D6	0,-0.02
D7~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-4R-140R0.75	14	0.75	14	35	90	4	▲
OMS-4R-140R1.0	14	1.0	14	35	90	4	▲
OMS-4R-140R1.5	14	1.5	14	35	90	4	▲
OMS-4R-140R2.0	14	2.0	14	35	90	4	▲
OMS-4R-140R2.5	14	2.5	14	35	90	4	▲
OMS-4R-140R3.0	14	3.0	14	35	90	4	▲
OMS-4R-160R0.2	16	0.2	16	35	90	4	▲
OMS-4R-160R0.3	16	0.3	16	35	90	4	▲
OMS-4R-160R0.5	16	0.5	16	35	90	4	▲
OMS-4R-160R0.75	16	0.75	16	35	90	4	▲
OMS-4R-160R1.0	16	1.0	16	35	90	4	▲
OMS-4R-160R1.5	16	1.5	16	35	90	4	▲
OMS-4R-160R2.0	16	2.0	16	35	90	4	▲
OMS-4R-160R2.5	16	2.5	16	35	90	4	▲
OMS-4R-160R3.0	16	3.0	16	35	90	4	▲
OMS-4R-160R4.0	16	4.0	16	35	90	4	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○								○	●	

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-5R

## 5-Flute Straight Shank Corner Radius End Mills

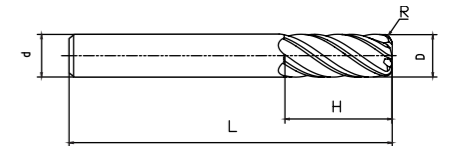

### Diameter Tolerance:

D6	0,-0.02
D7~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-5R-060R0.2	6	0.2	6	16	50	5	▲
OMS-5R-060R0.3	6	0.3	6	16	50	5	▲
OMS-5R-060R0.5	6	0.5	6	16	50	5	●
OMS-5R-060R0.75	6	0.75	6	16	50	5	▲
OMS-5R-060R1.0	6	1.0	6	16	50	5	●
OMS-5R-080R0.2	8	0.2	8	20	60	5	▲
OMS-5R-080R0.3	8	0.3	8	20	60	5	▲
OMS-5R-080R0.5	8	0.5	8	20	60	5	●
OMS-5R-080R0.75	8	0.75	8	20	60	5	▲
OMS-5R-080R1.0	8	1.0	8	20	60	5	●
OMS-5R-080R2.0	8	2.0	8	20	60	5	▲
OMS-5R-100R0.2	10	0.2	10	25	75	5	▲
OMS-5R-100R0.3	10	0.3	10	25	75	5	▲
OMS-5R-100R0.5	10	0.5	10	25	75	5	●
OMS-5R-100R0.75	10	0.75	10	25	75	5	▲
OMS-5R-100R1.0	10	1.0	10	25	75	5	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○								○	●	

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-5R

## 5-Flute Straight Shank Corner Radius End Mills

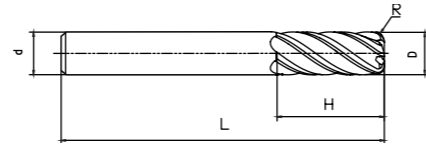

### Diameter Tolerance:

D6	0,-0.02
D7~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-5R-100R1.5	10	1.5	10	25	75	5	▲
OMS-5R-100R2.0	10	2.0	10	25	75	5	●
OMS-5R-120R0.2	12	0.2	12	30	75	5	▲
OMS-5R-120R0.3	12	0.3	12	30	75	5	▲
OMS-5R-120R0.5	12	0.5	12	30	75	5	▲
OMS-5R-120R0.75	12	0.75	12	30	75	5	▲
OMS-5R-120R1.0	12	1.0	12	30	75	5	●
OMS-5R-120R1.5	12	1.5	12	30	75	5	▲
OMS-5R-120R2.0	12	2.0	12	30	75	5	●
OMS-5R-120R2.5	12	2.5	12	30	75	5	▲
OMS-5R-120R3.0	12	3.0	12	30	75	5	▲
OMS-5R-140R0.2	14	0.2	14	35	90	5	▲
OMS-5R-140R0.3	14	0.3	14	35	90	5	▲
OMS-5R-140R0.5	14	0.5	14	35	90	5	▲
OMS-5R-140R0.75	14	0.75	14	35	90	5	▲
OMS-5R-140R1.0	14	1.0	14	35	90	5	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-5R

## 5-Flute Straight Shank Corner Radius End Mills

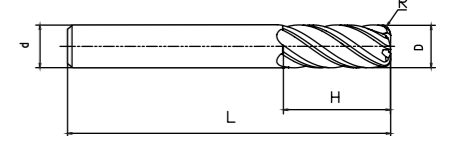

### Diameter Tolerance:

D6	0,-0.02
D7~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-5R-140R1.5	14	1.5	14	35	90	5	▲
OMS-5R-140R2.0	14	2.0	14	35	90	5	▲
OMS-5R-140R2.5	14	2.5	14	35	90	5	▲
OMS-5R-140R3.0	14	3.0	14	35	90	5	▲
OMS-5R-160R0.2	16	0.2	16	35	90	5	▲
OMS-5R-160R0.3	16	0.3	16	35	90	5	▲
OMS-5R-160R0.5	16	0.5	16	35	90	5	▲
OMS-5R-160R0.75	16	0.75	16	35	90	5	▲
OMS-5R-160R1.0	16	1.0	16	35	90	5	▲
OMS-5R-160R1.5	16	1.5	16	35	90	5	▲
OMS-5R-160R2.0	16	2.0	16	35	90	5	▲
OMS-5R-160R2.5	16	2.5	16	35	90	5	▲
OMS-5R-160R3.0	16	3.0	16	35	90	5	▲
OMS-5R-160R4.0	16	4.0	16	35	90	5	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-6R

## 6-Flute Straight Shank Corner Radius End Mills

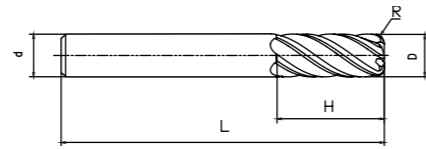

### Diameter Tolerance:

D10~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-6R-100R1.0	10	1.0	10	25	75	6	●
OMS-6R-100R2.0	10	2.0	10	25	75	6	●
OMS-6R-120R1.0	12	1.0	12	30	75	6	●
OMS-6R-120R2.0	12	2.0	12	30	75	6	●
OMS-6R-120R3.0	12	3.0	12	30	75	6	●
OMS-6R-140R1.0	14	1.0	14	35	90	6	▲
OMS-6R-140R2.0	14	2.0	14	35	90	6	▲
OMS-6R-140R3.0	14	3.0	14	35	90	6	▲
OMS-6R-160R1.0	16	1.0	16	35	90	6	▲
OMS-6R-160R2.5	16	2.5	16	35	90	6	▲
OMS-6R-160R4.0	16	4.0	16	35	90	6	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-7R

## 7-Flute Straight Shank Corner Radius End Mills

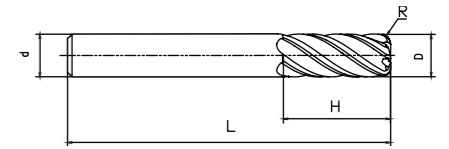

### Diameter Tolerance:

D10~D16	0,-0.025
Corner Radius Tolerance ±0.01	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-7R-100R0.2	10	0.2	10	25	75	7	▲
OMS-7R-100R0.3	10	0.3	10	25	75	7	▲
OMS-7R-100R0.5	10	0.5	10	25	75	7	▲
OMS-7R-100R0.75	10	0.75	10	25	75	7	▲
OMS-7R-100R1.0	10	1.0	10	25	75	7	▲
OMS-7R-100R1.5	10	1.5	10	25	75	7	▲
OMS-7R-100R2.0	10	2.0	10	25	75	7	▲
OMS-7R-120R0.2	12	0.2	12	30	75	7	▲
OMS-7R-120R0.3	12	0.3	12	30	75	7	▲
OMS-7R-120R0.5	12	0.5	12	30	75	7	▲
OMS-7R-120R0.75	12	0.75	12	30	75	7	▲
OMS-7R-120R1.0	12	1.0	12	30	75	7	▲
OMS-7R-120R1.5	12	1.5	12	30	75	7	▲
OMS-7R-120R2.0	12	2.0	12	30	75	7	▲
OMS-7R-120R2.5	12	2.5	12	30	75	7	▲
OMS-7R-120R3.0	12	3.0	12	30	75	7	▲
OMS-7R-140R0.2	14	0.2	14	35	90	7	▲
OMS-7R-140R0.3	14	0.3	14	35	90	7	▲

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMS-7R

## 7-Flute Straight Shank Corner Radius End Mills

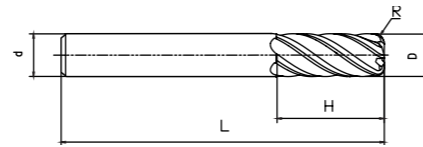

### Diameter Tolerance:

D10~D16	0,-0.025
Corner Radius Tolerance $\pm 0.01$	

Type	Basic Dimension (mm)					Number of flute Z	Stock
	D	R	d	H	L		
OMS-7R-140R0.5	14	0.5	14	35	90	7	▲
OMS-7R-140R0.75	14	0.75	14	35	90	7	▲
OMS-7R-140R1.0	14	1.0	14	35	90	7	▲
OMS-7R-140R1.5	14	1.5	14	35	90	7	▲
OMS-7R-140R2.0	14	2.0	14	35	90	7	▲
OMS-7R-140R2.5	14	2.5	14	35	90	7	▲
OMS-7R-140R3.0	14	3.0	14	35	90	7	▲
OMS-7R-160R0.2	16	0.2	16	35	90	7	▲
OMS-7R-160R0.3	16	0.3	16	35	90	7	▲
OMS-7R-160R0.5	16	0.5	16	35	90	7	▲
OMS-7R-160R0.75	16	0.75	16	35	90	7	▲
OMS-7R-160R1.0	16	1.0	16	35	90	7	▲
OMS-7R-160R1.5	16	1.5	16	35	90	7	▲
OMS-7R-160R2.0	16	2.0	16	35	90	7	▲
OMS-7R-160R2.5	16	2.5	16	35	90	7	▲
OMS-7R-160R3.0	16	3.0	16	35	90	7	▲
OMS-7R-160R4.0	16	4.0	16	35	90	7	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
○	○					○				○	●


● Very Suitable ○ Suitable

Hardness unit: HRC

### OMS-4E/-5E/-4R/-5R Cutting Parameters

Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)
6	1592	0.012-0.025
8	1195	0.013-0.029
10	955	0.016-0.035
12	796	0.016-0.038
14	682	0.018-0.041
16	597	0.018-0.045
20	478	0.018-0.049
25	382	0.019-0.051

Max cutting depth

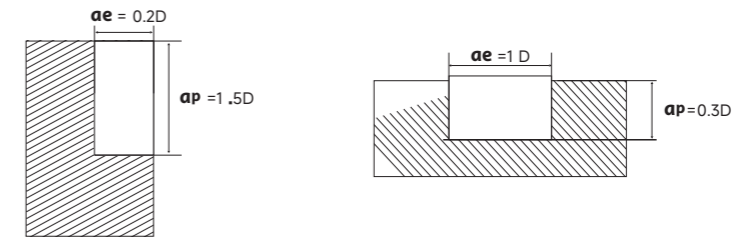


- The above table is the standard value for side milling. For grooving, the rotating speed should be 80%-100% of the above table, and the feed speed should be 60%-80% of the above table as the standard value.
- Please use high-rigidity, high-precision machine tools and tool holders, and it is recommended to use non-water-soluble cutting fluid
- Adjust the Rotating speed and Feed speed according to the cutting depth and machine tool rigidity, and down milling is recommended
- Keep the tool overhang length as short as possible without interference

OMS-6E/-6R/-7R Cutting Parameters

Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)
10	955	0.015-0.035
12	796	0.016-0.038
14	682	0.018-0.041
16	597	0.018-0.045
20	478	0.018-0.049
25	382	0.019-0.051

Max cutting depth




- The above table is the standard value for side milling. For grooving, the rotating speed should be 80%-100% of the above table, and the feed speed should be 60%-80% of the above table as the standard value.
- Please use high-rigidity, high-precision machine tools and tool holders, and it is recommended to use non-water-soluble cutting fluid
- Adjust the Rotating speed and Feed speed according to the cutting depth and machine tool rigidity, and down milling is recommended
- Keep the tool overhang length as short as possible without interference

OMS-4B 切削参数推荐表 | Parameter list

Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)
6	1858	0.02-0.05
8	1393	0.025-0.07
10	1115	0.03-0.08
12	928	0.032-0.085
16	696	0.04-0.12
20	557	0.041-0.13

Max cutting depth

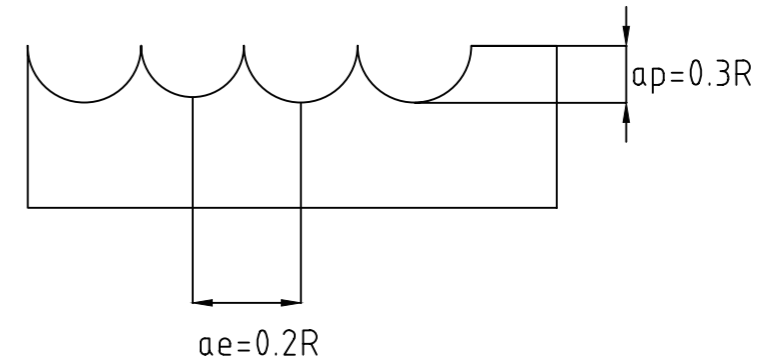

- The above table is the standard value for side milling. For grooving, the rotating speed should be 80%-100% of the above table, and the feed speed should be 60%-80% of the above table as the standard value.
- Please use high-rigidity, high-precision machine tools and tool holders, and it is recommended to use non-water-soluble cutting fluid
- Adjust the Rotating speed and Feed speed according to the cutting depth and machine tool rigidity, and down milling is recommended
- Keep the tool overhang length as short as possible without interference

# OMM

## HIGH EFFICIENCY CUTTING STAINLESS STEEL END MILLS

PRODUCT SERIES

**Double arc GASH**  
The end flute adopt unequal flute structure to increase the end milling vibration resistance of the tool. The end flute adopt a special double arc GASH structure to increase the chip space for end milling and slot milling.

**Unequal flute structure**  
The end flute adopt unequal flute structure to increase the end milling vibration resistance of the tool. The end flute adopt a special double arc GASH structure to increase the chip space for end milling and slot milling.

**High quality clearance face**

**U-shaped groove**  
The spiral groove adopts a U-shaped groove structure design to increase the chip space and facilitate chip discharge. The grinding quality of the flank of the peripheral cutting edge is high, avoiding adhesion and wear, improving the surface quality of the workpiece and the tool life.

**Coating**  
The new PVD TiAlSiN silicon-based wear-resistant composite coating is used to make the tool surface more compact and resistant to oxidation, and the hardness and toughness are improved. The coating is not easy to fall off during processing and has a long service life.

**Substrate**  
The bonding phase is designed with a unique solid solution strengthening to improve the alloy's thermal stability and resistance to sticking and tool wear. The higher bonding phase content design ensures the toughness of the carbide to meet the requirements of rough machining for the carbide crack resistance. The complete WC crystal form and uniform cobalt phase distribution further improve the toughness and strength of the carbide while ensuring the hardness of the carbide.

**Unequal helix angle**  
The groove adopts an unequal spiral structure to enhance the tool's anti-vibration performance in side milling with large cutting depth.



### PROCESSING CASE


OMM-4E-100	CONDITIONS	
	Tool	OMM-4E-100
Workpiece material	SUS304	
Processing method	Side milling	
Vc	130m/min (S4100)	
Feed rate	1230mm/min (0.3mm/rev)	
ap	24mm	
ae	0.2mm	
Cutting oil	Water-soluble cutting oil	
Machine	Vertical machining center	

## OMM-4E 4-Flute Straight Shank Flat End Mills



### Diameter Tolerance:

D1~D6	0,-0.015
D8~D20	0,-0.02

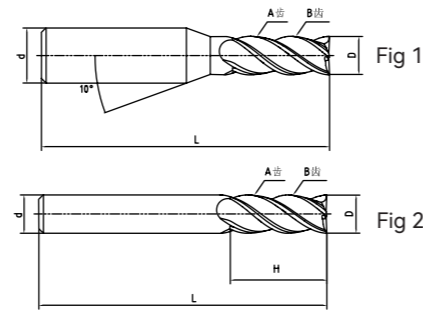

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMM-4E-010S	1.0	4	3	50	4	1	●
OMM-4E-020S	2.0	4	6	50	4	1	●
OMM-4E-030S	3.0	4	9	50	4	1	●
OMM-4E-040S	4.0	4	11	50	4	2	●
OMM-4E-040	4.0	6	11	50	4	1	●
OMM-4E-050	5.0	6	13	50	4	1	●
OMM-4E-060	6.0	6	16	50	4	2	●
OMM-4E-080	8.0	8	20	60	4	2	●
OMM-4E-100	10.0	10	25	75	4	2	●
OMM-4E-120	12.0	12	26	75	4	2	●
OMM-4E-160	16.0	16	40	100	4	2	●
OMM-4E-200	20.0	20	45	100	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	○			●	○	

● Very Suitable ○ Suitable


Hardness unit: HRC

## OMM-4R 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D2~D6	0,-0.015
D8~D20	0,-0.02
Corner Radius Tolerance ±0.01	

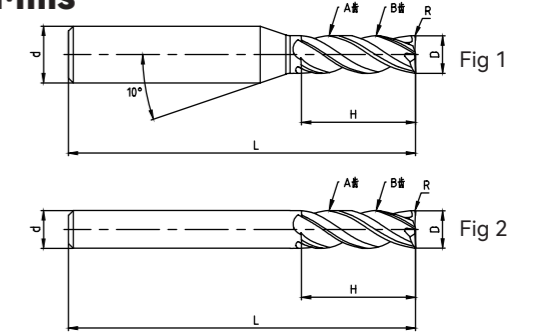

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMM-4R-020R0.2S	2.0	0.2	4	6	50	4	1	●
OMM-4R-030R0.5S	3.0	0.5	4	8	50	4	1	●
OMM-4R-040R0.5S	4.0	0.5	4	11	50	4	2	●
OMM-4R-040R0.5	4.0	0.5	6	11	50	4	1	●
OMM-4R-050R0.5	5.0	0.5	6	13	50	4	1	●
OMM-4R-060R0.5	6.0	0.5	6	16	50	4	2	●
OMM-4R-060R1.0	6.0	1.0	6	16	50	4	2	●
OMM-4R-080R0.5	8.0	0.5	8	20	60	4	2	●
OMM-4R-080R1.0	8.0	1.0	8	20	60	4	2	●
OMM-4R-100R0.5	10.0	0.5	10	25	75	4	2	●
OMM-4R-100R1.0	10.0	1.0	10	25	75	4	2	●
OMM-4R-100R2.0	10.0	2.0	10	25	75	4	2	●
OMM-4R-120R0.5	12.0	0.5	12	26	75	4	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	○			●	○	

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMM-4R

## 4-Flute Straight Shank Corner Radius End Mills



### Diameter Tolerance:

D2~D6	0,-0.02
D8~D20	0,-0.025
Corner Radius Tolerance ±0.01	

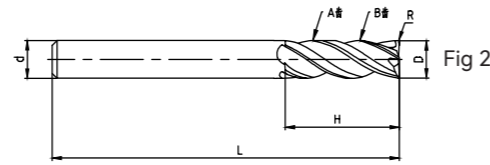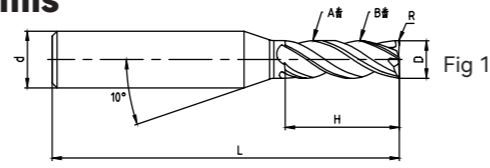

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMM-4R-120R1.0	12.0	1.0	12	26	75	4	2	●
OMM-4R-120R2.0	12.0	2.0	12	26	75	4	2	●
OMM-4R-120R3.0	12.0	3.0	16	26	75	4	2	●
OMM-4R-160R0.5	16.0	0.5	16	40	100	4	2	▲
OMM-4R-160R1.0	16.0	1.0	16	40	100	4	2	●
OMM-4R-160R1.5	16.0	1.5	16	40	100	4	2	▲
OMM-4R-160R2.0	16.0	2.0	16	40	100	4	2	●
OMM-4R-160R3.0	16.0	3.0	16	40	100	4	2	▲
OMM-4R-200R0.5	20.0	0.5	20	45	100	4	2	▲
OMM-4R-200R1.0	20.0	1.0	20	45	100	4	2	▲
OMM-4R-200R2.0	20.0	2.0	20	45	100	4	2	●
OMM-4R-200R3.0	20.0	3.0	20	45	100	4	2	▲

● Stock Available ▲ Make-to-order

Workpiece Material	Cast Iron·Carbon Steel·Alloy Steel ~30HRC		Stainless Steel		Pre-hardened Steel Hardened Steel ~40HRC		Pre-hardened Steel Hardened Steel ~50HRC		Titanium Alloy Heat-resistant Alloy	
	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)
2	40000	960	22300	350	32000	385	25000	330	9600	310
4	15500	1150	7400	350	10600	545	8500	335	4800	325
5	11500	1150	5550	445	8000	665	6500	450	3800	345
6	9500	1270	4450	445	6400	665	5000	455	3200	375
8	8000	1270	3700	470	5300	700	4200	470	2400	395
10	6000	1575	2750	500	4000	850	3200	535	1910	400
12	4800	1455	2200	520	3200	785	2500	535	1600	425
16	4000	1330	1850	520	2650	740	2100	505	1200	440
20	3000	1270	1350	535	2000	725	1600	455	960	450

- Please use a machine tool and tool holder with higher rigidity.
- Please adjust the cutting speed and feed rate appropriately according to the cutting speed, equipment rigidity, etc.
- The above table is formulated when the tool overhang is less than 4 times of the diameter. If the tool overhang is too long, vibration is likely to occur during processing. At this time, please adjust the speed, feed rate and cutting depth appropriately.

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●	●		●	○			●	○	

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMAL

## END MILL SERIES FOR ALUMINIUM MACHINING

PRODUCT SERIES

**Sharp cutting edge at 90° angle**  
Vertical 90° angle clearing can be achieved with the correct milling parameters and process flow.

**Ultra-fine grain carbide rod material**  
Easier for tools to achieve excellent edge grinding and processing performance.

**Optimized V-groove**  
Excellent chip evacuation and heat dissipation performance.

**Peripheral edge trimming and shock-absorbing edge design**  
The processing stability and the surface quality can be improved by the design of the peripheral edge trimming and shock-absorbing edge and it is suitable for processing with high surface requirements.

Prevents the occurrence of built-up edge  
Excellent edge grinding and processing performance



### PROCESSING CASE



CONDITIONS	
Tool	ME2AL-D7X23X65X8
Workpiece Material	Car luggage rack
Speed	10000r/min
Feed	1500mm/min
Ap	Ap=10mm
Ae	Ae=1mm
Cutting Method	Side Milling
Cooling Type	Air Cooling



# OMAL-2E

## 2-Flutes Straight Shank Flat End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
--------	---------



Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-2E-010S	1.0	4	3	50	2	1	●
OMAL-2E-015S	1.5	4	4	50	2	1	●
OMAL-2E-020S	2.0	4	6	50	2	1	●
OMAL-2E-025S	2.5	4	8	50	2	1	▲
OMAL-2E-030S	3.0	4	9	50	2	1	●
OMAL-2E-035S	3.5	4	10	50	2	1	▲
OMAL-2E-040S	4.0	4	10	50	2	2	●
OMAL-2E-040	4.0	6	10	50	2	1	●
OMAL-2E-045	4.5	6	11	50	2	1	▲
OMAL-2E-050	5.0	6	13	50	2	1	●
OMAL-2E-055	5.5	6	14	50	2	1	▲

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMAL-2E

## 2-Flutes Straight Shank Flat End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
--------	---------

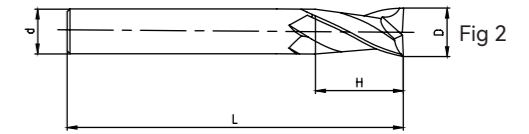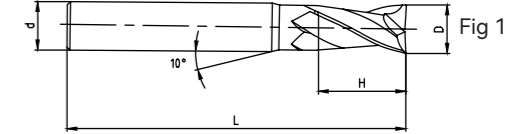

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-2E-060	6.0	6	16	50	2	2	●
OMAL-2E-070	7.0	8	18	60	2	1	▲
OMAL-2E-080	8.0	8	20	60	2	2	●
OMAL-2E-090	9.0	10	23	75	2	1	▲
OMAL-2E-100	10.0	10	25	75	2	2	●
OMAL-2E-120	12.0	12	30	75	2	2	●
OMAL-2E-140	14.0	14	32	75	2	2	●
OMAL-2E-160	16.0	16	36	100	2	2	●
OMAL-2E-180	18.0	18	38	100	2	2	●
OMAL-2E-200	20.0	20	45	100	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMAL-2EL

## 2-Flutes Straight Shank Long Flat End Mill



### Diameter Tolerance:

D3~D20	0,-0.02
--------	---------

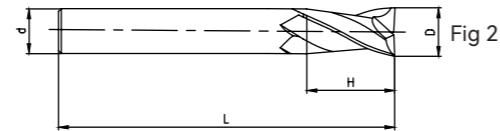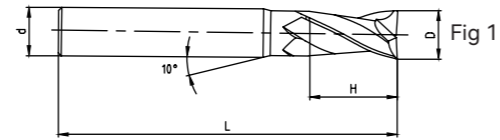

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-2E-030L	3.0	6	12	60	2	1	●
OMAL-2E-040L	4.0	6	16	60	2	1	●
OMAL-2E-050L	5.0	6	20	60	2	1	●
OMAL-2E-060L	6.0	6	25	75	2	2	●
OMAL-2E-080L	8.0	8	32	75	2	2	●
OMAL-2E-100L	10.0	10	45	100	2	2	●
OMAL-2E-120L	12.0	12	45	100	2	2	●
OMAL-2E-140L	14.0	14	50	100	2	2	●
OMAL-2E-160L	16.0	16	65	150	2	2	●
OMAL-2E-200L	20.0	20	75	150	2	2	●

● Stock Available ▲ Make-to-order



# OMAL-2EH

## 2-Flutes Long Flat End Mill



### Diameter Tolerance:

D3~D20	0,-0.02
--------	---------

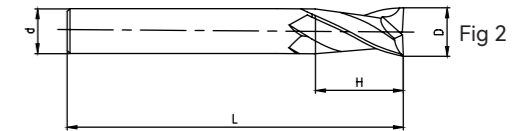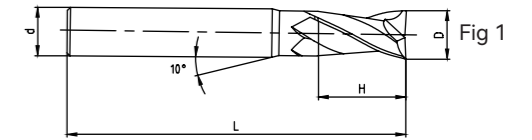

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-2E-030H	3.0	6	9	75	2	1	●
OMAL-2E-030SH	3.0	4	9	75	2	1	●
OMAL-2E-040H	4.0	6	10	75	2	1	●
OMAL-2E-040SH	4.0	4	10	75	2	2	●
OMAL-2E-050H	5.0	6	13	75	2	1	●
OMAL-2E-060H	6.0	6	16	75	2	2	●
OMAL-2E-080H	8.0	8	20	75	2	2	●
OMAL-2E-100H	10.0	10	25	100	2	2	●
OMAL-2E-120H	12.0	12	30	100	2	2	●
OMAL-2E-140H	14.0	14	32	100	2	2	●
OMAL-2E-160H	16.0	16	36	150	2	2	●
OMAL-2E-200H	20.0	20	45	150	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMAL-2EG

## 2-Flutes Extra Long Flat End Mill

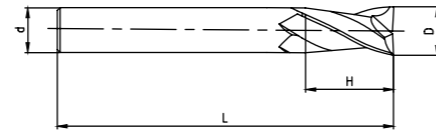


### Diameter Tolerance:

D6~D14	0,-0.02
--------	---------

Type	Basic Dimension (mm)				Number of flute	Stock
	D	d	H	L	Z	
OMAL-2E-060G	6.0	6	16	100	2	●
OMAL-2E-080G	8.0	8	20	100	2	●
OMAL-2E-100G	10.0	10	25	150	2	●
OMAL-2E-120G	12.0	12	30	150	2	●
OMAL-2E-140G	14.0	14	32	150	2	●

● Stock Available ▲ Make-to-order

OMAL-2E/2EL, H, G Cutting Parameters				
Workpiece Material	Aluminum Alloy		Silicon Aluminum Alloy Si=10%	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	650	40000	500
2	40000	950	32000	750
3	26500	1250	21000	1000
4	20000	1400	16000	1100
5	16000	1500	13000	1100
6	13000	1500	10600	1100
8	10000	1600	8000	1250
10	8000	1600	6500	1250
12	6600	1650	5300	1300
14	5700	1700	4600	1350
16	5000	1700	4000	1350
18	4400	1700	3500	1350
20	4000	1700	3200	1350

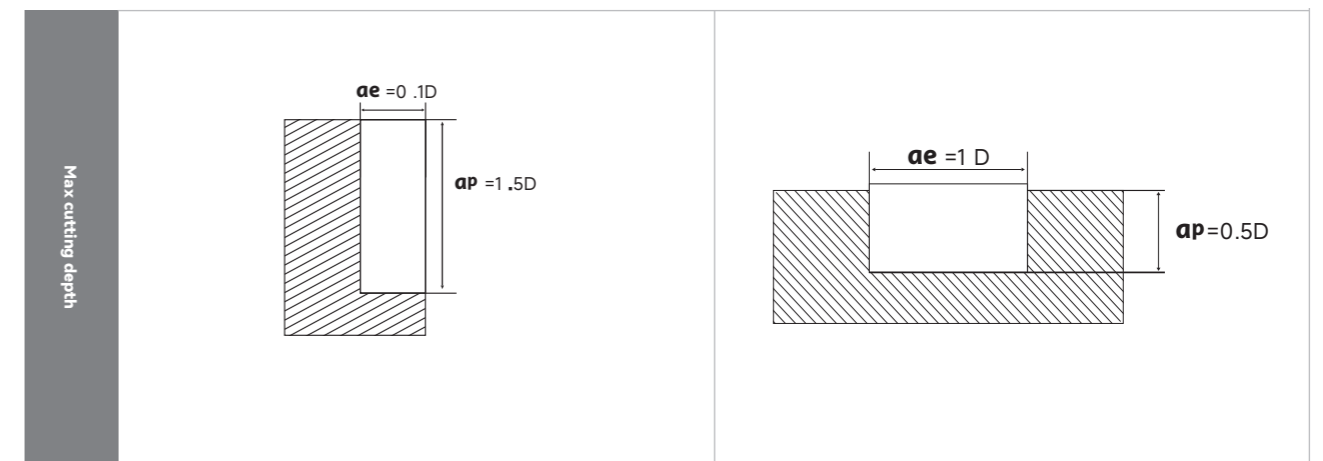

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

- The table above is based on baseline values for side milling. Slotting cutting conditions are based on 70% of the feed rate in the table above.
- Please use machine tools and tool holders with high rigidity and precision. When the machine tool and work-piece are installed with poor rigidity, vibration and abnormal sounds will occur. In this case, the rotation speed and feed recommended in the above table should be reduced proportionately.
- The rotation speed and feed rate can be increased proportionately when the cutting depth is small.
- Please use water-soluble cutting fluid.
- Side milling is recommended for conventional milling.
- Keep the overhang length of the tool as short as possible without interference.



# OMAL-3E

## 3-Flutes Straight Shank Flat End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
--------	---------



Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-3E-010S	1.0	4	3	50	3	1	●
OMAL-3E-015S	1.5	4	4	50	3	1	●
OMAL-3E-020S	2.0	4	6	50	3	1	●
OMAL-3E-025S	2.5	4	8	50	3	1	▲
OMAL-3E-030S	3.0	4	9	50	3	1	●
OMAL-3E-030F	3.0	3	9	50	3	2	●
OMAL-3E-035S	3.5	4	10	50	3	1	▲
OMAL-3E-040S	4.0	4	10	50	3	2	●
OMAL-3E-040	4.0	6	10	50	3	1	●
OMAL-3E-045	4.5	6	11	50	3	1	▲
OMAL-3E-050	5.0	6	13	50	3	1	●

● Stock Available ▲ Make-to-order



# OMAL-3E

## 3-Flutes Straight Shank Flat End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
--------	---------

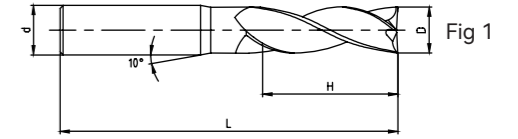

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-3E-055	5.5	6	14	50	3	1	▲
OMAL-3E-060	6.0	6	16	50	3	2	●
OMAL-3E-070	7.0	8	18	60	3	1	▲
OMAL-3E-080	8.0	8	20	60	3	2	●
OMAL-3E-090	9.0	10	23	75	3	1	▲
OMAL-3E-100	10.0	10	25	75	3	2	●
OMAL-3E-120	12.0	12	30	75	3	2	●
OMAL-3E-140	14.0	14	32	75	3	2	●
OMAL-3E-160	16.0	16	36	100	3	2	●
OMAL-3E-180	18.0	18	38	100	3	2	●
OMAL-3E-200	20.0	20	45	100	3	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMAL-3ET

## 3d 3-Flutes Straight Shank Flat End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
--------	---------



Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-3E-010TS	1.0	4	3	50	3	1	●
OMAL-3E-015TS	1.5	4	4.5	50	3	1	●
OMAL-3E-020TS	2.0	4	6	50	3	1	●
OMAL-3E-025TS	2.5	4	7.5	50	3	1	▲
OMAL-3E-030TS	3.0	4	9	50	3	1	●
OMAL-3E-030TF	3.0	3	9	50	3	2	●
OMAL-3E-035TS	3.5	4	10.5	50	3	1	▲
OMAL-3E-040TS	4.0	4	12	50	3	2	●
OMAL-3E-040T	4.0	6	12	50	3	1	●
OMAL-3E-045T	4.5	6	13.5	50	3	1	▲
OMAL-3E-050T	5.0	6	15	50	3	1	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMAL-3ET

## 3d 3-Flutes Straight Shank Flat End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
--------	---------

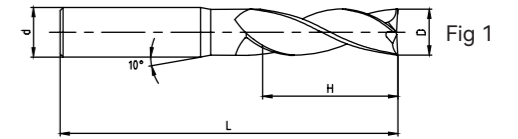

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-3E-055T	5.5	6	16.5	50	3	1	▲
OMAL-3E-060T	6.0	6	18	50	3	2	●
OMAL-3E-070T	7.0	8	21	60	3	1	▲
OMAL-3E-080T	8.0	8	24	60	3	2	●
OMAL-3E-100T	10.0	10	30	75	3	2	●
OMAL-3E-120T	12.0	12	36	75	3	2	●
OMAL-3E-140T	14.0	14	42	100	3	2	●
OMAL-3E-160T	16.0	16	48	100	3	2	●
OMAL-3E-180T	18.0	18	54	150	3	2	●
OMAL-3E-200T	20.0	20	60	150	3	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable



Hardness unit: HRC

## OMAL-3EL 3-Flutes Straight Shank Long Flat End Mill



### Diameter Tolerance:

D3~D20	0,-0.02
--------	---------

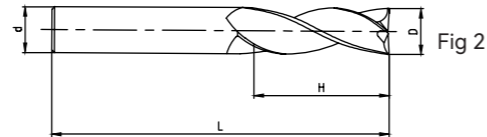

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-3E-030L	3.0	6	12	60	3	1	●
OMAL-3E-040L	4.0	6	15	60	3	1	●
OMAL-3E-050L	5.0	6	20	60	3	1	●
OMAL-3E-060L	6.0	6	25	75	3	2	●
OMAL-3E-080L	8.0	8	32	75	3	2	●
OMAL-3E-100L	10.0	10	45	100	3	2	●
OMAL-3E-120L	12.0	12	45	100	3	2	●
OMAL-3E-140L	14.0	14	50	100	3	2	●
OMAL-3E-160L	16.0	16	65	150	3	2	●
OMAL-3E-200L	20.0	20	75	150	3	2	●



● Stock Available ▲ Make-to-order

## OMAL-3EH 3-Flutes Long Flat End Mill



### Diameter Tolerance:

D3~D20	0,-0.02
--------	---------

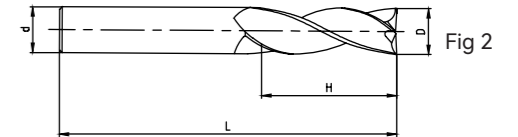

Type	Basic Dimension (mm)				Number of flute Z	Geometry	Stock
	D	d	H	L			
OMAL-3E-030H	3.0	6	9	75	3	1	●
OMAL-3E-030SH	3.0	4	9	75	3	1	●
OMAL-3E-030FH	3.0	3	9	75	3	2	●
OMAL-3E-040H	4.0	6	10	75	3	1	●
OMAL-3E-040SH	4.0	4	10	75	3	2	●
OMAL-3E-050H	5.0	6	13	75	3	1	●
OMAL-3E-060H	6.0	6	16	75	3	2	●
OMAL-3E-080H	8.0	8	20	75	3	2	●
OMAL-3E-100H	10.0	10	25	100	3	2	●
OMAL-3E-120H	12.0	12	30	100	3	2	●
OMAL-3E-140H	14.0	14	32	100	3	2	●
OMAL-3E-160H	16.0	16	36	150	3	2	●
OMAL-3E-200H	20.0	20	45	150	3	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMAL-3EG

## 3-Flutes Extra Long Flat End Mill

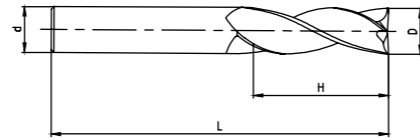

### Diameter Tolerance:

D6~D14	0,-0.02
--------	---------

Type	Basic Dimension (mm)				Number of flute	Stock
	D	d	H	L	Z	
OMAL-3E-060G	6.0	6	16	100	3	●
OMAL-3E-080G	8.0	8	20	100	3	●
OMAL-3E-100G	10.0	10	25	150	3	●
OMAL-3E-120G	12.0	12	30	150	3	●
OMAL-3E-140G	14.0	14	32	150	3	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		



● Very Suitable ○ Suitable

Hardness unit: HRC

OMAL-3E/3ET、L、H、G Cutting parameters

Workpiece Material	Aluminum Alloy		Silicon aluminum alloy Si=10%	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	800	40000	600
2	40000	1200	32000	900
3	26500	1500	21000	1200
4	20000	1650	16000	1300
5	16000	1750	13000	1300
6	13000	1800	10600	1300
8	10000	1900	8000	1500
10	8000	1950	6500	1500
12	6600	2000	5300	1550
14	5700	2000	4600	1600
16	5000	2000	4000	1600
18	4400	2000	3500	1600
20	4000	2000	3200	1600

Max Cutting Depth

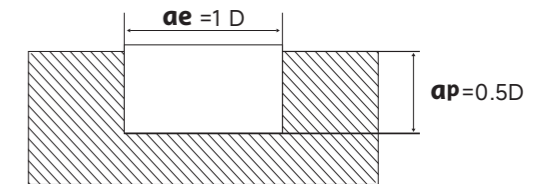

- The table above is based on baseline values for side milling. Slotting cutting conditions are based on 70% of the feed rate in the table above.
- Please use machine tools and tool holders with high rigidity and precision. When the machine tool and work-piece are installed with poor rigidity, vibration and abnormal sounds will occur. In this case, the rotation speed and feed recommended in the above table should be reduced proportionately.
- The rotation speed and feed rate can be increased proportionately when the cutting depth is small.
- Please use water-soluble cutting fluid.
- Side milling is recommended for conventional milling.
- Keep the overhang length of the tool as short as possible without interference.

# OMAL-2RT

## 3d 2-Flutes Straight Shank Corner Radius End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.02	




Fig 1




Fig 2

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMAL-2R-010R0.1TS	1.0	0.1	4	3	50	2	1	●
OMAL-2R-015R0.2TS	1.5	0.2	4	5	50	2	1	●
OMAL-2R-020R0.2TS	2.0	0.2	4	6	50	2	1	●
OMAL-2R-030R0.3TS	3.0	0.3	4	9	50	2	1	●
OMAL-2R-030R0.5TS	3.0	0.5	4	9	50	2	1	●
OMAL-2R-040R0.2TS	4.0	0.2	4	12	50	2	2	●
OMAL-2R-040R0.5TS	4.0	0.5	4	12	50	2	2	●
OMAL-2R-040R1.0TS	4.0	1.0	4	12	50	2	2	●
OMAL-2R-050R0.2T	5.0	0.2	6	15	50	2	1	●
OMAL-2R-050R0.3T	5.0	0.3	6	15	50	2	1	●
OMAL-2R-050R0.5T	5.0	0.5	6	15	50	2	1	●
OMAL-2R-050R1.0T	5.0	1.0	6	15	50	2	1	●
OMAL-2R-060R0.5T	6.0	0.5	6	18	50	2	2	●
OMAL-2R-060R1.0T	6.0	1.0	6	18	50	2	2	●
OMAL-2R-060R2.0T	6.0	2.0	6	18	50	2	2	●
OMAL-2R-080R0.5T	8.0	0.5	8	24	60	2	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

# OMAL-2RT

## 3d 2-Flutes Straight Shank Corner Radius End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.02	

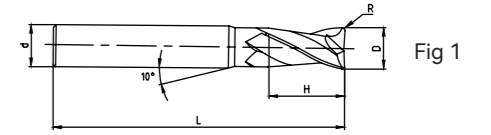


Fig 1

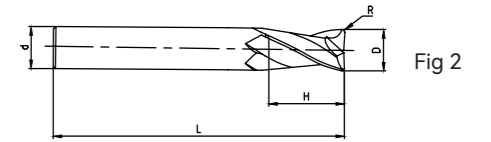


Fig 2

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMAL-2R-080R1.0T	8.0	1.0	8	24	60	2	2	●
OMAL-2R-080R2.0T	8.0	2.0	8	24	60	2	2	●
OMAL-2R-100R0.5T	10.0	0.5	10	30	75	2	2	●
OMAL-2R-100R1.0T	10.0	1.0	10	30	75	2	2	●
OMAL-2R-100R2.0T	10.0	2.0	10	30	75	2	2	●
OMAL-2R-120R0.5T	12.0	0.5	12	36	75	2	2	●
OMAL-2R-120R1.0T	12.0	1.0	12	36	75	2	2	●
OMAL-2R-120R2.0T	12.0	2.0	12	36	75	2	2	●
OMAL-2R-160R0.5T	16.0	0.5	16	48	100	2	2	●
OMAL-2R-160R1.0T	16.0	1.0	16	48	100	2	2	●
OMAL-2R-160R2.0T	16.0	2.0	16	48	100	2	2	●
OMAL-2R-160R3.0T	16.0	3.0	16	48	100	2	2	●
OMAL-2R-200R0.5T	20.0	0.5	20	60	150	2	2	●
OMAL-2R-200R1.0T	20.0	1.0	20	60	150	2	2	●
OMAL-2R-200R2.0T	20.0	2.0	20	60	150	2	2	●
OMAL-2R-200R3.0T	20.0	3.0	20	60	150	2	2	●


● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

OMAL-2R Cutting Parameters				
Workpiece Material	Aluminum Alloy		Silicon aluminum alloy Si=10%	
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )
1	40000	650	40000	500
2	40000	950	32000	750
3	26500	1250	21000	1000
4	20000	1400	16000	1100
5	16000	1500	13000	1100
6	13000	1500	10600	1100
8	10000	1600	8000	1250
10	8000	1600	6500	1250
12	6600	1650	5300	1300
14	5700	1700	4600	1350
16	5000	1700	4000	1350
18	4400	1700	3500	1350
20	4000	1700	3200	1350

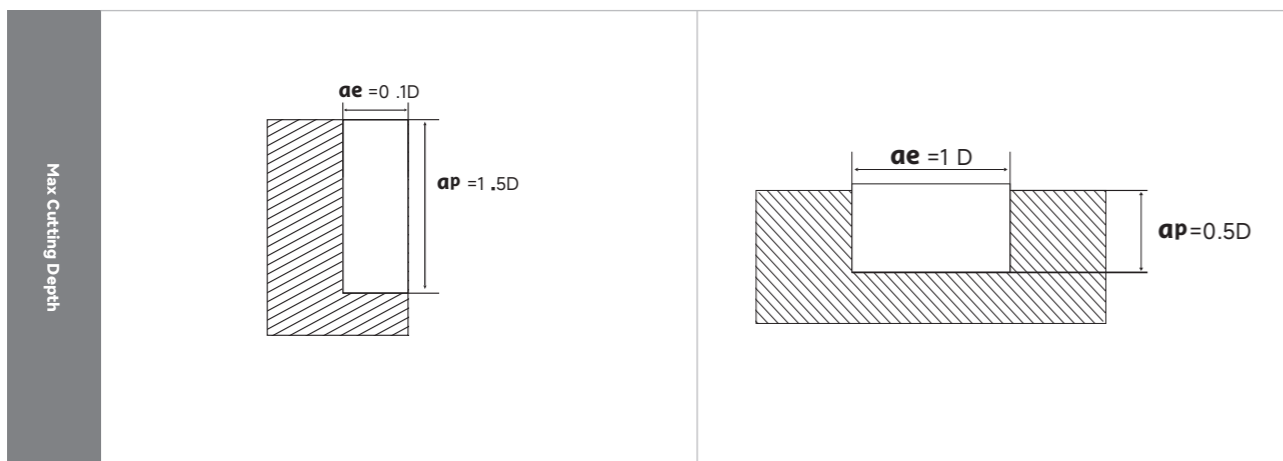



- The table above is based on baseline values for side milling. Slotting cutting conditions are based on 70% of the feed rate in the table above.
- Please use machine tools and tool holders with high rigidity and precision. When the machine tool and work-piece are installed with poor rigidity, vibration and abnormal sounds will occur. In this case, the rotation speed and feed recommended in the above table should be reduced proportionately.
- The rotation speed and feed rate can be increased proportionately when the cutting depth is small.
- Please use water-soluble cutting fluid.
- Side milling is recommended for conventional milling.
- Keep the overhang length of the tool as short as possible without interference.

## OMAL-3RT 3d 3-Flutes Straight Shank Corner Radius End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance ±0.02	

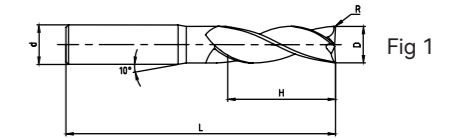

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMAL-3R-010R0.1TS	1.0	0.1	4	3	50	3	1	●
OMAL-3R-015R0.2TS	1.5	0.2	4	5	50	3	1	●
OMAL-3R-020R0.2TS	2.0	0.2	4	6	50	3	1	●
OMAL-3R-030R0.3TS	3.0	0.3	4	9	50	3	1	●
OMAL-3R-030R0.5TS	3.0	0.5	4	9	50	3	1	●
OMAL-3R-040R0.2TS	4.0	0.2	4	12	50	3	2	●
OMAL-3R-040R0.5TS	4.0	0.5	4	12	50	3	2	●
OMAL-3R-040R1.0TS	4.0	1.0	4	12	50	3	2	●
OMAL-3R-050R0.2T	5.0	0.2	6	15	50	3	1	●
OMAL-3R-050R0.5T	5.0	0.5	6	15	50	3	1	●
OMAL-3R-050R1.0T	5.0	1.0	6	15	50	3	1	●
OMAL-3R-060R0.5T	6.0	0.5	6	18	50	3	2	●
OMAL-3R-060R1.0T	6.0	1.0	6	18	50	3	2	●
OMAL-3R-060R2.0T	6.0	2.0	6	18	50	3	2	●
OMAL-3R-080R0.5T	8.0	0.5	8	24	60	3	2	●
OMAL-3R-080R1.0T	8.0	1.0	8	24	60	3	2	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC



# OMAL-3RT

## 3d 3-Flutes Straight Shank Corner Radius End Mill



### Diameter Tolerance:

D1~D20	0,-0.02
Corner Radius Tolerance $\pm 0.02$	

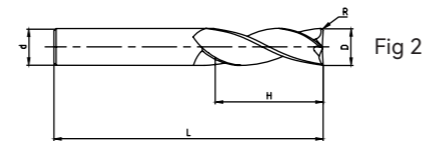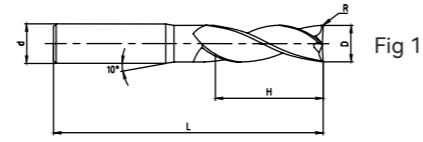

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMAL-3R-080R2.0T	8.0	2.0	8	24	60	3	2	●
OMAL-3R-100R0.5T	10.0	0.5	10	30	75	3	2	●
OMAL-3R-100R1.0T	10.0	1.0	10	30	75	3	2	●
OMAL-3R-100R2.0T	10.0	2.0	10	30	75	3	2	●
OMAL-3R-120R0.5T	12.0	0.5	12	36	75	3	2	●
OMAL-3R-120R1.0T	12.0	1.0	12	36	75	3	2	●
OMAL-3R-120R2.0T	12.0	1.0	12	36	75	3	2	●
OMAL-3R-160R0.5T	16.0	0.5	16	48	100	3	2	●
OMAL-3R-160R1.0T	16.0	1.0	16	48	100	3	2	●
OMAL-3R-160R2.0T	16.0	2.0	16	48	100	3	2	●
OMAL-3R-160R3.0T	16.0	3.0	16	48	100	3	2	●
OMAL-3R-200R0.5T	20.0	0.5	20	60	150	3	2	●
OMAL-3R-200R1.0T	20.0	1.0	20	60	150	3	2	●
OMAL-3R-200R2.0T	20.0	2.0	20	60	150	3	2	●
OMAL-3R-200R3.0T	20.0	3.0	20	60	150	3	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

OMAL-3RT 系列切削参数表 | Parameter list

Workpiece Material	Aluminum alloy		Silicon aluminum alloy Si=10%		
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)
1		40000	800	40000	600
2		40000	1200	32000	900
3		26500	1500	21000	1200
4		20000	1650	16000	1300
5		16000	1750	13000	1300
6		13000	1800	10600	1300
8		10000	1900	8000	1500
10		8000	1950	6500	1500
12		6600	2000	5300	1550
14		5700	2000	4600	1600
16		5000	2000	4000	1600
18		4400	2000	3500	1600
20		4000	2000	3200	1600

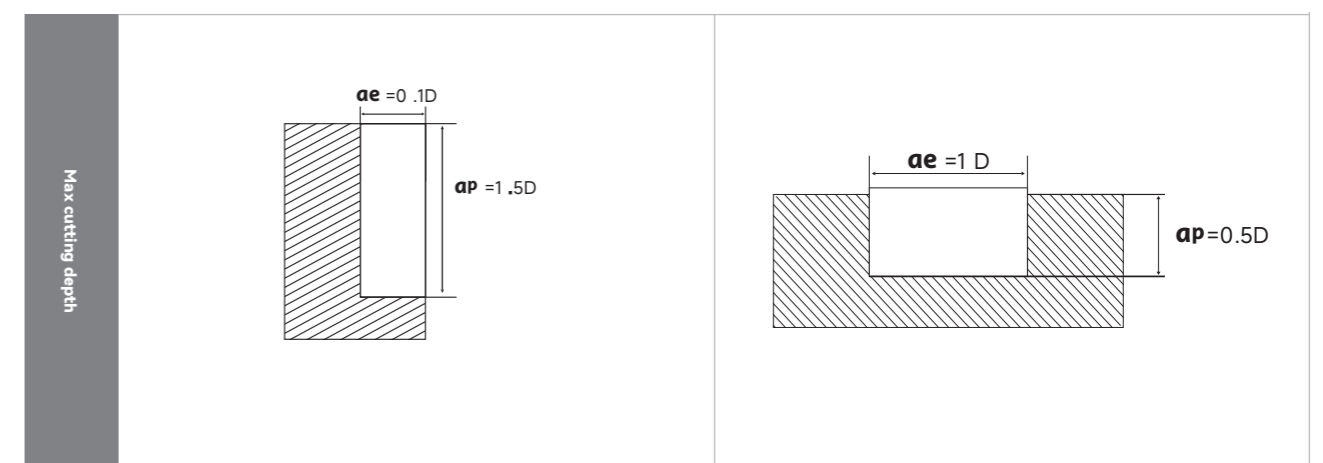

- The table above is based on baseline values for side milling. Slotting cutting conditions are based on 70% of the feed rate in the table above.
- Please use machine tools and tool holders with high rigidity and precision. When the machine tool and work-piece are installed with poor rigidity, vibration and abnormal sounds will occur. In this case, the rotation speed and feed recommended in the above table should be reduced proportionately.
- The rotation speed and feed rate can be increased proportionately when the cutting depth is small.
- Please use water-soluble cutting fluid.
- Side milling is recommended for conventional milling.
- Keep the overhang length of the tool as short as possible without interference.



# OMAL-2B

## 2-Flutes Straight Shank Ball End Mill



### Diameter Tolerance:

D1~D6	0,-0.02
Corner Radius Tolerance $\pm 0.05$	

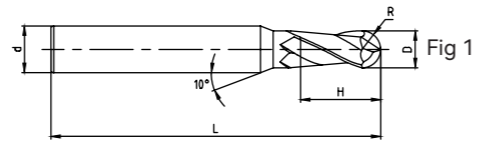

Type	Basic Dimension (mm)					Number of flute Z	Geometry	Stock
	D	R	d	H	L			
OMAL-2B-010R0.5S	1.0	0.5	4	2	50	2	1	●
OMAL-2B-020R1.0S	2.0	1.0	4	4	50	2	1	●
OMAL-2B-030R1.5S	3.0	1.5	4	6	50	2	1	●
OMAL-2B-030R1.5	3.0	1.5	6	6	50	2	1	●
OMAL-2B-040R2.0S	4.0	2.0	4	8	50	2	2	●
OMAL-2B-040R2.0	4.0	2.0	6	8	50	2	1	●
OMAL-2B-050R2.5	5.0	2.5	6	10	50	2	1	●
OMAL-2B-060R3.0	6.0	3.0	6	12	50	2	2	●
OMAL-2B-070R3.5	7.0	3.5	8	14	60	2	1	▲
OMAL-2B-080R4.0	8.0	4.0	8	16	60	2	2	●
OMAL-2B-090R4.5	9.0	4.5	10	18	75	2	1	▲
OMAL-2B-100R5.0	10.0	5.0	10	20	75	2	2	●
OMAL-2B-120R6.0	12.0	6.0	12	24	75	2	2	●
OMAL-2B-160R8.0	16.0	8.0	16	32	100	2	2	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast iron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
								○	●		

● Very Suitable ○ Suitable

Hardness unit: HRC

OMAL-2B Cutting Parameters

Workpiece Material	Aluminum alloy		Silicon aluminum alloy Si=10%		
	Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)	Rotating Speed (min <sup>-1</sup> )	Feed Speed (mm/min)
R0.5		19000	950	19000	860
R1.0		15900	1600	15900	1430
R1.5		13000	1800	13000	1500
R2.0		11900	1900	11900	1720
R2.5		16000	2300	16000	2050
R3.0		10600	2500	10600	2300
R4.0		8000	2700	8000	2300
R5.0		7950	3200	7950	2850
R6.0		7950	3800	7950	3450
R8.0		7000	4450	7000	4010

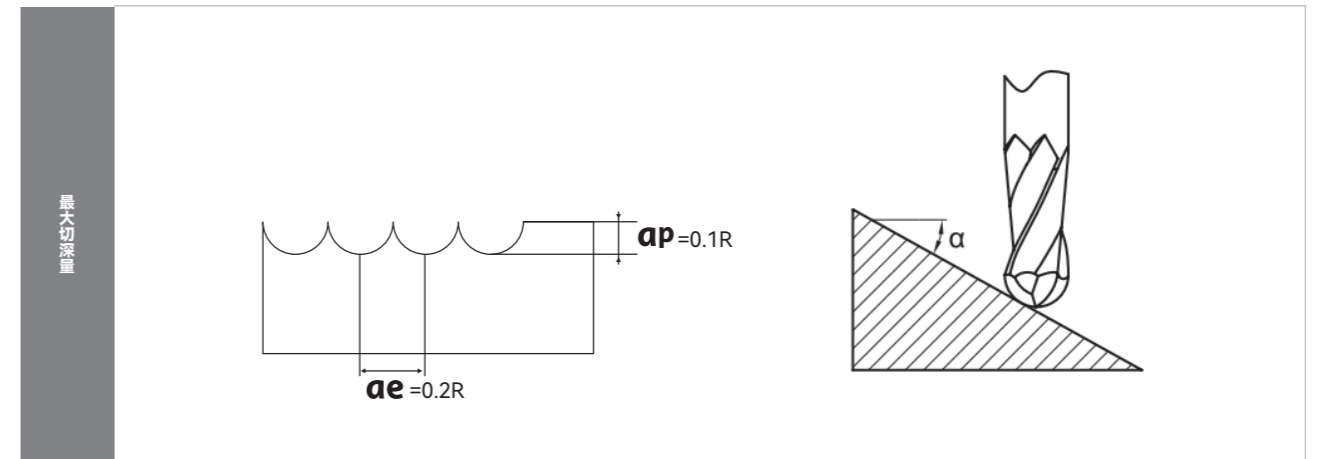

- The table above is based on baseline values for side milling. Slotting cutting conditions are based on 70% of the feed rate in the table above.
- Please use machine tools and tool holders with high rigidity and precision. When the machine tool and work-piece are installed with poor rigidity, vibration and abnormal sounds will occur. In this case, the rotation speed and feed recommended in the above table should be reduced proportionately.
- The rotation speed and feed rate can be increased proportionately when the cutting depth is small.
- Please use water-soluble cutting fluid.
- Side milling is recommended for conventional milling.
- Keep the overhang length of the tool as short as possible without interference.

# ODP

## DRILL SERIES FOR HIGH-PERFORMANCE GENERAL MACHINING

PRODUCT SERIES




**Drill Tip Geometry**  
Drill tip chamfer design to prevent tip chipping. Reduce burr formation at the exit. Double-stage top angle design to reduce cutting resistance.

**Optimization of Chip Breaker**  
Multi-segment arc chip breaker. Ensure sufficient strength while providing a larger chip clearance space.

**Cutting Edge**  
The optimized crescent cutting edge and strengthened horizontal edge design. Enables good hole accuracy and chip handling. More applicable to cast iron and universal steel parts.

**Substrate + Coating**  
Ultra-fine grain (0.8 μm) tungsten carbide + binder phase substrate. The specialized nano composite coating of AlCrN/TiSiN for the new generation drills for general machining. It has excellent wear resistance, heat resistance and solubility resistance.

### APPLICATION PARTS

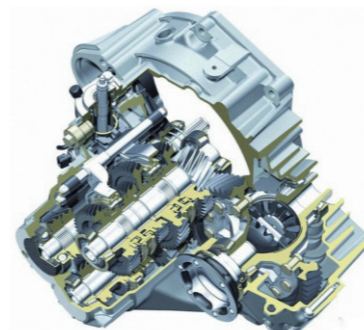

Automotive high-pressure fuel rail




Automotive engine crankcase



Flange plate

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E0300	External cooling	3.0	20	6	36	62	●
ODP-03E0310	External cooling	3.1	20	6	36	62	●
ODP-03E0320	External cooling	3.2	20	6	36	62	●
ODP-03E0330	External cooling	3.3	20	6	36	62	●
ODP-03E0340	External cooling	3.4	20	6	36	62	●
ODP-03E0350	External cooling	3.5	20	6	36	62	●
ODP-03E0360	External cooling	3.6	20	6	36	62	●
ODP-03E0370	External cooling	3.7	20	6	36	62	●
ODP-03E0380	External cooling	3.8	24	6	36	66	●
ODP-03E0390	External cooling	3.9	24	6	36	66	●
ODP-03E0400	External cooling	4.0	24	6	36	66	●
ODP-03E0410	External cooling	4.1	24	6	36	66	●
ODP-03E0420	External cooling	4.2	24	6	36	66	●
ODP-03E0430	External cooling	4.3	24	6	36	66	●
ODP-03E0440	External cooling	4.4	24	6	36	66	●
ODP-03E0450	External cooling	4.5	24	6	36	66	●
ODP-03E0460	External cooling	4.6	24	6	36	66	●
ODP-03E0470	External cooling	4.7	24	6	36	66	●
ODP-03E0480	External cooling	4.8	28	6	36	66	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E0490	External cooling	4.9	28	6	36	66	●
ODP-03E0500	External cooling	5.0	28	6	36	66	●
ODP-03E0510	External cooling	5.1	28	6	36	66	●
ODP-03E0520	External cooling	5.2	28	6	36	66	●
ODP-03E0530	External cooling	5.3	28	6	36	66	●
ODP-03E0540	External cooling	5.4	28	6	36	66	●
ODP-03E0550	External cooling	5.5	28	6	36	66	●
ODP-03E0560	External cooling	5.6	28	6	36	66	●
ODP-03E0570	External cooling	5.7	28	6	36	66	●
ODP-03E0580	External cooling	5.8	28	6	36	66	●
ODP-03E0590	External cooling	5.9	28	6	36	66	●
ODP-03E0600	External cooling	6.0	28	6	36	66	●
ODP-03E0610	External cooling	6.1	34	8	36	79	●
ODP-03E0620	External cooling	6.2	34	8	36	79	●
ODP-03E0630	External cooling	6.3	34	8	36	79	●
ODP-03E0640	External cooling	6.4	34	8	36	79	●
ODP-03E0650	External cooling	6.5	34	8	36	79	●
ODP-03E0660	External cooling	6.6	34	8	36	79	●
ODP-03E0670	External cooling	6.7	34	8	36	79	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E0680	External cooling	6.8	34	8	36	79	●
ODP-03E0690	External cooling	6.9	34	8	36	79	●
ODP-03E0700	External cooling	7.0	34	8	36	79	●
ODP-03E0710	External cooling	7.1	41	8	36	79	●
ODP-03E0720	External cooling	7.2	41	8	36	79	●
ODP-03E0730	External cooling	7.3	41	8	36	79	●
ODP-03E0740	External cooling	7.4	41	8	36	79	●
ODP-03E0750	External cooling	7.5	41	8	36	79	●
ODP-03E0760	External cooling	7.6	41	8	36	79	●
ODP-03E0770	External cooling	7.7	41	8	36	79	●
ODP-03E0780	External cooling	7.8	41	8	36	79	●
ODP-03E0790	External cooling	7.9	41	8	36	79	●
ODP-03E0800	External cooling	8.0	41	8	36	79	●
ODP-03E0810	External cooling	8.1	47	10	40	89	●
ODP-03E0820	External cooling	8.2	47	10	40	89	●
ODP-03E0830	External cooling	8.3	47	10	40	89	●
ODP-03E0840	External cooling	8.4	47	10	40	89	●
ODP-03E0850	External cooling	8.5	47	10	40	89	●
ODP-03E0860	External cooling	8.6	47	10	40	89	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E0870	External cooling	8.7	47	10	40	89	●
ODP-03E0880	External cooling	8.8	47	10	40	89	●
ODP-03E0890	External cooling	8.9	47	10	40	89	●
ODP-03E0900	External cooling	9.0	47	10	40	89	●
ODP-03E0910	External cooling	9.1	47	10	40	89	●
ODP-03E0920	External cooling	9.2	47	10	40	89	●
ODP-03E0930	External cooling	9.3	47	10	40	89	●
ODP-03E0940	External cooling	9.4	47	10	40	89	●
ODP-03E0950	External cooling	9.5	47	10	40	89	●
ODP-03E0960	External cooling	9.6	47	10	40	89	●
ODP-03E0970	External cooling	9.7	47	10	40	89	●
ODP-03E0980	External cooling	9.8	47	10	40	89	●
ODP-03E0990	External cooling	9.9	47	10	40	89	●
ODP-03E1000	External cooling	10.0	47	10	40	89	●
ODP-03E1010	External cooling	10.1	55	12	45	102	●
ODP-03E1020	External cooling	10.2	55	12	45	102	●
ODP-03E1030	External cooling	10.3	55	12	45	102	●
ODP-03E1040	External cooling	10.4	55	12	45	102	●
ODP-03E1050	External cooling	10.5	55	12	45	102	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E1060	External cooling	10.6	55	12	45	102	●
ODP-03E1070	External cooling	10.7	55	12	45	102	●
ODP-03E1080	External cooling	10.8	55	12	45	102	●
ODP-03E1090	External cooling	10.9	55	12	45	102	●
ODP-03E1100	External cooling	11.0	55	12	45	102	●
ODP-03E1110	External cooling	11.1	55	12	45	102	●
ODP-03E1120	External cooling	11.2	55	12	45	102	●
ODP-03E1130	External cooling	11.3	55	12	45	102	●
ODP-03E1140	External cooling	11.4	55	12	45	102	●
ODP-03E1150	External cooling	11.5	55	12	45	102	●
ODP-03E1160	External cooling	11.6	55	12	45	102	●
ODP-03E1170	External cooling	11.7	55	12	45	102	●
ODP-03E1180	External cooling	11.8	55	12	45	102	●
ODP-03E1190	External cooling	11.9	55	12	45	102	●
ODP-03E1200	External cooling	12.0	55	12	45	102	●
ODP-03E1210	External cooling	12.1	60	14	45	107	●
ODP-03E1220	External cooling	12.2	60	14	45	107	●
ODP-03E1230	External cooling	12.3	60	14	45	107	●
ODP-03E1240	External cooling	12.4	60	14	45	107	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill

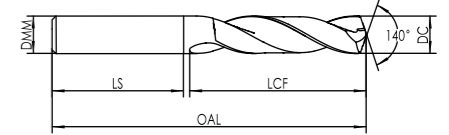

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E1250	External cooling	12.5	60	14	45	107	●
ODP-03E1260	External cooling	12.6	60	14	45	107	●
ODP-03E1270	External cooling	12.7	60	14	45	107	●
ODP-03E1280	External cooling	12.8	60	14	45	107	●
ODP-03E1290	External cooling	12.9	60	14	45	107	●
ODP-03E1300	External cooling	13.0	60	14	45	107	●
ODP-03E1310	External cooling	13.1	60	14	45	107	●
ODP-03E1320	External cooling	13.2	60	14	45	107	●
ODP-03E1330	External cooling	13.3	60	14	45	107	●
ODP-03E1340	External cooling	13.4	60	14	45	107	●
ODP-03E1350	External cooling	13.5	60	14	45	107	●
ODP-03E1360	External cooling	13.6	60	14	45	107	●
ODP-03E1370	External cooling	13.7	60	14	45	107	●
ODP-03E1380	External cooling	13.8	60	14	45	107	●
ODP-03E1390	External cooling	13.9	60	14	45	107	●
ODP-03E1400	External cooling	14.0	60	14	45	107	●
ODP-03E1410	External cooling	14.1	65	16	48	115	●
ODP-03E1420	External cooling	14.2	65	16	48	115	●
ODP-03E1430	External cooling	14.3	65	16	48	115	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E1440	External cooling	14.4	65	16	48	115	●
ODP-03E1450	External cooling	14.5	65	16	48	115	●
ODP-03E1460	External cooling	14.6	65	16	48	115	●
ODP-03E1470	External cooling	14.7	65	16	48	115	●
ODP-03E1480	External cooling	14.8	65	16	48	115	●
ODP-03E1490	External cooling	14.9	65	16	48	115	●
ODP-03E1500	External cooling	15.0	65	16	48	115	●
ODP-03E1510	External cooling	15.1	65	16	48	115	●
ODP-03E1520	External cooling	15.2	65	16	48	115	●
ODP-03E1530	External cooling	15.3	65	16	48	115	●
ODP-03E1540	External cooling	15.4	65	16	48	115	●
ODP-03E1550	External cooling	15.5	65	16	48	115	●
ODP-03E1560	External cooling	15.6	65	16	48	115	●
ODP-03E1570	External cooling	15.7	65	16	48	115	●
ODP-03E1580	External cooling	15.8	65	16	48	115	●
ODP-03E1590	External cooling	15.9	65	16	48	115	●
ODP-03E1600	External cooling	16.0	65	16	48	115	●
ODP-03E1610	External cooling	16.1	73	18	48	123	●
ODP-03E1620	External cooling	16.2	73	18	48	123	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

## High Performance General Machining 3D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E1630	External cooling	16.3	73	18	48	123	●
ODP-03E1640	External cooling	16.4	73	18	48	123	●
ODP-03E1650	External cooling	16.5	73	18	48	123	●
ODP-03E1660	External cooling	16.6	73	18	48	123	●
ODP-03E1670	External cooling	16.7	73	18	48	123	●
ODP-03E1680	External cooling	16.8	73	18	48	123	●
ODP-03E1690	External cooling	16.9	73	18	48	123	●
ODP-03E1700	External cooling	17.0	73	18	48	123	●
ODP-03E1710	External cooling	17.1	73	18	48	123	●
ODP-03E1720	External cooling	17.2	73	18	48	123	●
ODP-03E1730	External cooling	17.3	73	18	48	123	●
ODP-03E1740	External cooling	17.4	73	18	48	123	●
ODP-03E1750	External cooling	17.5	73	18	48	123	●
ODP-03E1760	External cooling	17.6	73	18	48	123	●
ODP-03E1770	External cooling	17.7	73	18	48	123	●
ODP-03E1780	External cooling	17.8	73	18	48	123	●
ODP-03E1790	External cooling	17.9	73	18	48	123	●
ODP-03E1800	External cooling	18.0	73	18	48	123	●
ODP-03E1810	External cooling	18.1	79	20	50	131	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03E

High Performance General Machining 3D External Cooling Twist Drill

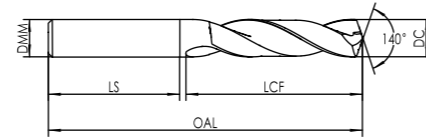

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03E1820	External cooling	18.2	79	20	50	131	●
ODP-03E1830	External cooling	18.3	79	20	50	131	●
ODP-03E1840	External cooling	18.4	79	20	50	131	●
ODP-03E1850	External cooling	18.5	79	20	50	131	●
ODP-03E1860	External cooling	18.6	79	20	50	131	●
ODP-03E1870	External cooling	18.7	79	20	50	131	●
ODP-03E1880	External cooling	18.8	79	20	50	131	●
ODP-03E1890	External cooling	18.9	79	20	50	131	●
ODP-03E1900	External cooling	19.0	79	20	50	131	●
ODP-03E1910	External cooling	19.1	79	20	50	131	●
ODP-03E1920	External cooling	19.2	79	20	50	131	●
ODP-03E1930	External cooling	19.3	79	20	50	131	●
ODP-03E1940	External cooling	19.4	79	20	50	131	●
ODP-03E1950	External cooling	19.5	79	20	50	131	●
ODP-03E1960	External cooling	19.6	79	20	50	131	●
ODP-03E1970	External cooling	19.7	79	20	50	131	●
ODP-03E1980	External cooling	19.8	79	20	50	131	●
ODP-03E1990	External cooling	19.9	79	20	50	131	●
ODP-03E2000	External cooling	20.0	79	20	50	131	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

High Performance General Machining 3D Internal Cooling Twist Drill

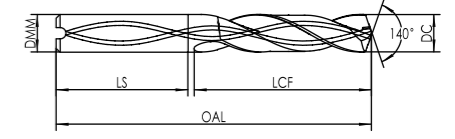

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I0300	Internal cooling	3.0	20	6	36	62	●
ODP-03I0310	Internal cooling	3.1	20	6	36	62	●
ODP-03I0320	Internal cooling	3.2	20	6	36	62	●
ODP-03I0330	Internal cooling	3.3	20	6	36	62	●
ODP-03I0340	Internal cooling	3.4	20	6	36	62	●
ODP-03I0350	Internal cooling	3.5	20	6	36	62	●
ODP-03I0360	Internal cooling	3.6	20	6	36	62	●
ODP-03I0370	Internal cooling	3.7	20	6	36	62	●
ODP-03I0380	Internal cooling	3.8	24	6	36	66	●
ODP-03I0390	Internal cooling	3.9	24	6	36	66	●
ODP-03I0400	Internal cooling	4.0	24	6	36	66	●
ODP-03I0410	Internal cooling	4.1	24	6	36	66	●
ODP-03I0420	Internal cooling	4.2	24	6	36	66	●
ODP-03I0430	Internal cooling	4.3	24	6	36	66	●
ODP-03I0440	Internal cooling	4.4	24	6	36	66	●
ODP-03I0450	Internal cooling	4.5	24	6	36	66	●
ODP-03I0460	Internal cooling	4.6	24	6	36	66	●
ODP-03I0470	Internal cooling	4.7	24	6	36	66	●
ODP-03I0480	Internal cooling	4.8	28	6	36	66	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

## High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I0490	Internal cooling	4.9	28	6	36	66	●
ODP-03I0500	Internal cooling	5.0	28	6	36	66	●
ODP-03I0510	Internal cooling	5.1	28	6	36	66	●
ODP-03I0520	Internal cooling	5.2	28	6	36	66	●
ODP-03I0530	Internal cooling	5.3	28	6	36	66	●
ODP-03I0540	Internal cooling	5.4	28	6	36	66	●
ODP-03I0550	Internal cooling	5.5	28	6	36	66	●
ODP-03I0560	Internal cooling	5.6	28	6	36	66	●
ODP-03I0570	Internal cooling	5.7	28	6	36	66	●
ODP-03I0580	Internal cooling	5.8	28	6	36	66	●
ODP-03I0590	Internal cooling	5.9	28	6	36	66	●
ODP-03I0600	Internal cooling	6.0	28	6	36	66	●
ODP-03I0610	Internal cooling	6.1	34	8	36	79	●
ODP-03I0620	Internal cooling	6.2	34	8	36	79	●
ODP-03I0630	Internal cooling	6.3	34	8	36	79	●
ODP-03I0640	Internal cooling	6.4	34	8	36	79	●
ODP-03I0650	Internal cooling	6.5	34	8	36	79	●
ODP-03I0660	Internal cooling	6.6	34	8	36	79	●
ODP-03I0670	Internal cooling	6.7	34	8	36	79	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

## High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I0680	Internal cooling	6.8	34	8	36	79	●
ODP-03I0690	Internal cooling	6.9	34	8	36	79	●
ODP-03I0700	Internal cooling	7.0	34	8	36	79	●
ODP-03I0710	Internal cooling	7.1	41	8	36	79	●
ODP-03I0720	Internal cooling	7.2	41	8	36	79	●
ODP-03I0730	Internal cooling	7.3	41	8	36	79	●
ODP-03I0740	Internal cooling	7.4	41	8	36	79	●
ODP-03I0750	Internal cooling	7.5	41	8	36	79	●
ODP-03I0760	Internal cooling	7.6	41	8	36	79	●
ODP-03I0770	Internal cooling	7.7	41	8	36	79	●
ODP-03I0780	Internal cooling	7.8	41	8	36	79	●
ODP-03I0790	Internal cooling	7.9	41	8	36	79	●
ODP-03I0800	Internal cooling	8.0	41	8	36	79	●
ODP-03I0810	Internal cooling	8.1	47	10	40	89	●
ODP-03I0820	Internal cooling	8.2	47	10	40	89	●
ODP-03I0830	Internal cooling	8.3	47	10	40	89	●
ODP-03I0840	Internal cooling	8.4	47	10	40	89	●
ODP-03I0850	Internal cooling	8.5	47	10	40	89	●
ODP-03I0860	Internal cooling	8.6	47	10	40	89	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I0870	Internal cooling	8.7	47	10	40	89	●
ODP-03I0880	Internal cooling	8.8	47	10	40	89	●
ODP-03I0890	Internal cooling	8.9	47	10	40	89	●
ODP-03I0900	Internal cooling	9.0	47	10	40	89	●
ODP-03I0910	Internal cooling	9.1	47	10	40	89	●
ODP-03I0920	Internal cooling	9.2	47	10	40	89	●
ODP-03I0930	Internal cooling	9.3	47	10	40	89	●
ODP-03I0940	Internal cooling	9.4	47	10	40	89	●
ODP-03I0950	Internal cooling	9.5	47	10	40	89	●
ODP-03I0960	Internal cooling	9.6	47	10	40	89	●
ODP-03I0970	Internal cooling	9.7	47	10	40	89	●
ODP-03I0980	Internal cooling	9.8	47	10	40	89	●
ODP-03I0990	Internal cooling	9.9	47	10	40	89	●
ODP-03I1000	Internal cooling	10.0	47	10	40	89	●
ODP-03I1010	Internal cooling	10.1	55	12	45	102	●
ODP-03I1020	Internal cooling	10.2	55	12	45	102	●
ODP-03I1030	Internal cooling	10.3	55	12	45	102	●
ODP-03I1040	Internal cooling	10.4	55	12	45	102	●
ODP-03I1050	Internal cooling	10.5	55	12	45	102	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I1060	Internal cooling	10.6	55	12	45	102	●
ODP-03I1070	Internal cooling	10.7	55	12	45	102	●
ODP-03I1080	Internal cooling	10.8	55	12	45	102	●
ODP-03I1090	Internal cooling	10.9	55	12	45	102	●
ODP-03I1100	Internal cooling	11.0	55	12	45	102	●
ODP-03I1110	Internal cooling	11.1	55	12	45	102	●
ODP-03I1120	Internal cooling	11.2	55	12	45	102	●
ODP-03I1130	Internal cooling	11.3	55	12	45	102	●
ODP-03I1140	Internal cooling	11.4	55	12	45	102	●
ODP-03I1150	Internal cooling	11.5	55	12	45	102	●
ODP-03I1160	Internal cooling	11.6	55	12	45	102	●
ODP-03I1170	Internal cooling	11.7	55	12	45	102	●
ODP-03I1180	Internal cooling	11.8	55	12	45	102	●
ODP-03I1190	Internal cooling	11.9	55	12	45	102	●
ODP-03I1200	Internal cooling	12.0	55	12	45	102	●
ODP-03I1210	Internal cooling	12.1	60	14	45	107	●
ODP-03I1220	Internal cooling	12.2	60	14	45	107	●
ODP-03I1230	Internal cooling	12.3	60	14	45	107	●
ODP-03I1240	Internal cooling	12.4	60	14	45	107	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

## High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I1250	Internal cooling	12.5	60	14	45	107	●
ODP-03I1260	Internal cooling	12.6	60	14	45	107	●
ODP-03I1270	Internal cooling	12.7	60	14	45	107	●
ODP-03I1280	Internal cooling	12.8	60	14	45	107	●
ODP-03I1290	Internal cooling	12.9	60	14	45	107	●
ODP-03I1300	Internal cooling	13.0	60	14	45	107	●
ODP-03I1310	Internal cooling	13.1	60	14	45	107	●
ODP-03I1320	Internal cooling	13.2	60	14	45	107	●
ODP-03I1330	Internal cooling	13.3	60	14	45	107	●
ODP-03I1340	Internal cooling	13.4	60	14	45	107	●
ODP-03I1350	Internal cooling	13.5	60	14	45	107	●
ODP-03I1360	Internal cooling	13.6	60	14	45	107	●
ODP-03I1370	Internal cooling	13.7	60	14	45	107	●
ODP-03I1380	Internal cooling	13.8	60	14	45	107	●
ODP-03I1390	Internal cooling	13.9	60	14	45	107	●
ODP-03I1400	Internal cooling	14.0	60	14	45	107	●
ODP-03I1410	Internal cooling	14.1	65	16	48	115	●
ODP-03I1420	Internal cooling	14.2	65	16	48	115	●
ODP-03I1430	Internal cooling	14.3	65	16	48	115	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

## High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I1440	Internal cooling	14.4	65	16	48	115	●
ODP-03I1450	Internal cooling	14.5	65	16	48	115	●
ODP-03I1460	Internal cooling	14.6	65	16	48	115	●
ODP-03I1470	Internal cooling	14.7	65	16	48	115	●
ODP-03I1480	Internal cooling	14.8	65	16	48	115	●
ODP-03I1490	Internal cooling	14.9	65	16	48	115	●
ODP-03I1500	Internal cooling	15.0	65	16	48	115	●
ODP-03I1510	Internal cooling	15.1	65	16	48	115	●
ODP-03I1520	Internal cooling	15.2	65	16	48	115	●
ODP-03I1530	Internal cooling	15.3	65	16	48	115	●
ODP-03I1540	Internal cooling	15.4	65	16	48	115	●
ODP-03I1550	Internal cooling	15.5	65	16	48	115	●
ODP-03I1560	Internal cooling	15.6	65	16	48	115	●
ODP-03I1570	Internal cooling	15.7	65	16	48	115	●
ODP-03I1580	Internal cooling	15.8	65	16	48	115	●
ODP-03I1590	Internal cooling	15.9	65	16	48	115	●
ODP-03I1600	Internal cooling	16.0	65	16	48	115	●
ODP-03I1610	Internal cooling	16.1	73	18	48	123	●
ODP-03I1620	Internal cooling	16.2	73	18	48	123	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

## High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I1630	Internal cooling	16.3	73	18	48	123	●
ODP-03I1640	Internal cooling	16.4	73	18	48	123	●
ODP-03I1650	Internal cooling	16.5	73	18	48	123	●
ODP-03I1660	Internal cooling	16.6	73	18	48	123	●
ODP-03I1670	Internal cooling	16.7	73	18	48	123	●
ODP-03I1680	Internal cooling	16.8	73	18	48	123	●
ODP-03I1690	Internal cooling	16.9	73	18	48	123	●
ODP-03I1700	Internal cooling	17.0	73	18	48	123	●
ODP-03I1710	Internal cooling	17.1	73	18	48	123	●
ODP-03I1720	Internal cooling	17.2	73	18	48	123	●
ODP-03I1730	Internal cooling	17.3	73	18	48	123	●
ODP-03I1740	Internal cooling	17.4	73	18	48	123	●
ODP-03I1750	Internal cooling	17.5	73	18	48	123	●
ODP-03I1760	Internal cooling	17.6	73	18	48	123	●
ODP-03I1770	Internal cooling	17.7	73	18	48	123	●
ODP-03I1780	Internal cooling	17.8	73	18	48	123	●
ODP-03I1790	Internal cooling	17.9	73	18	48	123	●
ODP-03I1800	Internal cooling	18.0	73	18	48	123	●
ODP-03I1810	Internal cooling	18.1	79	20	50	131	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-03I

## High Performance General Machining 3D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-03I1820	Internal cooling	18.2	79	20	50	131	●
ODP-03I1830	Internal cooling	18.3	79	20	50	131	●
ODP-03I1840	Internal cooling	18.4	79	20	50	131	●
ODP-03I1850	Internal cooling	18.5	79	20	50	131	●
ODP-03I1860	Internal cooling	18.6	79	20	50	131	●
ODP-03I1870	Internal cooling	18.7	79	20	50	131	●
ODP-03I1880	Internal cooling	18.8	79	20	50	131	●
ODP-03I1890	Internal cooling	18.9	79	20	50	131	●
ODP-03I1900	Internal cooling	19.0	79	20	50	131	●
ODP-03I1910	Internal cooling	19.1	79	20	50	131	●
ODP-03I1920	Internal cooling	19.2	79	20	50	131	●
ODP-03I1930	Internal cooling	19.3	79	20	50	131	●
ODP-03I1940	Internal cooling	19.4	79	20	50	131	●
ODP-03I1950	Internal cooling	19.5	79	20	50	131	●
ODP-03I1960	Internal cooling	19.6	79	20	50	131	●
ODP-03I1970	Internal cooling	19.7	79	20	50	131	●
ODP-03I1980	Internal cooling	19.8	79	20	50	131	●
ODP-03I1990	Internal cooling	19.9	79	20	50	131	●
ODP-03I2000	Internal cooling	20.0	79	20	50	131	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill

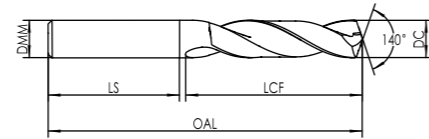

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E0300	External cooling	3.0	28	6	36	66	●
ODP-05E0310	External cooling	3.1	28	6	36	66	●
ODP-05E0320	External cooling	3.2	28	6	36	66	●
ODP-05E0330	External cooling	3.3	28	6	36	66	●
ODP-05E0340	External cooling	3.4	28	6	36	66	●
ODP-05E0350	External cooling	3.5	28	6	36	66	●
ODP-05E0360	External cooling	3.6	28	6	36	66	●
ODP-05E0370	External cooling	3.7	28	6	36	66	●
ODP-05E0380	External cooling	3.8	36	6	36	74	●
ODP-05E0390	External cooling	3.9	36	6	36	74	●
ODP-05E0400	External cooling	4.0	36	6	36	74	●
ODP-05E0410	External cooling	4.1	36	6	36	74	●
ODP-05E0420	External cooling	4.2	36	6	36	74	●
ODP-05E0430	External cooling	4.3	36	6	36	74	●
ODP-05E0440	External cooling	4.4	36	6	36	74	●
ODP-05E0450	External cooling	4.5	36	6	36	74	●
ODP-05E0460	External cooling	4.6	36	6	36	74	●
ODP-05E0470	External cooling	4.7	36	6	36	74	●
ODP-05E0480	External cooling	4.8	44	6	36	82	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill

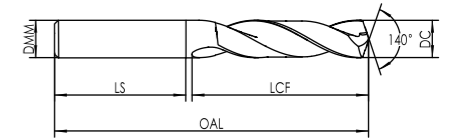

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E0490	External cooling	4.9	44	6	36	82	●
ODP-05E0500	External cooling	5.0	44	6	36	82	●
ODP-05E0510	External cooling	5.1	44	6	36	82	●
ODP-05E0520	External cooling	5.2	44	6	36	82	●
ODP-05E0530	External cooling	5.3	44	6	36	82	●
ODP-05E0540	External cooling	5.4	44	6	36	82	●
ODP-05E0550	External cooling	5.5	44	6	36	82	●
ODP-05E0560	External cooling	5.6	44	6	36	82	●
ODP-05E0570	External cooling	5.7	44	6	36	82	●
ODP-05E0580	External cooling	5.8	44	6	36	82	●
ODP-05E0590	External cooling	5.9	44	6	36	82	●
ODP-05E0600	External cooling	6.0	44	6	36	82	●
ODP-05E0610	External cooling	6.1	53	8	36	91	●
ODP-05E0620	External cooling	6.2	53	8	36	91	●
ODP-05E0630	External cooling	6.3	53	8	36	91	●
ODP-05E0640	External cooling	6.4	53	8	36	91	●
ODP-05E0650	External cooling	6.5	53	8	36	91	●
ODP-05E0660	External cooling	6.6	53	8	36	91	●
ODP-05E0670	External cooling	6.7	53	8	36	91	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E0680	External cooling	6.8	53	8	36	91	●
ODP-05E0690	External cooling	6.9	53	8	36	91	●
ODP-05E0700	External cooling	7.0	53	8	36	91	●
ODP-05E0710	External cooling	7.1	53	8	36	91	●
ODP-05E0720	External cooling	7.2	53	8	36	91	●
ODP-05E0730	External cooling	7.3	53	8	36	91	●
ODP-05E0740	External cooling	7.4	53	8	36	91	●
ODP-05E0750	External cooling	7.5	53	8	36	91	●
ODP-05E0760	External cooling	7.6	53	8	36	91	●
ODP-05E0770	External cooling	7.7	53	8	36	91	●
ODP-05E0780	External cooling	7.8	53	8	36	91	●
ODP-05E0790	External cooling	7.9	53	8	36	91	●
ODP-05E0800	External cooling	8.0	53	8	36	91	●
ODP-05E0810	External cooling	8.1	61	10	40	103	●
ODP-05E0820	External cooling	8.2	61	10	40	103	●
ODP-05E0830	External cooling	8.3	61	10	40	103	●
ODP-05E0840	External cooling	8.4	61	10	40	103	●
ODP-05E0850	External cooling	8.5	61	10	40	103	●
ODP-05E0860	External cooling	8.6	61	10	40	103	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill

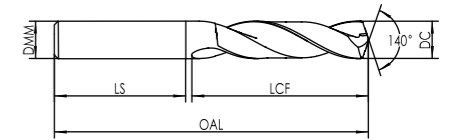

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E0870	External cooling	8.7	61	10	40	103	●
ODP-05E0880	External cooling	8.8	61	10	40	103	●
ODP-05E0890	External cooling	8.9	61	10	40	103	●
ODP-05E0900	External cooling	9.0	61	10	40	103	●
ODP-05E0910	External cooling	9.1	61	10	40	103	●
ODP-05E0920	External cooling	9.2	61	10	40	103	●
ODP-05E0930	External cooling	9.3	61	10	40	103	●
ODP-05E0940	External cooling	9.4	61	10	40	103	●
ODP-05E0950	External cooling	9.5	61	10	40	103	●
ODP-05E0960	External cooling	9.6	61	10	40	103	●
ODP-05E0970	External cooling	9.7	61	10	40	103	●
ODP-05E0980	External cooling	9.8	61	10	40	103	●
ODP-05E0990	External cooling	9.9	61	10	40	103	●
ODP-05E1000	External cooling	10.0	61	10	40	103	●
ODP-05E1010	External cooling	10.1	71	12	45	118	●
ODP-05E1020	External cooling	10.2	71	12	45	118	●
ODP-05E1030	External cooling	10.3	71	12	45	118	●
ODP-05E1040	External cooling	10.4	71	12	45	118	●
ODP-05E1050	External cooling	10.5	71	12	45	118	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill

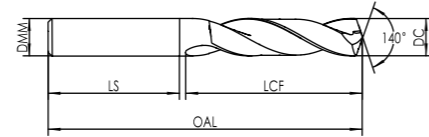

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E1060	External cooling	10.6	71	12	45	118	●
ODP-05E1070	External cooling	10.7	71	12	45	118	●
ODP-05E1080	External cooling	10.8	71	12	45	118	●
ODP-05E1090	External cooling	10.9	71	12	45	118	●
ODP-05E1100	External cooling	11.0	71	12	45	118	●
ODP-05E1110	External cooling	11.1	71	12	45	118	●
ODP-05E1120	External cooling	11.2	71	12	45	118	●
ODP-05E1130	External cooling	11.3	71	12	45	118	●
ODP-05E1140	External cooling	11.4	71	12	45	118	●
ODP-05E1150	External cooling	11.5	71	12	45	118	●
ODP-05E1160	External cooling	11.6	71	12	45	118	●
ODP-05E1170	External cooling	11.7	71	12	45	118	●
ODP-05E1180	External cooling	11.8	71	12	45	118	●
ODP-05E1190	External cooling	11.9	71	12	45	118	●
ODP-05E1200	External cooling	12.0	71	12	45	118	●
ODP-05E1210	External cooling	12.1	77	14	45	124	●
ODP-05E1220	External cooling	12.2	77	14	45	124	●
ODP-05E1230	External cooling	12.3	77	14	45	124	●
ODP-05E1240	External cooling	12.4	77	14	45	124	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E1250	External cooling	12.5	77	14	45	124	●
ODP-05E1260	External cooling	12.6	77	14	45	124	●
ODP-05E1270	External cooling	12.7	77	14	45	124	●
ODP-05E1280	External cooling	12.8	77	14	45	124	●
ODP-05E1290	External cooling	12.9	77	14	45	124	●
ODP-05E1300	External cooling	13.0	77	14	45	124	●
ODP-05E1310	External cooling	13.1	77	14	45	124	●
ODP-05E1320	External cooling	13.2	77	14	45	124	●
ODP-05E1330	External cooling	13.3	77	14	45	124	●
ODP-05E1340	External cooling	13.4	77	14	45	124	●
ODP-05E1350	External cooling	13.5	77	14	45	124	●
ODP-05E1360	External cooling	13.6	77	14	45	124	●
ODP-05E1370	External cooling	13.7	77	14	45	124	●
ODP-05E1380	External cooling	13.8	77	14	45	124	●
ODP-05E1390	External cooling	13.9	77	14	45	124	●
ODP-05E1400	External cooling	14.0	77	14	45	124	●
ODP-05E1410	External cooling	14.1	83	16	48	133	●
ODP-05E1420	External cooling	14.2	83	16	48	133	●
ODP-05E1430	External cooling	14.3	83	16	48	133	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E1440	External cooling	14.4	83	16	48	133	●
ODP-05E1450	External cooling	14.5	83	16	48	133	●
ODP-05E1460	External cooling	14.6	83	16	48	133	●
ODP-05E1470	External cooling	14.7	83	16	48	133	●
ODP-05E1480	External cooling	14.8	83	16	48	133	●
ODP-05E1490	External cooling	14.9	83	16	48	133	●
ODP-05E1500	External cooling	15.0	83	16	48	133	●
ODP-05E1510	External cooling	15.1	83	16	48	133	●
ODP-05E1520	External cooling	15.2	83	16	48	133	●
ODP-05E1530	External cooling	15.3	83	16	48	133	●
ODP-05E1540	External cooling	15.4	83	16	48	133	●
ODP-05E1550	External cooling	15.5	83	16	48	133	●
ODP-05E1560	External cooling	15.6	83	16	48	133	●
ODP-05E1570	External cooling	15.7	83	16	48	133	●
ODP-05E1580	External cooling	15.8	83	16	48	133	●
ODP-05E1590	External cooling	15.9	83	16	48	133	●
ODP-05E1600	External cooling	16.0	83	16	48	133	●
ODP-05E1610	External cooling	16.1	93	18	48	143	●
ODP-05E1620	External cooling	16.2	93	18	48	143	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E1630	External cooling	16.3	93	18	48	143	●
ODP-05E1640	External cooling	16.4	93	18	48	143	●
ODP-05E1650	External cooling	16.5	93	18	48	143	●
ODP-05E1660	External cooling	16.6	93	18	48	143	●
ODP-05E1670	External cooling	16.7	93	18	48	143	●
ODP-05E1680	External cooling	16.8	93	18	48	143	●
ODP-05E1690	External cooling	16.9	93	18	48	143	●
ODP-05E1700	External cooling	17.0	93	18	48	143	●
ODP-05E1710	External cooling	17.1	93	18	48	143	●
ODP-05E1720	External cooling	17.2	93	18	48	143	●
ODP-05E1730	External cooling	17.3	93	18	48	143	●
ODP-05E1740	External cooling	17.4	93	18	48	143	●
ODP-05E1750	External cooling	17.5	93	18	48	143	●
ODP-05E1760	External cooling	17.6	93	18	48	143	●
ODP-05E1770	External cooling	17.7	93	18	48	143	●
ODP-05E1780	External cooling	17.8	93	18	48	143	●
ODP-05E1790	External cooling	17.9	93	18	48	143	●
ODP-05E1800	External cooling	18.0	93	18	48	143	●
ODP-05E1810	External cooling	18.1	101	20	50	153	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel·Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05E

## High Performance General Machining 5D External Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05E1820	External cooling	18.2	101	20	50	153	●
ODP-05E1830	External cooling	18.3	101	20	50	153	●
ODP-05E1840	External cooling	18.4	101	20	50	153	●
ODP-05E1850	External cooling	18.5	101	20	50	153	●
ODP-05E1860	External cooling	18.6	101	20	50	153	●
ODP-05E1870	External cooling	18.7	101	20	50	153	●
ODP-05E1880	External cooling	18.8	101	20	50	153	●
ODP-05E1890	External cooling	18.9	101	20	50	153	●
ODP-05E1900	External cooling	19.0	101	20	50	153	●
ODP-05E1910	External cooling	19.1	101	20	50	153	●
ODP-05E1920	External cooling	19.2	101	20	50	153	●
ODP-05E1930	External cooling	19.3	101	20	50	153	●
ODP-05E1940	External cooling	19.4	101	20	50	153	●
ODP-05E1950	External cooling	19.5	101	20	50	153	●
ODP-05E1960	External cooling	19.6	101	20	50	153	●
ODP-05E1970	External cooling	19.7	101	20	50	153	●
ODP-05E1980	External cooling	19.8	101	20	50	153	●
ODP-05E1990	External cooling	19.9	101	20	50	153	●
ODP-05E2000	External cooling	20.0	101	20	50	153	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I0300	Internal cooling	3.0	28	6	36	66	●
ODP-05I0310	Internal cooling	3.1	28	6	36	66	●
ODP-05I0320	Internal cooling	3.2	28	6	36	66	●
ODP-05I0330	Internal cooling	3.3	28	6	36	66	●
ODP-05I0340	Internal cooling	3.4	28	6	36	66	●
ODP-05I0350	Internal cooling	3.5	28	6	36	66	●
ODP-05I0360	Internal cooling	3.6	28	6	36	66	●
ODP-05I0370	Internal cooling	3.7	28	6	36	66	●
ODP-05I0380	Internal cooling	3.8	36	6	36	74	●
ODP-05I0390	Internal cooling	3.9	36	6	36	74	●
ODP-05I0400	Internal cooling	4.0	36	6	36	74	●
ODP-05I0410	Internal cooling	4.1	36	6	36	74	●
ODP-05I0420	Internal cooling	4.2	36	6	36	74	●
ODP-05I0430	Internal cooling	4.3	36	6	36	74	●
ODP-05I0440	Internal cooling	4.4	36	6	36	74	●
ODP-05I0450	Internal cooling	4.5	36	6	36	74	●
ODP-05I0460	Internal cooling	4.6	36	6	36	74	●
ODP-05I0470	Internal cooling	4.7	36	6	36	74	●
ODP-05I0480	Internal cooling	4.8	44	6	36	82	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill

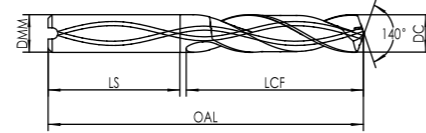

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I0490	Internal cooling	4.9	44	6	36	82	●
ODP-05I0500	Internal cooling	5.0	44	6	36	82	●
ODP-05I0510	Internal cooling	5.1	44	6	36	82	●
ODP-05I0520	Internal cooling	5.2	44	6	36	82	●
ODP-05I0530	Internal cooling	5.3	44	6	36	82	●
ODP-05I0540	Internal cooling	5.4	44	6	36	82	●
ODP-05I0550	Internal cooling	5.5	44	6	36	82	●
ODP-05I0560	Internal cooling	5.6	44	6	36	82	●
ODP-05I0570	Internal cooling	5.7	44	6	36	82	●
ODP-05I0580	Internal cooling	5.8	44	6	36	82	●
ODP-05I0590	Internal cooling	5.9	44	6	36	82	●
ODP-05I0600	Internal cooling	6.0	44	6	36	82	●
ODP-05I0610	Internal cooling	6.1	53	8	36	91	●
ODP-05I0620	Internal cooling	6.2	53	8	36	91	●
ODP-05I0630	Internal cooling	6.3	53	8	36	91	●
ODP-05I0640	Internal cooling	6.4	53	8	36	91	●
ODP-05I0650	Internal cooling	6.5	53	8	36	91	●
ODP-05I0660	Internal cooling	6.6	53	8	36	91	●
ODP-05I0670	Internal cooling	6.7	53	8	36	91	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill

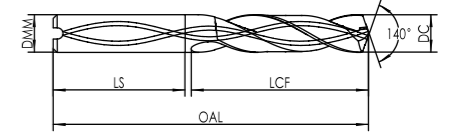

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I0680	Internal cooling	6.8	53	8	36	91	●
ODP-05I0690	Internal cooling	6.9	53	8	36	91	●
ODP-05I0700	Internal cooling	7.0	53	8	36	91	●
ODP-05I0710	Internal cooling	7.1	53	8	36	91	●
ODP-05I0720	Internal cooling	7.2	53	8	36	91	●
ODP-05I0730	Internal cooling	7.3	53	8	36	91	●
ODP-05I0740	Internal cooling	7.4	53	8	36	91	●
ODP-05I0750	Internal cooling	7.5	53	8	36	91	●
ODP-05I0760	Internal cooling	7.6	53	8	36	91	●
ODP-05I0770	Internal cooling	7.7	53	8	36	91	●
ODP-05I0780	Internal cooling	7.8	53	8	36	91	●
ODP-05I0790	Internal cooling	7.9	53	8	36	91	●
ODP-05I0800	Internal cooling	8.0	53	8	36	91	●
ODP-05I0810	Internal cooling	8.1	61	10	40	103	●
ODP-05I0820	Internal cooling	8.2	61	10	40	103	●
ODP-05I0830	Internal cooling	8.3	61	10	40	103	●
ODP-05I0840	Internal cooling	8.4	61	10	40	103	●
ODP-05I0850	Internal cooling	8.5	61	10	40	103	●
ODP-05I0860	Internal cooling	8.6	61	10	40	103	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I0870	Internal cooling	8.7	61	10	40	103	●
ODP-05I0880	Internal cooling	8.8	61	10	40	103	●
ODP-05I0890	Internal cooling	8.9	61	10	40	103	●
ODP-05I0900	Internal cooling	9.0	61	10	40	103	●
ODP-05I0910	Internal cooling	9.1	61	10	40	103	●
ODP-05I0920	Internal cooling	9.2	61	10	40	103	●
ODP-05I0930	Internal cooling	9.3	61	10	40	103	●
ODP-05I0940	Internal cooling	9.4	61	10	40	103	●
ODP-05I0950	Internal cooling	9.5	61	10	40	103	●
ODP-05I0960	Internal cooling	9.6	61	10	40	103	●
ODP-05I0970	Internal cooling	9.7	61	10	40	103	●
ODP-05I0980	Internal cooling	9.8	61	10	40	103	●
ODP-05I0990	Internal cooling	9.9	61	10	40	103	●
ODP-05I1000	Internal cooling	10.0	61	10	40	103	●
ODP-05I1010	Internal cooling	10.1	71	12	45	118	●
ODP-05I1020	Internal cooling	10.2	71	12	45	118	●
ODP-05I1030	Internal cooling	10.3	71	12	45	118	●
ODP-05I1040	Internal cooling	10.4	71	12	45	118	●
ODP-05I1050	Internal cooling	10.5	71	12	45	118	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I1060	Internal cooling	10.6	71	12	45	118	●
ODP-05I1070	Internal cooling	10.7	71	12	45	118	●
ODP-05I1080	Internal cooling	10.8	71	12	45	118	●
ODP-05I1090	Internal cooling	10.9	71	12	45	118	●
ODP-05I1100	Internal cooling	11.0	71	12	45	118	●
ODP-05I1110	Internal cooling	11.1	71	12	45	118	●
ODP-05I1120	Internal cooling	11.2	71	12	45	118	●
ODP-05I1130	Internal cooling	11.3	71	12	45	118	●
ODP-05I1140	Internal cooling	11.4	71	12	45	118	●
ODP-05I1150	Internal cooling	11.5	71	12	45	118	●
ODP-05I1160	Internal cooling	11.6	71	12	45	118	●
ODP-05I1170	Internal cooling	11.7	71	12	45	118	●
ODP-05I1180	Internal cooling	11.8	71	12	45	118	●
ODP-05I1190	Internal cooling	11.9	71	12	45	118	●
ODP-05I1200	Internal cooling	12.0	71	12	45	118	●
ODP-05I1210	Internal cooling	12.1	77	14	45	124	●
ODP-05I1220	Internal cooling	12.2	77	14	45	124	●
ODP-05I1230	Internal cooling	12.3	77	14	45	124	●
ODP-05I1240	Internal cooling	12.4	77	14	45	124	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I1250	Internal cooling	12.5	77	14	45	124	●
ODP-05I1260	Internal cooling	12.6	77	14	45	124	●
ODP-05I1270	Internal cooling	12.7	77	14	45	124	●
ODP-05I1280	Internal cooling	12.8	77	14	45	124	●
ODP-05I1290	Internal cooling	12.9	77	14	45	124	●
ODP-05I1300	Internal cooling	13.0	77	14	45	124	●
ODP-05I1310	Internal cooling	13.1	77	14	45	124	●
ODP-05I1320	Internal cooling	13.2	77	14	45	124	●
ODP-05I1330	Internal cooling	13.3	77	14	45	124	●
ODP-05I1340	Internal cooling	13.4	77	14	45	124	●
ODP-05I1350	Internal cooling	13.5	77	14	45	124	●
ODP-05I1360	Internal cooling	13.6	77	14	45	124	●
ODP-05I1370	Internal cooling	13.7	77	14	45	124	●
ODP-05I1380	Internal cooling	13.8	77	14	45	124	●
ODP-05I1390	Internal cooling	13.9	77	14	45	124	●
ODP-05I1400	Internal cooling	14.0	77	14	45	124	●
ODP-05I1410	Internal cooling	14.1	83	16	48	133	●
ODP-05I1420	Internal cooling	14.2	83	16	48	133	●
ODP-05I1430	Internal cooling	14.3	83	16	48	133	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill



### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I1440	Internal cooling	14.4	83	16	48	133	●
ODP-05I1450	Internal cooling	14.5	83	16	48	133	●
ODP-05I1460	Internal cooling	14.6	83	16	48	133	●
ODP-05I1470	Internal cooling	14.7	83	16	48	133	●
ODP-05I1480	Internal cooling	14.8	83	16	48	133	●
ODP-05I1490	Internal cooling	14.9	83	16	48	133	●
ODP-05I1500	Internal cooling	15.0	83	16	48	133	●
ODP-05I1510	Internal cooling	15.1	83	16	48	133	●
ODP-05I1520	Internal cooling	15.2	83	16	48	133	●
ODP-05I1530	Internal cooling	15.3	83	16	48	133	●
ODP-05I1540	Internal cooling	15.4	83	16	48	133	●
ODP-05I1550	Internal cooling	15.5	83	16	48	133	●
ODP-05I1560	Internal cooling	15.6	83	16	48	133	●
ODP-05I1570	Internal cooling	15.7	83	16	48	133	●
ODP-05I1580	Internal cooling	15.8	83	16	48	133	●
ODP-05I1590	Internal cooling	15.9	83	16	48	133	●
ODP-05I1600	Internal cooling	16.0	83	16	48	133	●
ODP-05I1610	Internal cooling	16.1	93	18	48	143	●
ODP-05I1620	Internal cooling	16.2	93	18	48	143	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●					●				

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill

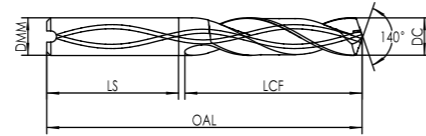

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I1630	Internal cooling	16.3	93	18	48	143	●
ODP-05I1640	Internal cooling	16.4	93	18	48	143	●
ODP-05I1650	Internal cooling	16.5	93	18	48	143	●
ODP-05I1660	Internal cooling	16.6	93	18	48	143	●
ODP-05I1670	Internal cooling	16.7	93	18	48	143	●
ODP-05I1680	Internal cooling	16.8	93	18	48	143	●
ODP-05I1690	Internal cooling	16.9	93	18	48	143	●
ODP-05I1700	Internal cooling	17.0	93	18	48	143	●
ODP-05I1710	Internal cooling	17.1	93	18	48	143	●
ODP-05I1720	Internal cooling	17.2	93	18	48	143	●
ODP-05I1730	Internal cooling	17.3	93	18	48	143	●
ODP-05I1740	Internal cooling	17.4	93	18	48	143	●
ODP-05I1750	Internal cooling	17.5	93	18	48	143	●
ODP-05I1760	Internal cooling	17.6	93	18	48	143	●
ODP-05I1770	Internal cooling	17.7	93	18	48	143	●
ODP-05I1780	Internal cooling	17.8	93	18	48	143	●
ODP-05I1790	Internal cooling	17.9	93	18	48	143	●
ODP-05I1800	Internal cooling	18.0	93	18	48	143	●
ODP-05I1810	Internal cooling	18.1	101	20	50	153	●

● Stock Available ▲ Make-to-order


Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

# ODP-05I

## High Performance General Machining 5D Internal Cooling Twist Drill

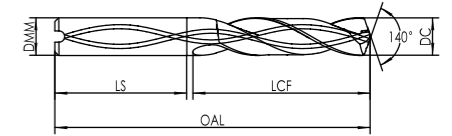

### Diameter Tolerance:

DC tolerance	m7
Shank tolerance	h6

Type	Cooling Type	Basic Dimension (mm)					Stock
		DC	LCf	DMM	LS	OAL	
ODP-05I1820	Internal cooling	18.2	101	20	50	153	●
ODP-05I1830	Internal cooling	18.3	101	20	50	153	●
ODP-05I1840	Internal cooling	18.4	101	20	50	153	●
ODP-05I1850	Internal cooling	18.5	101	20	50	153	●
ODP-05I1860	Internal cooling	18.6	101	20	50	153	●
ODP-05I1870	Internal cooling	18.7	101	20	50	153	●
ODP-05I1880	Internal cooling	18.8	101	20	50	153	●
ODP-05I1890	Internal cooling	18.9	101	20	50	153	●
ODP-05I1900	Internal cooling	19.0	101	20	50	153	●
ODP-05I1910	Internal cooling	19.1	101	20	50	153	●
ODP-05I1920	Internal cooling	19.2	101	20	50	153	●
ODP-05I1930	Internal cooling	19.3	101	20	50	153	●
ODP-05I1940	Internal cooling	19.4	101	20	50	153	●
ODP-05I1950	Internal cooling	19.5	101	20	50	153	●
ODP-05I1960	Internal cooling	19.6	101	20	50	153	●
ODP-05I1970	Internal cooling	19.7	101	20	50	153	●
ODP-05I1980	Internal cooling	19.8	101	20	50	153	●
ODP-05I1990	Internal cooling	19.9	101	20	50	153	●
ODP-05I2000	Internal cooling	20.0	101	20	50	153	●

● Stock Available ▲ Make-to-order

Processed material											
Carbon Steel	Alloy Steel	Pre-hardened steel · Hardened steel				Stainless Steel	Cast piron Nodular cast iron	Copper Alloy	Aluminum Alloy	Titanium Alloy	High Temperature Alloy
		~40	~50	~55	~68						
●	●	●				●					

● Very Suitable ○ Suitable

Hardness unit: HRC

ODP General Drill Parameters Recommendation Table (External cooling)

Workpiece Material	Soft Steel HB ≤ 180		Carbon Steel, Alloy steel ~30HRC		Pre-harden Steel ~40HRC		Cast Iron		Nodular Cast Iron	
	60~120m/min		60~120m/min		40~70m/min		60~120m/min		50~100m/min	
切削速度	60~120m/min		60~120m/min		40~70m/min		60~120m/min		50~100m/min	
Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)
3	9500	0.09~0.12	9500	0.09~0.12	6300	0.09~0.12	9500	0.09~0.12	7400	0.09~0.12
4	7000	0.10~0.15	7000	0.10~0.15	4700	0.10~0.15	7000	0.10~0.15	5600	0.10~0.15
5	5700	0.12~0.18	5700	0.12~0.18	3800	0.12~0.18	5700	0.12~0.18	4500	0.12~0.18
6	4700	0.14~0.20	4700	0.14~0.20	3100	0.14~0.20	4700	0.14~0.20	3700	0.14~0.20
8	3600	0.16~0.24	3600	0.16~0.24	2400	0.16~0.24	3600	0.16~0.24	2800	0.16~0.24
10	2800	0.18~0.27	2800	0.18~0.27	1900	0.18~0.27	2800	0.18~0.27	2200	0.18~0.27
12	2400	0.20~0.30	2400	0.20~0.30	1600	0.20~0.30	2400	0.20~0.30	1900	0.20~0.30
14	2100	0.22~0.35	2100	0.22~0.35	1400	0.22~0.35	2100	0.22~0.35	1600	0.22~0.35
16	1800	0.25~0.36	1800	0.25~0.36	1200	0.25~0.36	1800	0.25~0.36	1400	0.25~0.36
18	1600	0.28~0.38	1600	0.28~0.38	1100	0.28~0.38	1600	0.28~0.38	1200	0.28~0.38
20	1400	0.30~0.40	1400	0.30~0.40	950	0.30~0.40	1400	0.30~0.40	1100	0.30~0.40

- When using this tool for the first time, perform test cutting at 90% of the cutting speed or 85% of the feed rate based on the above data. Once the cutting conditions stabilize, gradually increase the cutting speed and feed rate.
- These standard cutting conditions apply to water-soluble cutting fluids.
- When installing the drill, use a clean, defect-free collet and ensure that the radial runout of the drill is controlled within 0.02 mm.
- These cutting conditions are applicable to hole depths of up to 5D.

ODP General Drill Parameters Recommendation Table (Internal cooling)

Workpiece Material	Soft Steel HB ≤ 180		Carbon Steel, Alloy steel ~30HRC		Pre-harden Steel ~40HRC		Cast Iron		Nodular Cast Iron	
	60~120m/min		60~120m/min		40~70m/min		60~120m/min		50~100m/min	
切削速度	60~120m/min		60~120m/min		40~70m/min		60~120m/min		50~100m/min	
Diameter (mm)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)	Rotating Speed (min <sup>-1</sup> )	Feed Rate (mm/r)
3	12700	0.09~0.12	12700	0.09~0.12	7400	0.09~0.12	12700	0.09~0.12	9500	0.09~0.12
4	9600	0.10~0.15	9600	0.10~0.15	5600	0.10~0.15	9600	0.10~0.15	7000	0.10~0.15
5	7600	0.12~0.18	7600	0.12~0.18	4500	0.12~0.18	7600	0.12~0.18	5700	0.12~0.18
6	6400	0.14~0.20	6400	0.14~0.20	3700	0.14~0.20	6400	0.14~0.20	4700	0.14~0.20
8	4800	0.16~0.24	4800	0.16~0.24	2800	0.16~0.24	4800	0.16~0.24	3600	0.16~0.24
10	3800	0.18~0.27	3800	0.18~0.27	2200	0.18~0.27	3800	0.18~0.27	2800	0.18~0.27
12	3200	0.20~0.30	3200	0.20~0.30	1900	0.20~0.30	3200	0.20~0.30	2400	0.20~0.30
14	2700	0.22~0.35	2700	0.22~0.35	1600	0.22~0.35	2700	0.22~0.35	2100	0.22~0.35
16	2400	0.25~0.36	2400	0.25~0.36	1400	0.25~0.36	2400	0.25~0.36	1800	0.25~0.36
18	2100	0.28~0.38	2100	0.28~0.38	1200	0.28~0.38	2100	0.28~0.38	1600	0.28~0.38
20	1900	0.30~0.40	1900	0.30~0.40	1100	0.30~0.40	1900	0.30~0.40	1400	0.30~0.40

- When using this tool for the first time, perform test cutting at 90% of the cutting speed or 85% of the feed rate based on the above data. Once the cutting conditions stabilize, gradually increase the cutting speed and feed rate.
- These standard cutting conditions apply to water-soluble cutting fluids.
- When installing the drill, use a clean, defect-free collet and ensure that the radial runout of the drill is controlled within 0.02 mm.
- These cutting conditions are applicable to hole depths of up to 5D.



# E

## Technical Information

---

<b>E-1</b>	Turning Tools .....	421-436
<b>E-2</b>	Milling Tools .....	437-442
<b>E-3</b>	Drilling Tools .....	443-450
<b>E-4</b>	Application Cases .....	451-462
<b>E-5</b>	General Technical Guide .....	463-482

# E-1 Technical Information

## Turning Tools

### Recommend Collocation of General Turning Grades and Chip Breakers

	ISO P Steel	ISO M Stainless Steel	ISO K Cast Iron	ISO S Cast Iron
Finishing	OPF — OC2115	OMF — OP1215 — OP1315		SMM — OP1105
	OTF — OC2115	OTF — OP1215 — OP1315		OP6215
		MSF — OP1215 — OP1315	OKM — OC3210	
Semi Finishing	OPM — OC2125	MF — OP1215 — OP1315	OC3215	
	OC2325	OMM — OC4315 — OP1215	General chip breaker — OC3210	
	OC2325S	OP1315	OC3215	OSM — OP1105
	OTM — OC2125	OTM — OP1215 — OP1315		OP6215
Roughing	OC2325		OKR — OC3215	
	OC2325S		OC3220	
	OPR — OC2125		Fit (None chip breaker) — OC3215	
	OC2325S		OC3220	
	OTR — OC2125			
	OC2325			
	OC2325S			

## Recommended Cutting Parameters on Different Grades

ISO	P类 IOS P		
Materials	Carbon steel	Alloy steel	Hardened and tempered steel
Hardness	HB120-180	HB180-240	HB240-350

ISO	IOS M	
Materials	Austenite	Martensite
Hardness	HB120-200	HB330

ISO	IOS K	
Materials	Grey cast Iron	Nodular cast Iron
Hardness	HB150-220	HB140-220

ISO	IOS N
Materials	Aluminium alloy
Hardness	HB60

## Recommended Cutting Parameters on Different Grades

Materials \ Grade		OC2015	OC2025	OC2115	OC2125
Carbon steel	Vc(m/min)	450-200	430-180	480-260	460-240
Alloy steel		320-140	300-130	340-150	330-150
Hardened and tempered steel		200-80	190-70	220-80	210-70

Materials \ Grade		OC4015	OC4025	OC4225	OP1205
Austenite	Vc(m/min)	200-100	190-90	210-110	220-100
Martensite		200-140	210-130	220-140	260-170










Materials \ Grade		OC3015	OC3115D	OC3215	
Grey cast Iron	Vc(m/min)	280-160	400-190	380-200	
Nodular cast Iron		280-140	300-150	220-110	

Grade	OK434			
Vc(m/min)	900-400			

# Common Problems and Solutions for Turning


FAQ		Reason	Solutions		Insert Grade		Cutting Conditions				Tool Shape					Setting/ Machine		
			Harder Grade	Tougher Grade	Vc	Fn	Ap	Coolant	Chip Breaker Review	Rake Angle	Corner Radius	Setting Angle	Edge Strength	Change to Higher Tolerance	Toolholder Rigidity	Workpiece/Tool Installation	Overhang Length	Power, Rigidity
Too Much Wear On Nose	Accuracy Out Tolerance	Wear Increase at Flank Wear	○															
		Unsuitable Cutting Conditions			↓	↑												
Surface Accuracy Deterioration	POOR Roughness Of Surface	Tool weariness Increasing, Cutting Edge not Sharp	○		↓			○		↑	↑	↓	○					
		Cutting Edge Chipping		○		↓	↓		○		↑	↑			○	○	○	
		Unsuitable Geometry							○		↑	↓	○					
		Unsuitable Cutting Conditions			↑	↓	↓	○										
		Vibration, Chattering		○	↑↓	↓	↓	○	○	↑	↓	↑	↓	○	○	○	○	○
Heat	Cutting Heat Factors	Unsuitable Cutting Conditions			↓	↓	↓											
		Unsuitable Geometry	○						○	↑		↓						
Deterioration of Accuracy	Variation of Dimension	Unsuitable Insert Accuracy											○					
		Position Offset of Workpiece and Tool							○	↑	↓	↑		○	○	○	○	
Edge Damage	Wear Increase at Relief Face	Flank Wear	○		↓				○	↑	↑	↓						
		Rake Face Wear	○		↓	↓	↓		○	↑		↓						
	Chipping		○		↓	↓		○			↓	↑	○	○	○	○		
	Built-up Edge	Unsuitable Workpiece Hardness and Cutting Conditions			↑	↑		○	○	↑		↓	○					
	Comp Cracks	Unsuited Tool's Material and Cutting Condition to Workpiece Material			↓	↓	↓	○	○	↑		↓						
	Edge Nose Deformation	Interrupted Cutting	○		↑	↓	↓	○	○	↑	↑	↓	↓					
	Tool Life	Unsuited Material and Cutting Condition	○		↓	↓		○		↑	↓	↑		○	○	○	○	
Chip Control	Long, Tangling Chips	Unsuitable Cutting Conditions			↓	↑	↑											
		Unsuitable Material and Cutting Conditions							○		↓	↑						
	Chips Scattering	Unsuitable Cutting Conditions			↓	↓		○										
Burns Turned-down Edge	Steel, Aluminum-Burr	Unsuitable Cutting Conditions			↑	↓		○										
		Insert Wear, Unsuitable Geometry	○						○	↑	↓	↑	↓					
	Iron Cast, Turned-down Edge	Unsuitable Cutting Conditions			↓	↑		○										
		Insert Wear, Unsuitable Geometry	○						○	○	↓	↓	↓					
Soft Steel, Turned-down Edge	Unsuitable Cutting Conditions			↓	↓													
	Insert Wear, Unsuitable Geometry	○						○	↑	↑		↑	○	○	○	○		

# Tool Wear and Solution

Tool Wear Types	Situation	Reason	Solutions
<b>Flank Wear</b>	Higher cutting resistance Notch wear on flank Poor roughness of surface or deterioration of accuracy. 	Soft grades Excessive cutting speed Small flank angle Low feed	Select a higher wear-resistant grade Reduce cutting speed Increase flank angle Increase feed
<b>Crater Wear</b>	Uncontrolled chip Poor surface quality when finishing High speed processing carbon steel 	Soft grades Excessive cutting speed Excessive feed The strength of chip breaker insufficient	Change to a higher wear-resistant grade Reduce cutting speed Reduce feed Select a higher strength chip breaker
<b>Chipping</b>	Sudden fracture of cutting edge (rake face and flank) Instability insert life 	Toughness insufficient Excessive feed rate Strength of cutting edge insufficient Instability of the tool	Select a tougher grade Decrease feed rate Increase honing of cutting edge (chamfering to rounding) Increase the stability and setting angle
<b>Insert Fracture</b>	Cutting resistance increased Poor surface roughness 	Toughness insufficient Excessive feed rate Strength of cutting edge insufficient Instability of the tool	Select a tougher grade Decrease feed rate Increase honing of cutting edge (chamfering to rounding) Increase the stability and setting angle
<b>Plastic Deformation</b>	Variation of dimension Nose wear, cutting edge drape or passivating when processing alloy steel Poor surface roughness 	Soft grade Excessive cutting speed Excessive cutting depth and feed rate Overheat on cutting edge	Select a higher red hardness cutting material Decrease cutting speed Decrease cutting depth and feed rate Select a higher thermal conductivity cutting material(CVD+sufficient coolant)
<b>Build-Up-Edge</b>	Workpiece dissolve with Cutting edge Poor surface roughness when finishing Cutting resistance increased Cutting soft materials 	Cutting speed too low Cutting edge obtuse Unsuitable tool material	Increase cutting speed Increase rake angle Select small sticking force
<b>Thermal Crack</b>	Crack by heat cycle (often happen in milling and interrupted cutting) 	Toughness of tool grade insufficient Swell and shrink by cutting heat(cold-thermocycling)	Cutting without coolant/Sufficient coolant Select a tougher and more thermal shock resistance grade
<b>Flaking</b>	Often in instability cutting and cutting high-hardness materials 	Build-up edge Uncontrolled chip	Increase rake angle Increase chip breaker
<b>Notch Wear</b>	Notch partial failure Partial cratering 	Processing hardened material, oxide-scale, superalloy	Select a higher wear-resistance CVD grade Adopt taper cutting (variable cutting depth) Decrease setting angle

## The Names of Each Part of Turning Tool

### Names of Turning Holder Parts

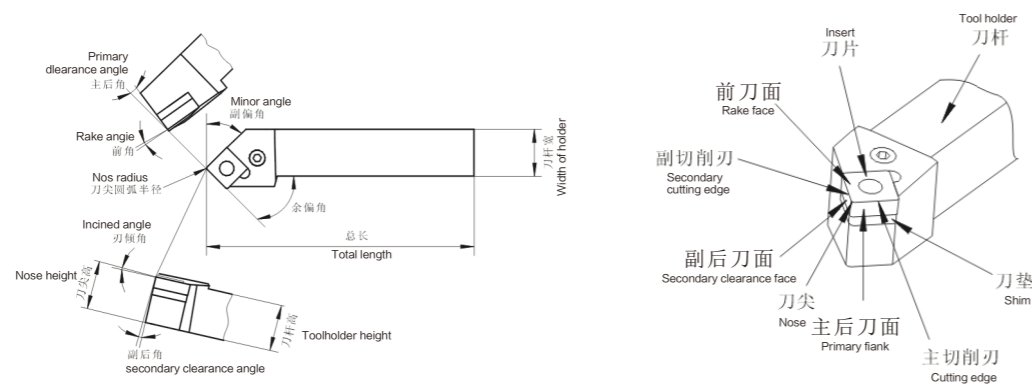

### Effects of Rake Angle

Larger rake angle makes cutting edge sharper, reduces resistant forces of chip flow, diminishes friction and prevent deformation, leading to smaller, less abrasion and higher surface quality. However, too large rake angle would reduce the rigidity and strength of tool. Heat can't be diffused easily, Serious breakage and abrasion on tool would occur, reducing tool life. Please choose rake angle according to machining conditions.

Value selection	Situations
Small rake angle	When machining brittle and hard materials: When roughing and interrupted cutting
Big rake angle	When machining Plastic or soft materials: When finishing:

## The Names of Each Part of Turning Tool

### Effects of Clearance Angle

The main function of clearance angle to reduce the friction between the clearance face of tool and the surface of workpiece. When the rake angle is fixed, larger clearance angle can increase and the achieve higher surface quality. However, if clearance angle is too large, the strength of cutting edge would decrease. Also, heat can't be diffused easily and serious abrious would occur, reducing tool life.

The principle of choosing clearance angle: Choose small clearance angle if friction is not serious

Value selection	Situations
Small clearance angle	In order to increase nose strength when roughing When machining brittle and hard materials
Large clearance angle	In order to reduce friction when finishing When machining materials easy to be hardened:


# The Names of Each Part of Turning Tool

## Effects of Inclined Angle


Positive or negative inclined angle determines the direction of chip flow, and also affects the strength and impact resistance of insert nose.

As diagram(1) shows, when the inclined angle is negative, namely nose is in the lowest point as apposed to eht bottom of tool, chips flow to the machined surface of workpiece.

As diagram(2) shows, when inclined angle is positive, namely the nose is in the highest point as apposed to the bottom of the tool, chips flow to the areas of workpiece surface that haven't been machined.

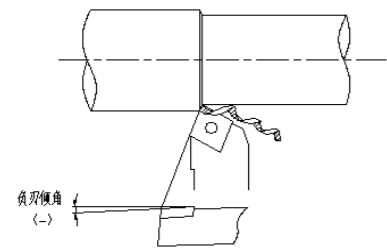

Negative inclined angle



Positive inclined angle

The change of inclined angle also affects insert nose strength and impact resistance. When the inclined angle is negative, the nose is in the lowest point of cutting edge. When the cutting edge enters the workpiece, the contacting point is on the cutting edge or rake face, protecting the nose from impact and increasing the strength of the nose. Normally, negative inclined angle should be chosen for tools with big rake angle. This can not only increase nose strength, but also prevent the impact of entry.


# The Names of Each Part of Turning Tool

## Effects of Approach Angle

Reduces approaching angle increases the strength of tools and enable heat to diffuse easily, improving surface quality. This is because when the approach angle is small, cutting edge width is large, and then the unit width of cutting edge bears less cutting force. Meanwhile, tool life can be improved.

Normally, select 90° approach angle for turning of slender and step shaft; select 45° approach angle for external turning. End surface machining and chamfering. When approach angle is larger, radial force is reduced, cutting is stable, cutting thickness is increased, and chip breaking is excellent.

Value selection	Situations
Small approach	For those materials with high intensity, high hardness and hardened layer on the surface
Big approach angle	When rigidity of the machine is not enough

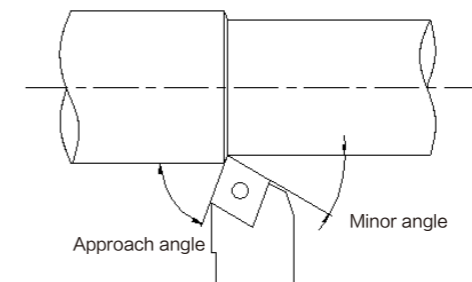

# The Names of Each Part of Turning Tool

## Effects of Minor Angle

Minor angle is the main angle that can affect surface quality, and it can also affect tool strength. If the approach angle is too small, the friction between the secondary flank and machined surface of workpiece will increase, causing vibration.

The principle of selecting minor angle: Select small minor angle when roughing or when the friction is unaffected and is on vibration. Select large minor angle when finishing.

## Nose Radius

Nose radius significantly affects nose strength and surface quality. Large nose radius means higher cutting edge strength, and the abrasion on the rake face and clearance face can be reduced to some extent. However, if the nose radius is too large, radial force will increase, and vibration is easy to occur, affecting machining precision and surface quality.

Value selection	Situations
Small nose radius	Finishing at small cutting depth Machining parts such as slender shaft When the rigidity of the machine is not enough
Large nose radius	When roughing / When machining hard materials (intermittent cutting) When the rigidity of the machine is not enough

# Tool Wear and Solution

## Calculation of Cutting Speed




$$V_c = \frac{\pi \times D \times n}{1000} \text{ (m/min)}$$

In the formula:  $V_c$ : Cutting speed (m/min)  
 $n$ : Rotating speed of main axle (rev/min)  
 $D$ : Diameter of workpiece (mm)  
 For example: When the rotating speed is 280 rev/min and the diameter of workpiece is 150 mm, the cutting speed should be:

$$V_c = \frac{\pi \times D \times n}{1000} = \frac{3.14 \times 150 \times 280}{1000} = 132 \text{ (m/min)}$$

## Calculation of Feed Rate

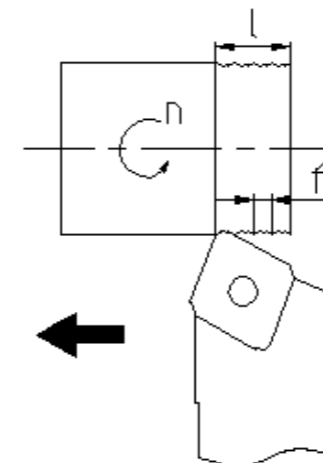

$$f = \frac{L}{n} \text{ (mm/rev)}$$

In the formula:  $f$ : Feed rate per rotation (mm/rev)  
 $L$ : Cutting length per minute (mm/min)  
 $N$ : Rotating speed of main axle (rev/min)  
 For example: When the rotating speed of main axle is 500 rev/min, and the cutting length per minute is 100 mm/min, the feed rate per rotating should be:

$$f = \frac{L}{n} = \frac{100}{500} = 0.2 \text{ (mm/rev)}$$

# Tool Wear and Solution

## Cutting Time Calculation of External and Internal Turning




$$T = \frac{l}{f \times n} \text{ (min)}$$

In the formula: T: Cutting time(min)  
 L: length of machined areas(mm)  
 F: Feed rate(mm/rev)  
 N: Rotating speed of main axle(rev/min)  
 For example: When the rotating speed of main axle is 250rev/min, and the feed rate is 2.0mm/rev,the time needed for a cutting length of 150mm should be:

$$T = \frac{l}{f \times n} = \frac{150}{0.2 \times 250} = 3 \text{ (min)}$$

## Time Calculation End Surface Turning (Constant Linear Speed)

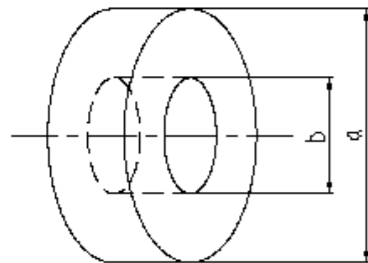


$$T = \frac{\pi \times (a^2 - b^2)}{4000 \times Vc \times f} \text{ (min)}$$

In the formula: T: Cutting time(min)  
 Vc: length of machined areas(mm)  
 F:Cutting speed  
 For end surface without hole, b=0, the formula is still Valid.

# Tool Wear and Solution

## The Oretical Value Calculation of Machined Surface Roughness

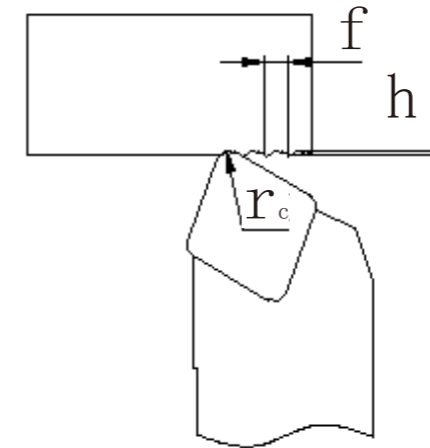

$$R = \frac{f^2}{8r_c} \times 1000 (\mu m)$$


In the formula: R: Theoretical roughness value of machined surface  
 F: Feed rate (mm/rev)  
 Rc: Nose radius(mm)  
 For example: When the feed rate is 0.2mm/rev, and the nose radius is 0.4mm, the theoretical roughness value of machined surface should be:

$$R = \frac{f^2}{8r_c} \times 1000 = \frac{0.2^2}{8 \times 0.4} \times 1000 = 12.5 (\mu m)$$

# Tool Wear and Solution

## Effects of Three Main Parameters

Normally, short machining time, long tool life and high machining precision are expected in machining, so the material quality, hardness, and shape of the workpiece, and properties of machine should be fully considered and then we can select suitable tools and adopt high-efficiency cutting parameters, namely three parameters.

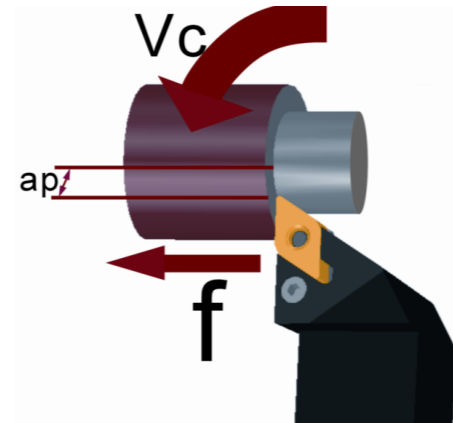

## Cutting Speed (Vc)

When the workpiece is rotating on the machine, the number of its rotation per minute is defined as Rotating speed of main axle (n). Because of its rotation, the cutting speed measured on the contacting point of diameter is defined as linear speed. m/min. Normally, linear speed is considered to measure the effect of cutting speed on machining.

## Effect of Cutting Speed

Cutting speed has significant effect in tool life. When the cutting speed is increased, cutting temperature will increase and tool life will be shortened. Cutting speed varies according to the different types and hardness of work-piece. The below conclusions are reached after many cutting experiments:

- (1) Normally tool life would be reduced to half when the cutting speed is increased by 20%. Tool life would be 20% of the original life if the cutting speed is raised by 50%.
- (2) Low speed (20-40m/min) cutting could easily cause vibration and shorten tool life.

# Tool Wear and Solution

## Feed Rate (fn)

Feed rate is defined as the moving distance of tool after workpiece rotates for one circle, measured by mm/rotation.

## Feed Rate (fn)

Feed rate is a key factor that determines surface quality. Meanwhile it also affects the range of chip forming and the thickness of chips during machining. In terms of the effect on tool life, small feed rate leads to serious abrasion on clearance face, reducing tool life.

## Cutting Depth (ap)

Cutting depth is defined as the difference between machined surface and unmachined surface. Measured by mm. It is half the difference value between the original diameter and machined diameter.

## Effect of Cutting Depth

Cutting depth should be determined by the machining allowance and shape of workpiece, power and rigidity of machine, and tool rigidity. The change of cutting depth has little effect on tool life. If the cutting depth is too low, the cutting nose only scrapes the hardened layer on the workpiece surface, reducing tool life. When there is a hardened oxide layer on the workpiece surface, higher cutting depth should be adopted within the possible range of machine's power to avoid cutting nose just cutting the hardened layer of workpiece.


# E-2

Technical Information

## Milling Tools

# Technical Information About Indexable Milling Tools

## Difference and Selection Between Down Milling and Up Milling

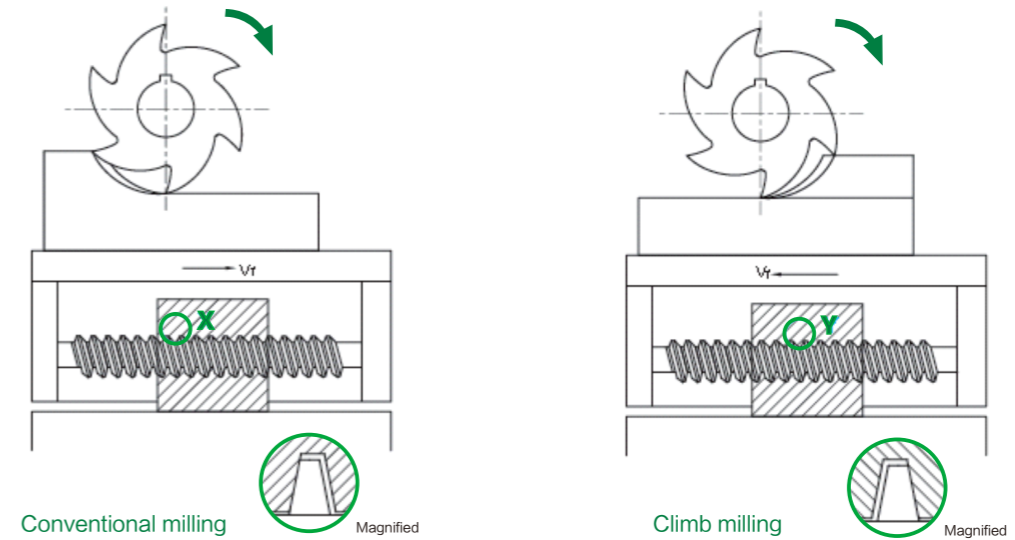

Conventional milling (also called up milling) :the feed direction of workpiece is opposite to that of the milling rotation at the connecting position

Climb milling(also called down milling);the feed direction of workpiece is the same as that of the milling rotation at the connecting position

In down milling,the major force of cutting edge is compressive stress,white in up milling the tensile stress.The compressive strength of cemented carbide material is much larger than its tensile strength.In down milling,as chips become thin from thick gradually,cutting edge and workpiece press against each other.The friction between edge and workpiece is small,thus reducing the abrasion of edge,the hardening of workpiece surface and the surface roughness(Ra).in up milling ,chips become thick from thin gradually.When the insert is cutting into the workpiece,it produces strong friction and more heat than in down milling,and make workpiece surface hardened.




In up milling,because horizontal direction of cutting force milling cutter conducting on workpiece is opposite to the feed direction of workpiece,the lead screw of worktable joints closely with onese side of the screw nut.In down milling,the direction of cutting force is the same as the feed direction.When edge' s radial force on workpiece is large enough,the worktable will bounce left and right,thus make the gap fall behind.The gap will return to the front side with the continuing rotation of lead screw.At this moment the worktable stops motion,however,it will bounce left and right again when the radial cutting force is large enough again.The periodical bounce of worktable will cause poor surface quality of workpiece and tool breakage.

When using end mills for down milling,the edges always starts cutting at the workpiece surface,therefore end mills are not suitable for machining workpiece with hardened surface.

Up milling is recommended for milling thin-wall components or square milling with high requirement for precision.

# Pitch Selection

Pitch is the distance between one point on one cutting edge and the same point on the next edge. Milling cutters are mainly classified into coarse, close and extra close pitches.

Optimized stability		
L	M	H
<p>Coarse pitch      unequal pitch design</p> 	<p>Close pitch</p> 	<p>Extra close pitch</p> 
<p>When the milling width is equal to diameter of cutter, the machining system is stable and main power of machine is sufficient, the use of coarse pitch can achieve high productive efficiency.</p>	<p>Used in general milling and multiple mixed productions.</p>	<p>When the milling width is less than diameter of cutter, cutting by maximum edges can achieve high productive efficiency.</p>

## Selection of Approach Angle

The approach angle is formed by insert and tool body. It affects chip thickness, cutting forces and tool life. Decreasing the approach angle reduces chip thickness and expands the cutting area between cutting edge and workpiece at a given feed rate.

A smaller approach angle also ensures stable entry into or exiting workpiece, protecting the cutting edge and extending tool life. However, this will increase axial cutting forces on the workpiece, thus is not suitable for machining thin workpiece such as thin plate.

Approach angle	Feed rate per tooth	Maximum chip stickiness
90°	$f_z$	$hex = f_z \times \sin \alpha$
75°	$f_z$	$hex = 0.96 \times f_z$
60°	$f_z$	$hex = 0.86 \times f_z$
45°	$f_z$	$hex = 0.707 \times f_z$
圓刀片	$f_z$	$hex = \frac{\sqrt{ic^2 \times (ic-2ap)^2}}{ic} \times f_z$

# The Names of Each Part of Milling Tools

- $V_c$  : cutting speed (m/min)
- $V_f$  : feed rate of worktable (feed speed) (mm/min)
- $D_c$  : nominal diameter of milling tool (mm)
- $f_z$  : feed rate per tooth (mm/z)
- $n$  : spindle speed
- $\pi$  : circumference ratio  $\approx 3.14$
- $Z_n$  : number of teeth
- $T_c$  : machining time (min)
- $Q$  : metal removal rate (cm<sup>3</sup>/min)
- $f_n$  : feed rate per revolution (mm/rev)
- $L$  : Actual working distance (mm)

Cutting speed

$$V_c = \frac{\pi \times D_c \times n}{1000} \text{ (m/min)}$$

Spindle speed

$$n = \frac{1000 \times V_c}{\pi \times D_c} \text{ (rev/min)}$$

Feed rate of worktable (feed speed)

$$V_f = f_z \times n \times Z_n \text{ (mm/min)}$$

Feed rate per tooth

$$f_z = \frac{V_f}{n \times Z_n} \text{ (mm/z)}$$

Feed rate per revolution




$$f_n = \frac{V_f}{n} \text{ (mm/rev)}$$

Machining time


$$T_c = \frac{L}{V_f} \text{ (min)}$$

Metal removal rate

$$Q = \frac{ap \times ae \times V_f}{1000} \text{ (cm}^3\text{/min)}$$

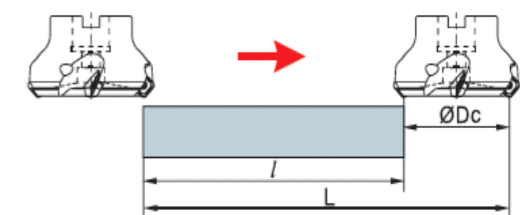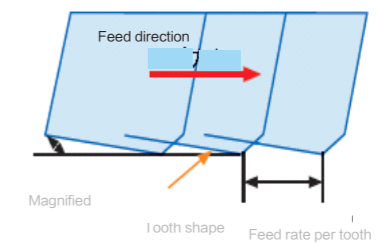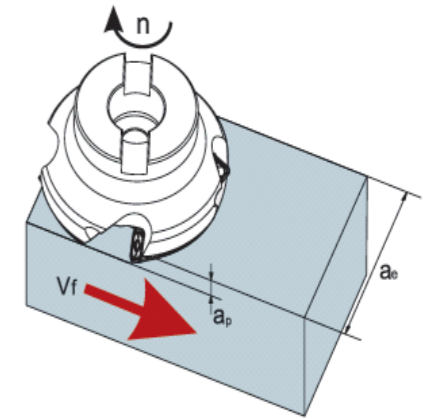

# Function of Each Part in Face Milling

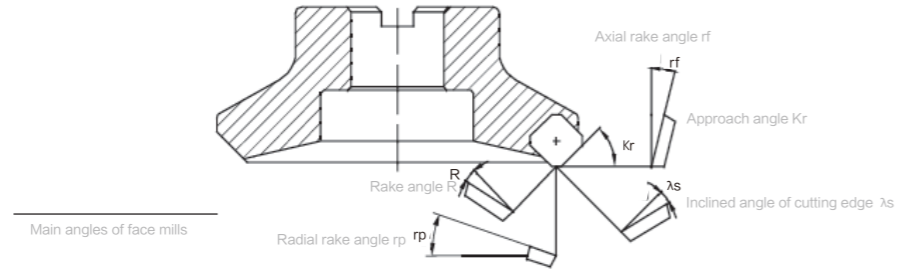

## Main Angles of Face Mill

Designation	Function	Effect		
Axial rake angle $r_f$	Determining the chip direction	Negative, excellent capability of chip removal		
Radial rake angle $r_p$	Determining whether the cutting is easy and fast or not	Positive angle: good cutting performance		
Approach angle $K_r$	Determining the chip thickness	$K_r \uparrow$ , chip thickness $\uparrow$ ; $K_r \downarrow$ chip thickness $\downarrow$		
Rake angle $R$	Determining whether easy and fast the cutting is or not	Poor cutting performance, High-strength cutting edge	$(-) \leftarrow 0 \rightarrow +$	Good cutting performance, Low-strength cutting edge
Inclined angle of cutting edge $\lambda_s$	Determining the chip flow direction	Poor capability of chip removal, High-strength cutting edge	$- \leftarrow 0 \rightarrow +$	Good performance of chip removal, Low-strength cutting edge


## 不同前角的组合特征 Characteristics of Different Rake Angles Combined

		Double positive rake angle	Double negative Rake angle	Positive and negative negative rake angle
Negative rake angle				
0° rake angle				
Positive rake angle				
$r_f$ Axial rake angle $r_f$		+	-	+
$r_p$ Radial rake angle $r_p$		+	-	-
Applicable material machined	P	✓		✓
	M	✓		✓
	K		✓	✓
	N	✓		
	S	✓		✓

# Selection Method of Cutting Tools

主偏角 approach angle	45°	75°	90°
Schematic diagram			
Instruction	Axial force is the largest, it will bend when machining thin-wall workpiece, reducing the precision of workpiece. It can help avoid fringe breakage of workpiece when machining cast iron	The main force is radial cutting force, in is often used in general face milling	he axial is zero in theory, suitable for milling thin plate workpiece

## Selection of Cutting Width and Tool Cutting Diameter in Face Milling

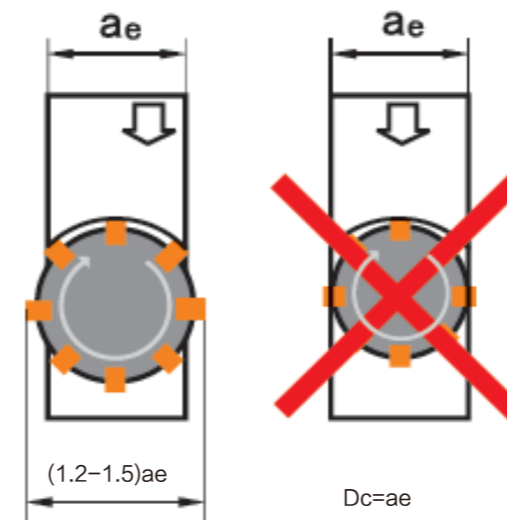

Generally speaking, the relation between cutting width and tool cutting diameter is  $D_c = (1.2-1.5)a_e$  in practical machining, same center line of tool center and work piece center should be avoided.

Tool cutting diameter  
Cutting width

# E-3

Technical Information






## Drilling Tools

## Drilling Application

### initial Drill Penetration

Initial drill penetration is an important factor for successful drilling. one way of ensuring good hole quality is to make sure the penetration surface of the workpiece is vertical to the drill centre axis.

In addition, an indexable drill can carry out initial penetration of convex, concave, inclined and irregular surfaces by adjusting rates.

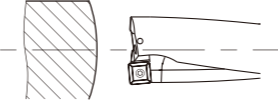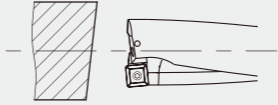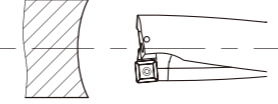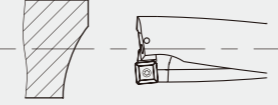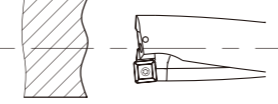workpiece surface	countermeasures
	<p>For a convex surface, the conditions are relatively good and the centre of the drill ideally makes contact with the workpiece first, thus normal feed can be adopted.</p>
	<p>When penetrating an inclined surface, the cutting edges will be unevenly loaded, which may result in the premature drill abrasion. if the angle of the inclined surface is larger than <math>2^\circ</math>, the feed should be reduced to 1/3 of the value recommended for the drill.</p>
	<p>When drilling into non-symmetric curved surface, the drill tends to deviate from the centre because it is penetrating an inclined surface. the feed should be reduced to lower than the value recommended for the initial penetration of concave surface.</p>
	<p>When drilling into irregular surface, the insert faces the risk of chipping, which may also occur when drilling through the workpiece. therefore, the feed rate should be reduced. reduced to lower than the value recommended for the initial penetration of concave surface.</p>
	<p>When drilling into irregular surface, the insert faces the risk of chipping, which may also occur when drilling through the workpiece. therefore, the feed rate should be reduced</p>

## Calculations for Shallow Drilling

### Cutting Speed

$$V_c = \frac{D_c \times \pi \times n}{1000}$$

$V_c$ (m/min):cutting speed  
 $D_c$ (mm):drill diameter  
 $n$ (rev/min):rotating speed

实例:

Spindle speed is 1600rev/min, drill diameter is 20mm, thus cutting speed is:

$$V_c = \frac{D_c \times \pi \times n}{1000} = \frac{20 \times 3.14 \times 1600}{1000} = 100 \text{ (m/min)}$$

### Machining Time

$$T_c = \frac{D_c \times \pi \times n}{1000}$$

$T_c$ (min):machining time  
 $fr$ (mm/rev):feed rate per revolution  
 $i$ :umber of holes  $ld$ (mm):drilling depth  
 $n$ (rev/min):spindle speed

实例:

Drilling a hole with a diameter of 20mm and a depth of 40mm, cutting speed is 100m/min and feed rate per revolution is 0.1mm/rev. Calculate the drilling time.

$$n = \frac{V_c \times 1000}{D_c \times \pi} = \frac{100 \times 1000}{20 \times 3.14} = 1600 \text{ (rev/min)}$$

$$T_c = \frac{ld \times i}{n \times fr} = \frac{40 \times 1}{1600 \times 0.1} = 0.25 \text{ (min)}$$

### Feed Speed

$$V_f = fr \times n \text{ (mm/min)}$$

$V_f$ (mm/min):feed speed  
 $fr$ (mm/rev):feed rate per revolution  
 $n$ (rev/min):spindle speed

实例:

Example:spindle speed is 1500 rev/min, feed rate per revolution is 0.1 mm/rev, thus feed speed is:

$$V_f = fr \times n = 0.1 \times 1500 = 150 \text{ (mm/min)}$$

### Metal Removal Rate

$$Q = \frac{V_f \times \pi \times D_c^2}{4 \times 1000}$$



$Q$ (cm<sup>3</sup>/min):metal removal rate  
 $D_c$ (mm):drill diameter  
 $V_f$ (mm/min):feed speed

实例:



Example:drill diameter is 20mm, feed speed is 160mm/rev, thus metal removal rate is:

$$Q = \frac{V_f \times \pi \times D_c^2}{4 \times 1000} = \frac{160 \times 3.14 \times 20^2}{4 \times 1000} = 50.24 \text{ (cm}^3\text{/min)}$$



## Common Problems and Solutions for Drilling

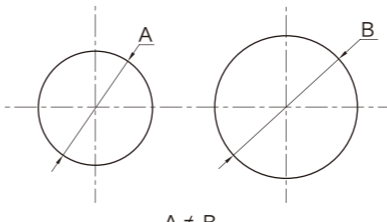Problem	Cause	Solution
Oversize holes 	Poor clamping Large run-out around spindle	Select the holder and chuch with high Precision calibrating spindle Check and adjust after clamping drill
	Non-symmetric point angle Large run-out Chisel edge is off center	Regrind drill Check the precision after clamping drill
Irregular hole size 	Non-symmetric point angle Large run-out Chisel edge is off center Excessive margin abrasion	Select the holder and chuch with high Precision Calibrating spindle Check and adjust after clamping drill
	Poor clamping Large run-out around spindle Workpiece is not firmly held	Select the holder and chuch with high Precision Calibrating spindle Check and adjust after clamping drill
	Feed rate is too high	Reduce the feed speed
	Coolant provide is not enough	Change the coolant supply method, Or increase coolant volume

## Common Problems and Solutions for Drilling

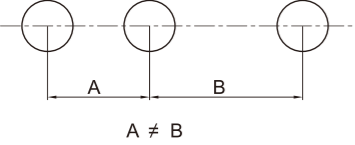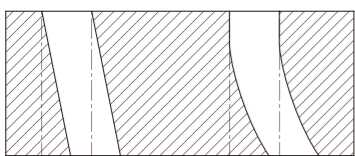Problem	Cause	Solution
<p>Low position accuracy</p> 	Poor re-positioning of spindle Poor clamping Large run-out around spindle	Improve the re-positioning precision of Machine select the holder and chuch With high precision Calibrating spindle Check and adjust after clamping drill
	The feed direction is not Vertical to the workpiece Surface	Adjust the feed direction vertical to The workpiece
	Top center not align with the Spindle center	Check and adjust alignment carefully Before drilling
<p>Bad linearity bad perpendicularity</p> 	Excessive margin abrasion	Regrind
	Poor center hole accuracy	Increase the position accuracy of hole
	Non-symmetric point angle Large run-out Chisel edge is off center	Regrind drill Check the precision after regrinding
	Insufficient drill rigidity	Increase drill rigidity
	Uneven workpiece rigidity Top center not align with the Spindle center (lathe)	The workpiece must be horizontal or Premachined to horizontal before drilling Pre-drill a center hole

## Common Problems and Solutions for Drilling

Problem	Cause	Solution
<p>Poor roundness</p> 	Non-symmetric point angle Large run-out Chisel edge is off center	Regrind drill Check the precision after regrinding
	Poor clamping Large run-out around spindle Workpiece is not firmly held	Select the holder and chuch with high Precision calibrating spindle check run Out and adjust after clamping drill
	Clearance angle is too large	Regrind drill
	Insufficient drill rigidity	Increase drill rigidity
<p>Poor workpiece surface quality</p>	Incorrect regrinding	Regrind calibration
	Insufficient coolant or Unsuitable coolant type	Change the coolant supply method, Or increase coolant volume
	Poor clamping Large run-out around spindle	Select the holder and chuch with high Precision calibrating spindle
	Feed rate is too high	Decrease the feed rate
	Excessive abrasion on Cuttingedge Excessive build-up on margin	Regrind drill Select a coated drill
	Chip jamming	Select a suitable drill(considering flute Geometry, helical angle etc)change the Cutting method (adjust feed rate, use Step feed etc.)
<p>Poor cylindricity</p> 	Non-symmetric point angle Large run-out Chisel edge is off center Excessive margin abrasion	Regrind drill Check the precision after regrinding
	Feed rate is too low	Increase the feed speed

# Shallow Drilling Recommend Cutting Parameter Chart

ISO	Material	HB	mm	mm/r	m/min
P	Carbon steel	80-200	16.0-23.0	0.05-0.09	200(170-240)
			24.0-30.0	0.05-0.09	
			31.0-38.0	0.06-0.10	
			39.0-46.0	0.07-0.11	
Low alloy steel	150-260	16.0-23.0	0.05-0.09	170(140-220)	
		24.0-30.0	0.05-0.12		
		31.0-38.0	0.06-0.14		
		39.0-46.0	0.08-0.16		
High alloy steel	150-320	16.0-23.0	0.05-0.09	150(120-180)	
		24.0-30.0	0.05-0.12		
		31.0-38.0	0.06-0.16		
		39.0-46.0	0.08-0.18		
Cast steel	180-250	16.0-23.0	0.05-0.08	140(120-170)	
		24.0-30.0	0.05-0.08		
		31.0-38.0	0.06-0.10		
		39.0-46.0	0.07-0.11		
M	Stainless steel Ferritic stainless steel Martensitic stainless steel	150-270	16.0-23.0	0.05-0.09	160(110-230)
			24.0-30.0	0.05-0.12	
			31.0-38.0	0.06-0.16	
			39.0-46.0	0.08-0.18	
Austenitic stainless steel	150-275	16.0-23.0	0.05-0.09	140(110-220)	
		24.0-30.0	0.05-0.11		
		31.0-38.0	0.06-0.13		
		39.0-46.0	0.08-0.14		
K	Malleable cast iron	150-230	16.0-23.0	0.05-0.10	160(120-220)
			24.0-30.0	0.05-0.14	
			31.0-38.0	0.08-0.16	
			39.0-46.0	0.10-0.20	
Grey cast iron	150-220	16.0-23.0	0.05-0.10	200(170-240)	
		24.0-30.0	0.05-0.14		
		31.0-38.0	0.08-0.16		
		39.0-46.0	0.10-0.20		
Nodular cast iron	160-250	16.0-23.0	0.05-0.09	160(130-200)	
		24.0-30.0	0.05-0.12		
		31.0-38.0	0.06-0.14		
		39.0-46.0	0.08-0.16		
N	Aluminium alloy	60-110	16.0-23.0	0.05-0.10	300(250-350)
			24.0-30.0	0.05-0.14	
			31.0-38.0	0.08-0.16	
			39.0-46.0	0.10-0.20	
			47.0-58.0	0.12-0.24	
			16.0-23.0	0.05-0.09	
			24.0-30.0	0.05-0.12	
			31.0-38.0	0.06-0.14	
			39.0-46.0	0.08-0.16	
			47.0-58.0	0.10-0.20	
			16.0-23.0	0.05-0.09	
			24.0-30.0	0.05-0.12	
			31.0-38.0	0.06-0.14	
			39.0-46.0	0.08-0.16	
			47.0-58.0	0.10-0.20	
			16.0-23.0	0.05-0.09	
			24.0-30.0	0.05-0.12	
			31.0-38.0	0.06-0.14	
			39.0-46.0	0.08-0.16	
			47.0-58.0	0.10-0.20	

## E-4 Technical Information


### Application Cases

# Stainless Steel Cutting Application Cases



## Stainless steel flange

Customer: XX Company  
 Workpiece: Stainless steel flange(no hole)  
 Workpiece material: 304L  
 Lathe type: CSK50A  
 OKE insert: CNMG120412-MF/OP1215  
 Compare insert: A well-known manufacturer  
 Cooling type: Fluid cooling  
 Processing content: End face rough turning  
 Cutting parameter:  $V_c = 180 \text{ m/min}$ ,  $F_n = 0.28 \text{ mm/r}$ ,  $A_p = 2.2 \text{ mm}$

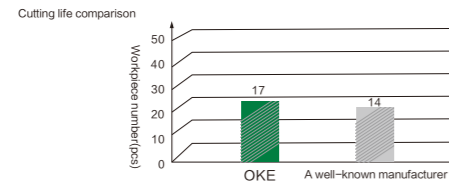


# Stainless Steel Cutting Application Cases




## Stainless steel flange

Customer: XX Company  
 Workpiece: Hubbed flange  
 Workpiece material: SUS304L  
 Lathe type: HTC1635i  
 OKE insert: WNMG060412-OMM/OP1215  
 Compare insert: A well-known manufacturer  
 Cooling type: Fluid cooling  
 Processing content: Taper, end face(semi-finishing)  
 Cutting parameter:  $V_c = 160 \text{ m/min}$ ,  $F_n = 0.18 \text{ mm/r}$ ,  $A_p = 1.5 \text{ mm}$

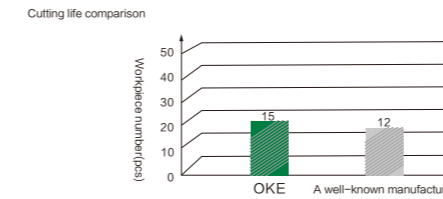


## Stainless steel flange

Customer: XX Company  
 Workpiece: Flange  
 Workpiece material: SUS304  
 Lathe type: HTC1635i  
 OKE insert: WNMG060412-MSF/OP1315  
 Compare insert: A well-known manufacturer  
 Cooling type: Fluid cooling  
 Processing content: End face fine finishing  
 Cutting parameter:  $V_c = 200 \text{ m/min}$ ,  $F_n = 0.28 \text{ mm/r}$ ,  $A_p = 0.6 \text{ mm}$



## Stainless steel flange


Customer: XX Company  
 Workpiece: Flange  
 Workpiece material: 45#Forge piece  
 Lathe type: CNC lathe  
 OKE insert: WNMG080412-OMM/OP1215  
 Compare insert: A well-known manufacturer  
 Cooling type: No  
 Processing content: End face turning  
 Cutting parameter:  $V_c = 258 \text{ m/min}$ ,  $F_n = 0.2 \text{ mm/r}$ ,  $A_p = 1.25 \text{ mm}$



## Stainless Steel Cutting Application Cases



Cutting life comparison




### Stainless steel flange

**Customer:** XX Company  
**Workpiece:** Flange  
**Workpiece material:** SUS316  
**Lathe type:** CNC lathe  
**OKE insert:** WNMG060412-MF/OC4315  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Cooling liquid  
**Processing content:** End face rough turning, remove black skin  
**Cutting parameter:**  $V_c=200$  m/min,  $F_n=0.28-0.33$  mm/r,  $A_p=0.2-0.8$  mm

## Steel Cutting Application Cases




Cutting life comparison




### Steel

**Customer:** XX Company  
**Workpiece:** Hub Bearing Unit(outer ring)  
**Workpiece material:** 55# forge steel  
**Lathe type:** CY-K800H  
**OKE insert:** WNMG080412-OPM/OC2125  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** End face and external rough turning  
**Cutting parameter:**  $V_c=260$  m/min,  $F_n=0.28$  mm/r,  $A_p=1.3$  mm

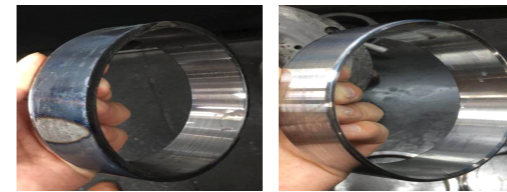


Cutting life comparison



### Steel


**Customer:** XX Company  
**Workpiece:** Bearing outer ring  
**Workpiece material:** Gcr15  
**Lathe type:** SK50P  
**OKE insert:** WNMG080412-Z/OC2325  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Fluid cooling  
**Processing content:** External semi-finishing turning  
**Cutting parameter:**  $V_c=393$  m/min,  $F_n=0.176$  mm/r,  $A_p=1.0$  mm

# Steel Cutting Application Cases

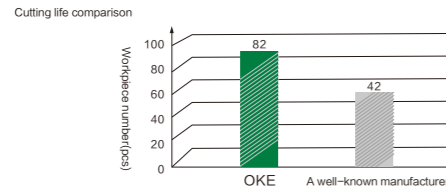


**Steel**  
**Customer:** XX Company  
**Workpiece:** Bearing outer ring  
**Workpiece material:** Gcr15  
**Lathe type:** SK50P  
**OKE insert:** WNMG080408-Z/OC2325  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Fluid cooling  
**Processing content:** External finishing turning  
**Cutting parameter:**  $V_c = 340 \text{ m/min}$ ,  $F_n = 0.18 \text{ mm/r}$ ,  $A_p = 0.5 \text{ mm}$



# Steel Cutting Application Cases

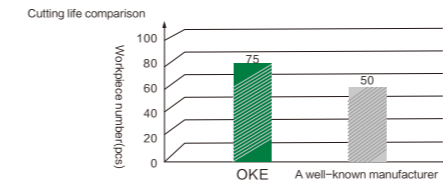

**Steel**  
**Customer:** XX Company  
**Workpiece:** Cross bearing  
**Workpiece material:** 55# forge steel  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** WNMG080408-OPM/OC2125  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Emulsion fluid cooling  
**Processing content:** End face, external  
**Cutting parameter:**  $V_c = 79 \text{ m/min}$ ,  $F_n = 0.4 \text{ mm/r}$ ,  $A_p = 1.25 \text{ mm}$


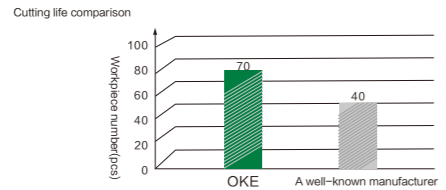


**Steel**  
**Customer:** XX Company  
**Workpiece:** Outer bearing  
**Workpiece material:** 65# forge steel  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** WNMG080412-OPM/OC2125  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** End face, and external  
**Cutting parameter:**  $V_c = 160\text{--}220 \text{ m/min}$ ,  $F_n = 0.2\text{--}0.28 \text{ mm/r}$ ,  $A_p = 1.0 \text{ mm}$

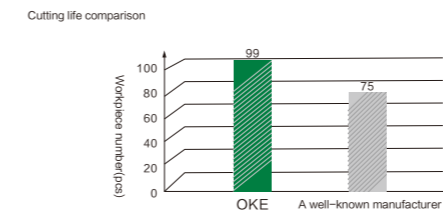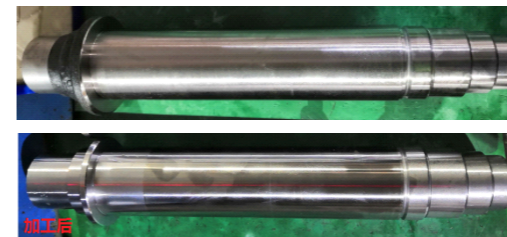


**Steel**  
**Customer:** XX Company  
**Workpiece:** Spindle  
**Workpiece material:** 20CrMoH  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** TNMG160408-OPR/OC2115  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** External roughing turning  
**Cutting parameter:**  $V_c = 138\text{--}218 \text{ m/min}$ ,  $F_n = 0.24\text{--}0.36 \text{ mm/r}$ ,  $A_p = 1 \text{ mm}$

## Steel Cutting Application Cases

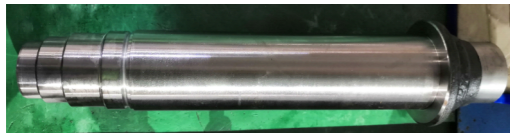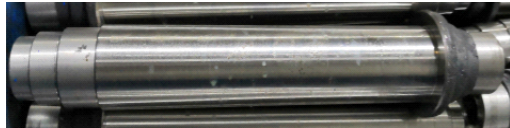

### Steel



**Customer:** XX Company  
**Workpiece:** Spindle  
**Workpiece material:** 20CrMoH  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** VNMG160404-OPF/OC2115  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** External roughing turning  
**Cutting parameter:**  $V_c=132-181$  m/min,  $F_n=0.12-0.24$  mm/r,  $A_p=0.5$  mm

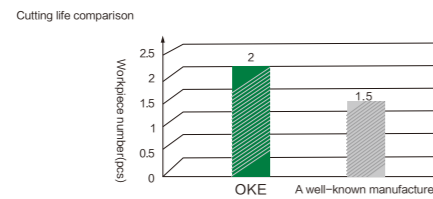

### Steel


**Customer:** XX Company  
**Workpiece:** The outer cylinder  
**Workpiece material:** 30CrMnSi  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** CNMG160608-OPM/OC2125  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** External roughing turning  
**Cutting parameter:**  $V_c=138$  m/min,  $F_n=0.4$  mm/r,  $A_p=3$  mm

## Cast iron Cutting Application Cases

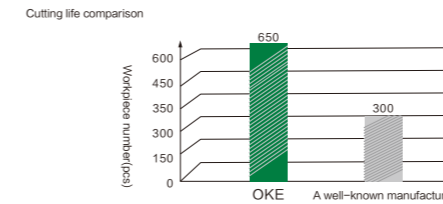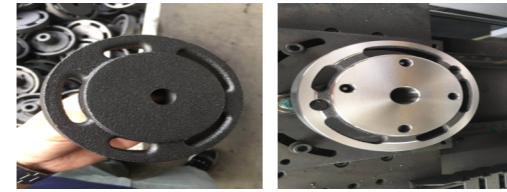

### Cast iron


**Customer:** XX Company  
**Workpiece:** Air Compressor Flange  
**Workpiece material:** HT250  
**Lathe type:** SK50P  
**OKE insert:** WNMG080412/OC3215  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** External and end face roughing turning  
**Cutting parameter:**  $V_c=550$  m/min,  $F_n=0.35$  mm/r,  $A_p=1.2$  mm

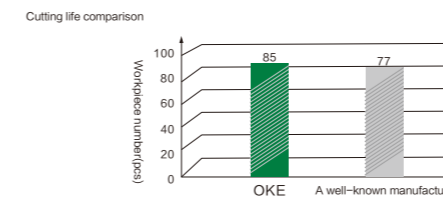

### Cast iron


**Customer:** XX Company  
**Workpiece:** Brake disc  
**Workpiece material:** G3000  
**Lathe type:** i5T3  
**OKE insert:** TNMG220416-GH/OC3215  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** End face semi-finishing turning  
**Cutting parameter:**  $V_c=706$  m/min,  $F_n=0.32$  mm/r,  $A_p=1.0$  mm

# Cast iron Cutting Application Cases

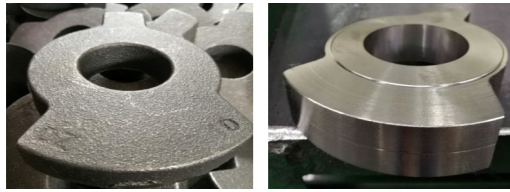


## Cast iron

**Customer:** XX Company  
**Workpiece:** Air compressor flange  
**Workpiece material:** HT250  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** WNMG080412/OC3215  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** External and end face turning  
**Cutting parameter:**  $V_c = 356 \text{ m/min}$ ,  $F_n = 0.28 \text{ mm/r}$ ,  $A_p = 1 \text{ mm}$

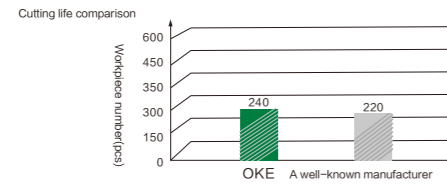

## Cast iron

**Customer:** XX Company  
**Workpiece:** Brake drum  
**Workpiece material:** HT250  
**Lathe type:** Horizontal CNC lathe  
**OKE insert:** WNMG080408/OC3215  
**Compare insert:** A well-known manufacturer  
**Cooling type:** No  
**Processing content:** Endface and external rough turning  
**Cutting parameter:**  $V_c = 230\text{--}290 \text{ m/min}$ ,  $F_n = 0.3\text{--}0.45 \text{ mm/r}$ ,  $A_p = 2\text{--}3 \text{ mm}$

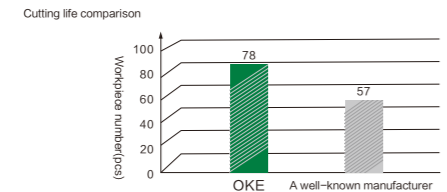


# Milling Application Cases




## Milling

**Customer:** XX Company  
**Workpiece:** Turbine blade  
**Workpiece material:** 22Cr12NiWMoV-5  
**Lathe type:** HSTM-500-HD  
**OKE insert:** APKT170516R-QG/OP1312  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Fluid cooling  
**Processing content:** Profile Milling  
**Cutting parameter:**  $V_c = 241 \text{ m/min}$ ,  $V_f = 3500 \text{ mm/min}$ ,  $A_p = 1.2 \text{ mm}$ ,  $A_e = 16 \text{ mm}$

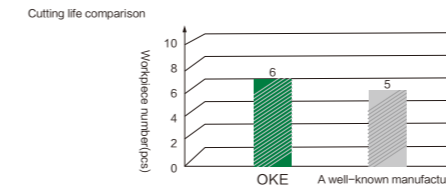


## Milling

**Customer:** XX Company  
**Workpiece:** Gimbal Joint  
**Workpiece material:** 30CrMnSiNi2A  
**Lathe type:** V1850  
**OKE insert:** APMT1135PDER-M2/OP1130  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Fluid cooling  
**Processing content:** Finishing face milling and profile milling  
**Cutting parameter:**  $V_c = 120 \text{ m/min}$ ,  $V_f = 3500 \text{ mm/min}$ ,  $A_p = 0.18 \text{ mm}$ ,  $A_e = 2 \text{ mm}$

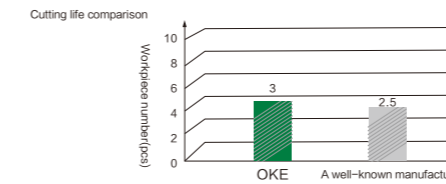


## Milling Application Cases

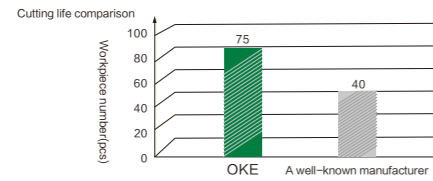

### Milling


**Customer:** XX Company  
**Workpiece:** Side panel mold  
**Workpiece material:** 45#  
**Lathe type:** CNC gantry milling  
**OKE insert:** APMT1604PDER-H2L/OP1215  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Compressed air  
**Processing content:** U-groove, square groove machining, parting  
**Cutting parameter:**  $V_c = 94 \text{ m/min}$ ,  $F_n = 1.04 \text{ mm/r}$ ,  $A_p = 0.3\text{--}0.35 \text{ mm}$

## Threading Application Cases

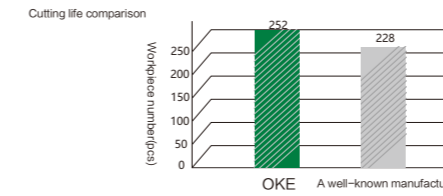


### Thread

**Customer:** XX Company  
**Workpiece:** Joint  
**Processing industry:** Valve  
**Workpiece material:** SUS201  
**Lathe type:** Wenzhou Eastsea CNC  
**OKE insert:** RT1601L-11WA/OP1205  
**Compare insert:** A well-known manufacturer  
**Processing content:** Internal threading turning  
**criterion of changing tool:** Insert wear  
**Cutting fluid:** Yes  
**Cutting parameter:**  $V_c = 75\text{--}83 \text{ m/min}$   $F_n = 2.309 \text{ mm/r}$

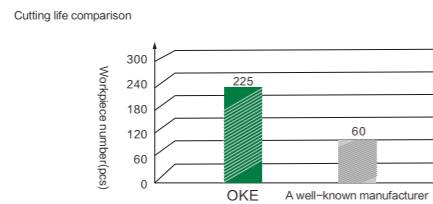

### Milling

**Customer:** XX Company  
**Workpiece:** Side panel mold  
**Workpiece material:** 45#  
**Lathe type:** CNC gantry milling  
**OKE insert:** RPMT1204MO-JSL/OP1315  
**Compare insert:** A well-known manufacturer  
**Cooling type:** Compressed air  
**Processing content:** U-groove, square groove machining, parting  
**Cutting parameter:**  $V_c = 138 \text{ m/min}$ ,  $F_n = 0.96 \text{ mm/r}$ ,  $A_p = 0.45 \text{ mm}$

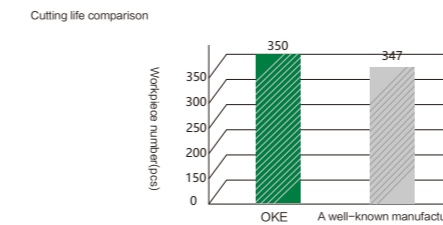

### Thread

**Customer:** XX Company  
**Workpiece:** Elbow  
**Machining Industry:** Valve  
**Workpiece material:** 304  
**Lathe type:** KND  
**OKE insert:** RT1601L-14WA/OP1205  
**Compare insert:** A well-known manufacturer  
**Processing content:** Internal threading turning  
**criterion of changing tool:** Insert wear  
**Cutting fluid:** Yes  
**Cutting parameter:**  $V_c = 58\text{--}65 \text{ m/min}$   $F_n = 1.814 \text{ mm/r}$

# E-5

Technical Information

## General Technical Reference

## Selection Method of Cutting Tool

### Selection Method of General Turning Tools:

- 1.Understand the processed material condition,Machine Model and condition.
- 2.Select the suitable insert shape,setting angle and clamoio designation.
- 3.According to above conditions select details of tools as L/R,demension,etc.
- 4.Select the type,chip break and grade of insert according to all conditions.

### Selection Method of Parting and Grooving tools:

- 1.Understand the processed material condition,Machine Model and condition.
- 2.Select the insert type according to processing methods(external,internal,face grooving)
- 3.According to above conditions select details of tools as L/R, demensions,etc.
- 4.Select the type,clamping designation,chip break and grade of insert according to all conditions

### Selection Method of Threading Tools:

- 1.Understand the processed material condition,Machine Model and condition.
- 2.Select the tool type according to thread's type,processing methods,etc.
- 3.According to above conditions select details of cutting tools as L/R,demension,etc.
- 4.Select the type,chip break and grade of Insert according to all condition

## Selection Method of Cutting Tool

### Selection Method of Milling Tool Specifications:

1. The first step is to understand the material condition, machine type and state you need to process.
2. Determine the basic type of milling tool according to the processing method(plane milling, Square shoulder milling, imitation milling, milling slot, corner milling, etc.).
3. According to the machining precision and the shape and size of the machining surface and other factors to determine the use of the overall milling cutter or transposable milling cutter.
4. According to the above factors and your machine model to determine the interface, dimensions and other details of the tool.
5. Finally determine the blade specification, groove type, and brand number corresponding to the above factors.

### Selection Method for Hole Processing Tool Specifications:

1. Understand the material condition, machine type and state you need to process.
2. Determine the basic types of hole cutting tools(drilling, boring, hinge, thread processing, etc.) according to the processing process.
3. According to the machining accuracy and the dimension of the machining hole, it is determined that the whole tool or the fork-turning tool is used.
4. According to the above factors and your machine model to determine the interface, dimensions and other details of the tool.
5. Finally determine the insert specification, groove type, and brand number corresponding to the above factors.

## The Correction Coefficient Table Of Hardness and Cutting Speed

Material	Theoretical Hardness	The Correction Coefficient Table Of Hardness and Cutting Speed									
		Hardness Decrease ← Hardness Difference(Measured Difference - Theoretical Difference) → Hardness Increase									
		-60	-40	-20	0	20	40	60	80	100	
P	HB180	1.42	1.24	1.11	1.00	0.91	0.84	0.77	0.72	0.67	
M	HB180	1.44	1.25	1.11	1.00	0.91	0.84	0.78	0.73	0.68	
K	Grey Cast Iron	HB220	1.21	1.13	1.06	1.00	0.95	0.9	0.86	0.82	0.79
	Nodular Cast Iron	HB250	1.33	1.21	1.09	1.00	0.91	0.84	0.75	0.7	0.65
N	HB75			1.05	1.00	0.95					
S	HB350			1.12	1.00	0.89					
HRC			-6	-3	0.00	3	6	9			
H	HRC60		1.10	1.02	1.00	0.96	0.93	0.9			

Actual Processing Speed=Recommended Processing Speed\*Correction Factor Of Cutting Speed

### Recommended Cutting Parameters See Packaging

i.e. Cutting general alloy steel, hardness HB180, CNMG120404-OPF/OC2015, the recommended cutting speed is  $V=250\text{m/min}$ . When measured hardness is HB220, the hardness difference is 40(220-180). Find The corresponding speed correction coefficient is 0.84 on above table, and then the actual processing speed  $V_c=250*0.84=210\text{mm/min}$

## The Correction Coefficient Table Of Insert Life and Cutting Speed

Insert Life Insert Material	The Correction Coefficient Table Of Insert Life and Cutting Speed					
	10	15	30	45	60	90
OC2015	1.12	1.00	0.82	0.73	0.67	0.6
OC2025	1.11	1.00	0.84	0.76	0.71	0.64
OC2035	1.11	1.00	0.84	0.76	0.70	0.63
OC2115	1.25	1.00	0.68	0.54	0.46	0.37
OC2125	1.55	1.00	0.47	0.30	0.22	0.14
OP1205	1.15	1.00	0.82	0.74	0.69	0.64
OP1215	1.10	1.00	0.85	0.72	0.65	0.62
OP1030	1.10	1.00	0.85	0.72	0.65	0.62
OC4025	1.19	1.00	0.75	0.63	0.56	0.47
OC4315	1.22	1.00	0.73	0.61	0.54	0.45
OC3105	1.11	1.00	0.70	0.60	0.50	0.40
OC3215	1.22	1.00	0.80	0.65	0.60	0.55
OC3115D	1.25	1.00	0.72	0.63	0.52	0.41
OP2202	1.20	1.00	0.84	0.70	0.63	0.59

Actual Processing Speed=Recommended Processing Speed\*Correction Factor Of Cutting Speed

i.e. Cutting general alloy steel, CNMG120404-OPF/OC2015, the recommended cutting speed is V=250m/min (the standard life is 15 min). If the insert life of 60 mins is expected, find the speed correction coefficient is 0.67 on above table, and then the actual processing speed is Vc=250\*0.67=167.5m/min.

## Comparison Table for Turning Insert Chipbreaker

### Negative Inserts

ISO	Processing Category	OKE	TaeguTec	KENNAMETAL	HITACHI	ZCCCT	SANDVIK	TUNGALOY	KYOCERA	KORLOY	SUMITOMO	mitsubishi
P	Superfinishing	R/L-F	FA	FF	FE		QF,LC	01, F	DP,GP,PP, VF,XP, XP-T,XF	VL	FA,FB, FL	PK,FH,FP, FY,FS
	Finishing	OPF 53 Z	FG,FA	FN	BE, B, CE, BH	DF	XF,PF,	TS,TSF,ZF 11,NS,AS, TQ,NM,CS	DP,GP,PP	VF,VB	SU, LU, FE	LP,C, SA, SH
	Finishing(Soft Steel)	OPF	FC	FN		SF		17,TS,NS,CB 11, 27, ZF	XQ,XS	VL	FL	SY
	Finishing(Wiper)		WS	FW		WGF	WL,WF	AFW,FW, ASW,SW	WF,WP	HW	LUW,SEW	SW
	Semifinishing	OPM KPM	MP,MC, PC,MT	MN	CT,AB, AH,AY,AE	DM,PM	PM,QM, XM	TM,AM,DM, ZM,TA	PG,GS,PS	VM,MP	GU (UG) UX, GE	MP,MA
	Light Roughing	OPR	RT,通槽	RN,RP	RE, Y	DR LR	PR,HM XMR	TH,THS	PH	B25,HR, GR	MU, MX, UX	GH,RP, 通槽
	Roughing	OPR OPH	RX,RH,HD, HT,HY,HZ	MR, RN, RP	TE,UE,HX, HE,H	DR HDR	QR,MR PR,HR	TI,TRS, TUS	PX	GH,VH, VT	HG,HP,HU, HW,HF	HZ, HL,HM, HX,HR,HV

## Comparison Table for Turning Insert Chipbreaker

### Negative Inserts

ISO	Processing Category	OKE	TaeguTec	KENAMETAL	HITACHI	ZCCCT	SANDVIK	TUNGALOY	KYOCERA	KORLOY	SUMITOMO	MITSUBISHI
M	Finishing	OMF MSF	EA,SF	FP,FF	MP,AB,BH	EF	MF	SF,SA,SS	MQ,SQ	VP2,MP	SU,EF	SH,LM
	Semifinishing	OMM MF	ET,EM	MP,UP	PV,DE, SE,AH	EM	MM,QM, XM,K	SM,S,TA	MU,MS, TK,SX	HS,MM	EX,EG,GU	MS,GM, MM,MA,ES
	Roughing	OMR		MR,RP,P	AE	ER	MR	TH,SH,TU		GA,RM	HM,EM,MU	GH, HZ, RM,HL,HZ
K	Finishing	OKM	MT	FN	VA,AH	PM	KF	CF,TA		MP	UZ	LK,MA
	Semifinishing	TK,OKM Without chipbreaker	MG,RT	RP,UN	V,AE	PM	KM	CM	KQ,KG, C,	B25,MK	GZ(UX)	MK,GK,
	Roughing	OPR,平板	KT,RT	平板	RE	平板	KR,KRR	CH,平板	KH,GC,ZS	MA,RK		PK, 平板
S	Finishing	OSF	EA,SF	FS			SF	HRF	MQ	VP2	EF	FJ
	Semifinishing	OSM	ML,MP, SU,MK	NG,UP,MS		VI	NGP,SM	HRM, HMM,SA	SQ,MS, MU,TK	VP3	EG,EX	MS
	Roughing	OSM		RP			SR,SMR		SG,SX	VP4	MU,EM	RS,GJ

## Comparison Table for Turning Insert Chipbreaker

### Positive Inserts

ISO	Processing Category	OKE	TaeguTec	KENAMETAL	HITACHI	ZCCCT	SANDVIK	TUNGALOY	KYOCERA	KORLOY	SUMITOMO	MITSUBISHI
P	Finishing	OTF	FA,SA,FG	LF,FP	JQ	SF,HF	PF,UF,XF	01,PF FS,JS	PF,DP,GP, PP,VF	VL,VF	FC,FB, LU(FP,FK)	FP,FV, LP,SV
	Finishing(Wiper)		WS	FW			WF		WP		LUW,SDW	SW
	Semifinishing	OTM	PC,MT, PMR	MF,MP	JE	HM	XM,PM, UM,PR,XR	PM,PS,PF PSF,PSS 23,24	HQ,GK,	HMP,MP	MU	MV,MP, 全周
	Semifinishing(Wiper)	OTR	WT	MW			WM,PR, UR,KM					MW
M	Finishing	MSF,OTF		FP,FF	MP	EF	MF	SS&	CF,CK,GQ, GF,MQ,SK	VP1	FC	FM,LM
	Semifinishing	OTM		MP,UP		EM	MM	PM	HQ,GK	VL	MU	MM, 通槽
K	Semifinishing	OTM		MW,平板		HR,HM, 平板	KM,KR,KF	CM CM Without chipbreaker	平板	MP	MU	MK,通槽, 平板
S	Finishing			GT-LF,R,GV, GT-HP		NF,NSF	SF,01			VP1		FS,LS, FS-P, LS-P,FJ, LS,MS
	Semifinishing	OSM		MT-LF,R,GV-T, MT-FP			MM,QM, SMR		MQ	VL	SI	
N	General cutting	NL,AK	FL	GT-HP,GT-LF, GW-F,GW-E		LH	AL	PP,AL	AH	AK,AR	AG,AW,AY	AZ

# Material Comparison

## Steel

ISO	Nations And Standard										
	GB (P类)	W-nr	DIN	AISI/SAE	BS	EN	UNI	UNE	SS	AFNOR	JIS
Carbon Steel	15	1.0401	C15	1015	080M15		C15C16	F.111	1350	CC12	
	20	1.0402	C22	1020	050A20	2C	C20C21	F.112	1450	CC20	
	35	1.0501	C35	1035	060A35		C35	F.113	1550	CC35	
	45	1.0503	C45	1045	080M40		C45	F.114	1650	CC45	
	55	1.0535	C55	1055	070M55		C55		1655		
	60	1.0601	C60	1060	080A62	43D	C60			CC55	
	Y15	1.7015	9SMN28	1213	230M07		CF9SMn28	11SMn28	1912	S250	SUM22
Manganese Steel	40Mn	1.1157	40Mn4	1039	150M36	15				35M5	
	25	1.1158	Ck25	1025							S25C
	35Mn2	1.1167	36Mn5	1335				36Mn5	2120	40Mn5	SMn438(H)
	30Mn	1.117	28Mn6	1330	150M28	14A	C28Mn			20M5	SCMn1
	35Mn	1.1183	Cf35	1035	060A35		C36		1572	XS38TS	S35C
	1.0718	9SMnPb28	12L13				CF9MnPb28	11SMnPb28	1914	S250Pb	SUM22L
	1.0722	10SPb20					CF10Pb20	10SPb		10PbF2	
	1.0726	35S20	1140	212M36	8M		F210G	1957	35MF4		
Y13	1.0736	9SMn36	1215	240M07	1B	CF9SMn36	12SMn35			S300	
	1.0737	9SMnPb36	12L14			CF9SMnPb36	12SMnPb35	1926		S300Pb	
55Si2Mn	1.0904	55Si9	9255	250A53	45	55Si8	56Si7	2085	55S7		
	1.0961	60SiCr7	9262			60SiCr8	60SiCr8		60SC7		
15	1.1141	Ck15	1015	080M15	32C	C16	C15K	1370	XC12	S15C	
Ck45	1.1191	45	1045	080M46		C45	C45K	1672	XC42	S45C	
55	1.1203	Ck55	1055	070M55		C50	C55K		XC45	S55C	
50	1.1213	Cf53	1050	060A52		C53		1674	XC48TS	S50C	
60Mn	1.1221	Ck60	1060	080A62	43D	C60		1678	XC60	S68C	
	1.1274	Ck101	1095	060A96				1870		SUP4	
	1.3401	X120Mn12		Z120M12		XG120Mn12	X120Mn12		X120M12	SCMnH/1	
Gr15,45Gr	1.3505	100Cr6	52100	534A99	31	100Cr6	F.131	2258	100C6	SUJ2	
	1.5415	15Mo3	ASTMA204Gr,A	1501-240		16Mo3KW	16Mo3	2912	15D3		
	1.5426	16Mo5	4520	1503-245-420		16Mo5	16Mo5				
	1.5622	14Ni6	ASTMA350LF5			14Ni6	15Ni6		16N6		
	1.5662	X8Ni9	ASTM A353	1501-509:510		X10Ni9	XBNI09				

# Material Comparison

## Steel

ISO	国家和标准 Nations And Standard										
	GB (P类)	W-nr	DIN	AISI/SAE	BS	EN	UNI	UNE	SS	AFNOR	JIS
Nickel Chromium Steel		1.5680	12Ni19	2515						Z18N5	
		1.5710	36NiCr6	3135	640A35	111A				35NC6	SNC236
		1.5732	14NiCr10	3415			16NiCr11	15NiCr11		14NC11	SNC415(H)
		1.5752	14NiCr14	3415, 3310	655M13 655A12	36A				12NC15	SNC815(H)
Nickel Chromium Molybdenum Steel		1.6511	36CrNiMo4	9840	816M40	110	38CrNiMo4(KB)	35CrNiMo4		40NCD3	
		1.6523	21NiCrMo2	8620	850M20	362	20NiCrMo2	20NiCrMo2	2503	20NCD2	SNCM220(H)
		1.6546	40NiCrMo2	8740	311-Type7		40NiCrMo2(KB)	40NiCrMo2			SNC240
	40CrNiMoA	1.6582	34CrNiMo6	4340	817M40	24	35CrNiMo6(KB)		2541	35NCD6	
	1.6587	17CrNiMo6		820A16			14CrNiMo13		18NCD6		
Chromium Steel	15Cr	1.7015	15Cr3	5015	523M15					12C3	SCr415(H)
	35Cr	1.7033	34Cr4	5132	530A32	18B	34Cr4(KB)	35Cr4		32C4	SCr430(H)
	40Cr	1.7035	41Cr4	5140	530M40	18	41Cr4	42Cr4		42C4	SCr440(H)
	40Cr	1.7045	42Cr4	5140				42Cr4	2245		SCr440
Manganese Chromium Steel	18CrMn	1.7131	16MnCr15	5115	527M20		16MnCr15	16MnCr15	2511	16MC5	
	20CrMn	1.7176	55Cr3	5155	527A60	48				55C3	SUP9(A)
	30CrMn	1.7218	25CrMo4	4130	1717CDS110		25CrMo4(KB)	55Cr3	2225	25CD4	SCM420; SCM430
	35CrMo	1.722	34CrMo4	4137, 4135	708A37	19B	35CrMo4	34CrMo4	2234	35CD4	SCM432 SCRMM3
	40CrMoA	1.7223	41CrMo4	4140, 4142	708M40	19A	41CrMo4	41CrMo4	2244	42CD4TS	SCM440
42CrMo, 42CrMnMo	1.7225	42CrMo4	4140	708M40	19A	42CrMo4	42CrMo4	2244	42CD4	SCM440(H)	
Chromium Molybdenum Steel		1.7262	15CrMo5					12CrMo4	2216	12CD4	SCM415(H)
		1.7335	13CrMo44	ASTM A182 F11 F12	1501-620Cr. 27		14CrMo44	14CrMo45		15CD3.5;15CD4.5	
		1.7361	32CrMo12		722M24	40B	32CrMo12	F.124.A	2240	30CD12	
		1.738	10CrMo910	ASTM A182 F22	1501-622Cr.31;45		12CrMo9,10	TU.H	2218	12CD9;10	
		1.7715	14MoV63		1503-660-440			13MoCrV6			
	50CrVA	1.8159	50CrV4	6150	735A50	47	50CrV4	51CrV4	2230	50CV4	SUP10
		1.8509	41CrAlMo7		905M39	41B	41CrAlMo7	41CrAlMo7	2940	40CAD6,12	
	1.8523	39CrMoV139		897M39	40C	36CrMoV12					

# Material Comparison

## Steel

ISO	Nations And Standard											
	GB (P类)	W-nr	DIN	AISI/SAE	BS	EN	UNI	UNE	SS	AFNOR	JIS	
Steel	T10	1.1545	C105W1	W.110			C98KU C100KU	F.515 F.516	1880	Y1105		
	T12A	1.1663	C125W	W.112			C120KU	(C120)		Y2120	SK2	
	CrV,9SiCr	1.2067	100Cr6	L3	BL3			100Cr6		Y100C6		
	Cr12	1.208	X210Cr12	D3	BD3		X210Cr13KU X250Cr12KU	X210Cr12		Z200Cr12	SKD1	
	4Cr5MoVSi	1.2344	X40CrMoV51	H13	BH13			X40CrMoV5	2242	Z40CDV5	SKD61	
	Cr6WV	1.2363	X100CrMoV51	A2	BA2		X35CrMoV05KU X40CrMoV51KU	X100CrMoV5	2260	Z100CDV5	SKD12	
	CrWMo	1.2419	105WCr6				X100CrMoV51KU	105WCr5	2140	105WC13	SKS31 SKS2 SKS3	
	Cr12W	1.2436	X210CrW12				10WCr6 107WCr5KU	X210CrW12	2312		SKD2	
	5CrNiMo	1.2542	45WCrV7	S1	BS1		X215CrW121KU	45WCrS8	2710			
	3Cr2W8V	1.2581	X30WCrV93 X30WCrV93KU	H21	BH21		45WCrV8KU	X30WCrV9		Z30WCV9	SKD5	
	Cr12MoV	1.2601	X165CrMoV12				X28W09KU X30WCrV93KU	X160CrMoV12	2310		SKD11	
	5CrNiMo	1.2731	55NiCrMoV6	L6			X165CrMoV12KU	F.250.S		55NCDV7	SKT4	
	V	1.2833	100V1	W210	BW2					Y1105V	SKS43	
	W6Mo5Cr4V2Co5	1.3243	S6-5-2-5						HS6-5-2-5	2723	Z85WDCV	SKH55
	W18Cr4VCo5	1.3255	S18-1-2-5	T4	BT4		HS6-5-2-5	HS18-1-1-5		Z80WCV 10-05-04-1	SKH3	
	W6Mo5Cr4V2	1.3343	S6-5-2S	M2	BM2		X78WCo1805KU	HS6-5-2	2722	Z85WDCV 06-05-04-02	SKH9	
		1.3348	S2-9-2	M7		Z	X82WMo0605KU	HS-2-9-2	2782	Z100WCWV 09-02-04-02		
	W18Cr4V	1.3355	S18-0-1	T1	BT1		HS2-9-2	HS18-0-1		Z80WCV 18-04-01	SKH2	
	W6Mo5Cr4V3		S6-5-3	M3			X75W18KU				SKH52	
				M42	BM42						SKH59	

# Material Comparison

## Steel

ISO	国家和标准 Nations And Standard					
	GB (P类)	W-nr	DIN	JIS	DAIDO	AISI/SAE
Die Steel					PX5N	P20mod
					NAK55	
					NAK80	
	3Cr13			SUS420J2mod	S-STAR	420mod
				SKS93	YK30	2
	9CrWMn			SKS3mod	GOA	01mod
	Cr12MoV	X165CrMoV12		SKD11	DC11	D2
				SKD11mod	DC53	D2mod
	4Cr5MoSiV1	X40CrMoV51		SKD61	DHA1	H13
					DH21	
				DH31-S		
				DH2F		

# Material Comparison

## Stainless Steel

ISO	国家和标准 Nations And Standard										
	GB (P类)	W-nr	DIN	AISI/SAE	BS	EN	UNI	UNE	SS	AFNOR	JIS
Stainless Steel	0Cr13;1Cr12	1.4000	X6Cr13	403	403S17		X6Cr13	F.3110	2301	Z6C13	SUS403
		1.4001	X7Cr14					F.8401			
	1Cr13	1.4006	X10Cr13	410	410S21	56A	X12Cr13	F.3401	2302	Z10C14	SUS410
	1Cr17	1.4016	X6Cr17	430	430S15	60	X8Cr17	F.3113	220	Z8C17	SUS430
	2Cr13	1.4021	X20Cr13	410	S62	56B; 56C	X20C13	F.3401		Z20C13	SUS410
		1.4027	G-X20Cr14		420C29	56B				Z20C13M	SCS2
	4Cr13	1.4034	X46Cr13		420S45	56D	X40Cr14	F.3405	2304	Z40CM;Z38C13M	SUS420J2
	1Cr17Ni2	1.4057	X20CrNi172	431	431S29	57	X16CrNi16	F.3427	2321	Z15CNi6.02	SUS431
	Y1Cr17	1.4104	X12CrMoS17	430F			X10CrS17	F.3117	2383	Z10CF17	SUS430F
	1Cr17Mo	1.4113	X6CrMo171	434	434S17		x8CrMo17		2325	Z8CD17.01	SUS434
		1.4313	X5CrNi134		425C11					Z4CND13.4M	SCS5
		1.4408	G-X6CrNiMo1810		316C16			F.8414			SCS14
	4Cr9Si2	1.4718	X45CrSi93	HW3	401S45	52	X45CrSi8	F.322		Z45CS9	SUH1
	0Cr13Al	1.4724	X10CrAl13	405	403S17		X10CrAl12	F.311		Z10C13	SUS405
	Cr17	1.4742	X10CrAl18	430	430S15	60	X8Cr17	F.3113		Z10CAS18	SUS430
8Cr20Si2Ni	1.4757	X80CrNiSi20	HNV6	443S65	59	X80CrSiNi20	F.320V		Z80CSN20.02	SUH4	
2Cr25N	1.4762	X10CrAl24	446			X16Cr26		2322	Z10CAS24	SUH446	
Stainless Steel	0Cr18Ni9	1.4301	X5CrNi1810	304	304S15	58E	X5CrNi1810	F.3551 F.354 F.3504	2332	Z6CN18.09	SUS304
	1Cr18Ni9MoZr	1.4305	X10CrNiS189	303	303S21	58M	X10CrNiS18.09	F.3508	2346	Z10CNF18.09	SUS303
	0Cr19Ni10	1.4306	X2CrNi1911	304L	304S12		X2CrNi18.11	F.3503	2352	Z2CN18.10	SCS19
		1.4308	G-X6CrNi189		304C15					Z6CN18.10M	SCS13
	Cr17Ni7	1.4310	X12CrNi177	301			X12CrNi1707	F.3517	2331	Z12CN17.07	SUS301
		1.4311	X2CrNiN1810	304LN	304S62				2371	Z2CN18.10	SUS304LN
	0Cr19Ni9	1.4350	X5CrNi189	304	304S31	58E	X5CrNi1810			Z6CN18.09	SUS304
	0Cr17Ni11Mo2	1.4401	X5CrNiMo1712	316	316S16	Z6CND17.11	X5CrNiMo1712	F.3543	2347	1.4401	SUS316
	00Cr17Ni13Mo2	1.4429	X2CrNiMoN17133	316LN					2375	Z2CND17.13	SUS316LN
	0Cr27Ni12Mo3	1.4435	X2CrNiMo18143	316L	316S12		X2CrNiMo1713		2353	Z2CDN17.13	SCS16
	00Cr19Ni13Mo3	1.4438	X2CrNiMo17133	317L	317S12		X2CrNiMo18.16		2367	Z2CND19.15	SUS317L
		1.4460	X8CrNiMo275	329L					2324		SUS329L; SCH11 SCS11
	1Cr18Ni9Ti	1.4541	X6CrNiTi1810	321	2337	321S12	X6CrNiTi1811	F.3553	58B	Z6CNT18.10	SUS321
	1Cr18Ni11Nb	1.4550	X6CrNiNb1810	347	347S17	58F	X6CrNiTi1811	F.3552	2338	Z6CNNb18.1	SUS347
	Cr18Ni12Mo2Ti	1.4571	X6CrNiMoTi17122	316Ti	320S17	58J	X6CrNiMoTi17	F.3535	2350	Z6NDT17.12	
Stainless Steel		1.4581	G-X5CrNiMoNb1810		318C7		XG8CrNiMo18			Z4CNDNb1812M	SCS22
	Cr17Ni12Mo3Nb	1.4583	X10CrNiMoNb1812	318			X6CrNiMoTiNb17			Z6CNDNb1713B	
	1Cr23Ni13	1.4828	X15CrNiSi2012	309	309S24					Z15CNS20.1	SUH309
	0Cr25Ni20	1.4845	X12CrNi2521	310S	310S24		X6CrNi2520	F.331	2361	Z12CN2520	SUH310
	Cr15Ni36W3Ti	1.4864	X12NiCrSi3616	330						Z12CN35.1	SUH330
		1.4865	G-X40NiCrSi3818		330C11		XG50NiCr3919				SCH15
	5Cr2Mn9Ni4N	1.4871	X53CrMnNiN219	EV8	349S54;321S12	58B	X53CrMnNiN219			Z52CMN21.0	SUH35
1Cr18Ni9Ti	1.4878	X12CrNiTi189	321	321S320	58C	X6CrNiTi1811	F.3523		Z6CNT18.12	Su321	

# Material Comparison

## Cast Iron

ISO	国家和标准 Nations And Standard										
	GB (P类)	W-nr	DIN	AISI/SAE	BS	EN	UNI	UNE	SS	AFNOR	JIS
Nodular Iron	QT400-18		GGG40	60-40-18	400/17		GS370-17	FGE38-17	0717-02	FGS370-17	FCD400
	QT450-10			65-45-12	420/12		GS400-13	FGE42-12		FGS400-12	FCD450
	QT500-7		GGG50	70-50-05	500/7		GS500-7	FGE50-7	0727-02	FGS500-7	FCD500
	QT600-3		GGG60	80-60-03	600/7		GS600-2	FGE60-2	0732-03	FGS600-2	FCD600
	QT700-2		GGG70	100-70-03	700/2		GS700-2	FGE70-2	0737-01	FGS700-2	FCD700
	QT800-2		GGG80	120-90-02	800/2		GS800-2	FGE80-2	0864-03	FGS800-2	FCD800
	QT900-2				900/2						
Grey Cast Iron			GG40	NO.60					0140	FGL400	FC350
	HT350		GG35	NO.50	350	G35	FG35	0135	FGL350	FC300	
	HT300		GG30	NO.45	300	G30	FG30	0130	FGL300	FC250	
	HT250		GG25	NO.35	250	G25	FG25	0125	FGL250	FC200	
	HT200		GG20	NO.30	200	G20	FG20	0120	FGL200	FC150	
	HT150		GG15	NO.20	150	G15	FG15	0115	FGL150	FC100	
	Ht100				100	G10		0110			

# Grade Comparison

	ISO Code	OKE	ZCCCT	MITSUBISHI	Korloy	TaeguTec	SUMITOMO	TUNGALOY	KYOCERA	HITACHI	SANDVIK	KENAMETAL
CVD Turning	P01			UE6105		TT8105	AC8015P AC810P	T9205 T9105	CA510 CA5505	HG8010	GC4305 GC4315	KCP05B KCP05 KCPK05 KCK05B KCK05 KCK15B KCK15
	P10	OC2415	YBC151 YBC152	UE6105 MC6015 UE6110 MY5015	NC3215	TT8105 TT8115	AC8015P AC810P	T9205 T9105 T9215 T9115	CA510 CA515 CA5505 CA5515	HG8010	GC4305 GC4315 GC4325	KCP05B KCP05 KCPK05 KCP10B KCP10 KCP15B KCK15 KCK20B
	P20	OC2125 OC2325S OC2425	YBC251 YBC252	MC6015 UE6110 MC6025 UE6020 MY5015	NC3225 NC3120	TT5100 TT8125	AC8025P AC820P	T9215 T9115 T9225 T9125	CA025P CA525 CA5515 CA5525 CR9025	HG8025 IP2000 GM25	GC4315 GC4325 GC4225 GC1515	KCP10B KCP10 KCP25B KCP25 KCP30B KCP30 KCM15B KCM15
	P30	OC2125 OC2135S OC2425 OC2430	YBC252 YBC351 YBC352	MC6025 UE6020 MC6035 UE6035 UH6400	NC3030	TT8125 T5100	AC8035P AC830P AC6030M AC630M	T9225 T9125 T9235 T9135 T6130	CA025P CA525 CA5525 CA530 CA5535 CR9025	IP3000 GM8035	GC4315 GC4325 GC4335 GC2025	KCP25B KCP25 KCP30B KCP30 KCM15B
	P40	OC2435	YBC351 YBC352	MC6035 UE6035 UH6400	NC5330	TT8135 TT7100	AC8035P AC830P AC6030M AC630M		CA530 CA5535	GM8035 GX30	GC4325 GC4335	KCP30B KCP30 KCP40B KCP40 KCM25B KCM25 KCM35B KCM35
	M10	OC4315		MC7015 US7020	NC9115	TT9215	AC6020M AC610M	T9235 T9135 T6130	CA6515	IP1050S	GC2015 GC1515	KCM15B KCM15
	M20	OC4025 OC4020	YBM151 YBM153	MC7015 US7020 MC7025	NC9115 NC9125	TT9225	AC6020M AC6030M AC610M AC630M	T9215 T9115	CA6525	IP1050S	GC2015 GC2025 GC2020	KCP30B KCP30 KCP40B KCP40 KCM15B KCM15 KCM25B KCM25
	M30	OC4025	YBM151 YBM251	MC7025 US735	NC9125 NC9135	TT9235	AC6030M AC630M AC8035P AC830P	T6120 T9215 T9115		IP100S GX30	GC2025 GC2020	KCP40B KCP40 KCM25B KCM25 KCM35B KCM35
	M40		YB253	US735	NC9135	TT9235	AC6030M AC630M	T6130		IP100S GX30		KCM35B KCM35
	K01	OC3210	YBD052	MC5005 UC5105	NC6310	TT7005	AC4010K AC405K	T5105	CA310 CA4010 CA4505 CA5505	HX3505	GC3210	KCK05B KCK05
	K10	OC3210 OC3215	YBD102	MC5015 UC5115 MY5015	NC6310 NC6315	TT7015	AC4010K AC4015K AC405K AC415K	T5105 T515 T5115 T9215	CA310 CA315 CA4010 CA4115 CA4505 CA4515 CA5505	HX3505 HX3515 HG8010	GC3210	KCK05B KCK05 KCK15B KCK15
	K20	OC3220	YBD152 YBD252	MC5015 UC5115 UE6110 MY5115	NC6315	TT7015 TT7025	AC4015K AC415K AC420K AC425K AC8025P	T515 T5115 T5125 T9215	CA315 CA320 CA4115 CA4120 CA4515	HX3515 HG8010	GC3210 GC3225	KCK15B KCK15 KCK20B KCK20
	K30	OC3220		UE6110				T5125	CA320	HG8010	GC3225	KCP05B KCP05 KCPK05 KCP10B KCP10 KCP25B KCP25 KCK20B KCK20

# Grade Comparison

	ISO Code	OKE	ZCCCT	MITSUBISHI	Korloy	TaeguTec	SUMITOMO	TUNGALOY	KYOCERA	HITACHI	SANDVIK	KENAMETAL
CVD Milling	P10					TT7515	ACP2000 ACP100				GC4220 GC4230 GC3040	KC930M KC935P
	P20		YBC301 YBC251	F7030 MC7020	NC5330	TT7515	ACP2000 ACP100	T3225			GC4220 GC4230 GC3040	SC6525 SP6519
	P30	OC4025	YBM351	F7030 MC7020	NC5330 NC5340 NCM325	TT7800	ACP2000 ACP100	T3130 T3225			GC4230 GC3040 GC2040 M30B	MP91M SC6525 KCPK30 X500
	P40		YBC302		NC5340 NC325 NCM325 NC5350 NCM335	TT7800					GC4240 GC4230 GC3040 GC2040 M30B	KCPK30 X500
	M10						ACM200					
	M20	OC4025	YBM251 YBM253	F7030 MC7020	NC5330		ACM200	T3225	CA6535	GX2160 AX2040	GC2040 GC4230	SC6525
	M30		YBM302	F7030 MC7020	NC5330 NC5340 NCM325 NC5350	TT7800	ACM200	T3225 T3130			GC2040 GC4230 GC4240 M30B S40T	SC6525 X500
	M40				NCM335 NC5350	TT7800					GC2040 M30B S40T GC4240	X500
	K10	OC3210	YBD151	MC5020		TT7515	ACK2000 ACK100 ACK200	T1215 T1115				SC3025 KCK15
	K20	OC3220	YBD252	MC5020	NC5330	TT7515	ACK200 ACK200	T1215	CA420M	GX2120	GC3220 K20W	KCK15 SC3025 MP91M
	K30	OC3220	YBD252		NC5340						GC3040	MP91M KCPK30 SC6525

# Grade Comparison

	ISO Code	OKE	ZCCCT	MITSUBISHI	Korloy	TaeguTec	SUMITOMO	TUNGALOY	KYOCERA	HITACHI	SANDVIK	KENNAMETAL
PVD Turning	P10	OP1215 OP1315	YBG102	VP10MF MS6015	PC8105		AC1030U ACZ150 AC5025S AC520U	AH710	PR930 PR1005 PR1025 PR1115 PR1215 PR1425 PR1225		GC1025 GC1125	KCS10 KCU10 KC5010
	P20	OP1215 OP1315	YBG202	VP10RT VP20RT VP15TF VP20MF	PC8110 PC230	TT9020 TT9030	AC1030U AC5025S AC520U AC530U	AH120 AH725 AH730 SH725 SH730 J740	PR930 PR1025 PR1115 PR1215 PR1225 PR1625	IP2000	GC1025 GC1125	KCS10 KCU10 KCU25 KC5010 KC5025
	P30	OP1320	YBG202	VP10RT VP20RT VP15TF VP20MF	PC5300 PC8115	TT8020 TT8080 TT9030	AC1030U AC530U	AH120 AH725 AH7025 AH730 SH725 SH730 GH730 GH330 J740	PR1025 PR1225 PR1535	IP3000 CY250	GC1025 GC1125	KCU25 KC5025
	P40					TT8020 TT8080 TT9030	AC1030U	AH120 AH725 AH645		IP3000	GC1025	
	M10	OP1215 OP1315 OP1305	YBG202 YBG205	VP10MF MS6015	PC8105 PC8110	TT5080	AC515S AC5025S AC510U AC520U ACZ150	AH8005 AH630	PR1025 PR1215 PR1225	IP050S IP100S JP9105 JP9115	GC1115 GC1125	KCS10 KCU10 KC5010
	M20	OP1215 OP1315	YBG202 YBG205	VP10RT VP20RT VP15TF VP20MF	PC8110 PC8110 PC5300	TT5080 TT9080	AC5015S AC5025S AC1030U AC520U	AH8015 AH630 AH120 AH7025 AH725 SH725 SH730	PR930 PR1025 PR1125 PR1215 PR1425 PR1225 PR1515	IP100S HS9115	GC1115 GC1125 GC2035	KCS10 KCU10 KCU25 KC5010 KC5025
	M30	OP1320		VP10RT VP20RT VP15TF VP20MF MP7035	PC9030 PC5300 PC5400	TT8020 TT8080 TT9020 TT9080	AC5025S AC6040M AC1030U AC520U AC530U	AH645 AH120 AH725 SH725 SH730 J740	PR1125 PR1535		GC1125 GC2035	KCU25 KC5025
	M40			MP7035	PC5400	TT8020 TT8080 TT9020 TT9080	AC6040M AC1030U AC530U	AH645		GX30	GC2035	
	K10						AC1030U AC510U ACZ150	GH110 AH110	PR905 PR1215	HX3305 HG3305 HX3515 HG8010 TH315 ATH10E	GC3330 GC3220 K20W K20D K20M K15W	KCS10 KCU10 KC5010
	K20	OP1215		VP10RT VP20RT VP15TF	PC5300		AC1030U AC510U AC530U ACZ150	AH120 AH7025	PR905 PR1215		GC3330 GC3220 GC3040 K20W K20D GC4230 K20M K15W	KCS10 KCU10 KCU25 KC5010 KC5025
	K30			VP10RT VP20RT VP15TF			AC1030U AC530U	AH120 GH130			GC3330 GC3040 K20W GC4240 GC4230	

# Grade Comparison

	ISO Code	OKE	ZCCCT	MITSUBISHI	Korloy	TaeguTec	SUMITOMO	TUNGALOY	KYOCERA	HITACHI	SANDVIK	KENNAMETAL
PVD Turning	P10		YBG252		PC2005 PC2010 PC2015	TT2510 TT7080	ACP2500 ACP200	AH120 AH725	PR830 PR1025 PR1225	PCA12M PN15M PN215 JP4115	GC1010 GC1025 GC1030	KC5010M KC515M
	P20	OP1215 OP1315 OP2202	YBG202 YBG205 YBG9320 YBG252	MP6120 VP15TF	PC2505 PC2510	TT2510 TT7080 TT8020 TT9030 TT9080	ACP3000 ACU2500 ACP200 ACP300	AH120 AH725 AH3135 AH9030 AH3225 AH9130	PR1525 PR830 PR1025 PR1225 PR1230	CY150 CY9020 JP4120	GC1025 GC1030 GC2030	KC522M KC525M KCSM30 SP6519
	P30	OP1030 OP1215 OP1315 OP1325	YBG302	MP6120 VP15TF MP6130 VP30RT	PC3600 PC3500 PC210F PC5300	TT8020 TT8080 TT9030 TT9080	ACP3000 ACU2500 ACP200 ACP300	AH120 AH725 AH3135 AH130 AH3225 AH9130	PR1230 PR1535	HC844 CY25 CY250 CY259V JS4045	GC1030 GC1010 GC2030	KC525M KC530 KC725M KC735M KCPM40 KCSM30 X400
	P40	OP1340	YBG302	VP30RT	PC5400	TT8020 TT8080 TT9030 TT9080	ACP3000 ACU2500 ACP300	AH140		PTH30E PTH40H JS4060 GX2140	GC1030 GC2030	KC725M KC735M KCPM40
	M10		YBG252		PC210F		ACU2500 ACM100 ACK300 ACP300	AH725	PR1025 PR1225	PN15M PN215	GC1010 GC1030	KC515M SP4019 SP6519
	M20	OP1212 OP1315 OP2202	YBG202 YBG205 YBG9320 YBG252	VP15TF MP7130 MP7030 VP20RT	PC5300	TT9030 TT9080	ACU2500 ACK300 ACP300	AH725 AH3135 AH130 AH6030 AH3225 AH9130	PR1525 PR1025 PR1225	JP4120	GC1030 GC1040 GC2030 S30T	KC522M KC525M SP4019 SP6519 X700
	M30	OP1325	YBG302	VP15TF MP7130 MP7030 VP20RT MP7140	PC9530 PC5400	TT8020 TT8080 TT9030 TT9080	ACM300	AH3135 AH130 AH9130	PR1535	HC844 CY250 JS4045	GC1040 S30T GC2030	KC522M KC525M KC725M KC735M KCPM40 KCSM30 KCSM40 SC6525 X700
	M40		YBG302	MP7140 VP30RT	PC5400	TT8020 TT8080 TT9030 TT9080	ACM300	AH140		PTH30E PTH40H JM4160 GX2160 AX2040		KC725M KCPM40 KCSM40
	K10		YBG102 YBG252	MP8010	PC8110 PC6510	TT6080	ACK3000 ACU2500	AH110 GH120	PR510 PR905 PR1210	ATH10E TH315 CY100H	GC1010 GC1020	KC514M KC515M KCK20 SP4019
	K20	OP1215	YBG152	VP15TF VP20RT	PC5300	TT6080	ACK3000 ACU2500 ACK300	AH120 AH9030 AH9130	PR905 PR1210	CY9020 CY150 PTH13S JP4120 GX2120	GC1020	KC514M KC520M KC524M KCK20 SP6519
	K30	OP1215		VP15TF VP20RT			ACK3000 ACU2500 ACK300	AH120		CY250 JS4045 GX2040		KC522M KC524M SP6519

## Hardness Comparison

Hardness				Tensile Strength
Rockwell	Hardness(RH)	Vickers Hardness(HV)	Brinell Hardness(BH)	
HRC	HRA	HV	HB	
70.0	86.6	1037		
69.5	86.3	1017		
69.0	86.1	997		
68.5	85.8	978		
68.0	85.5	959		
67.5	85.2	941		
67.0	85.0	923		
66.5	84.7	906		
66.0	84.4	889		
65.5	84.1	872		
65.0	83.9	856		
64.5	83.6	840		
64.0	83.3	825		
63.5	83.1	810		
63.0	82.8	795		
62.5	82.5	780		
62.0	82.2	766		
61.5	82.0	752		
61.0	81.7	739		
60.5	81.4	726		
60.0	81.2	713		2555
59.5	80.9	700		2500
59.0	80.6	688		2450
58.5	80.3	676		2395
58.0	80.1	664		2345
57.5	79.8	653		2295
57.0	79.5	642		2250
56.5	79.3	631		2205
56.0	79.0	620		2160
55.5	78.7	609		2115
55.0	78.5	599		2075
54.5	78.2	589		2035
54.0	77.9	579		1995
53.5	77.7	570		1955
53.0	77.4	561		1920
52.5	77.1	551		1885
52.0	76.9	543		1850
51.5	76.6	534		1815

Hardness				Tensile Strength
Rockwell	Hardness(RH)	Vickers Hardness(HV)	Brinell Hardness(BH)	
HRC	HRA	HV	HB	
51.0	76.3	501		1780
50.5	76.1	494		1750
50.0	75.8	488		1720
49.5	75.5	481		1690
49.0	75.3	474		1660
48.5	75.0	468		1630
48.0	74.7	461		1605
47.5	74.5	455		1575
47.0	74.2	449		1550
46.5	73.9	442		1525
46.0	73.7	436		1500
45.5	73.4	430		1475
45.0	73.2	424		1450
44.5	72.9	418		1430
44.0	72.6	413		1405
43.5	72.4	407		1385
43.0	72.1	401		1360
42.5	71.8	396		1340
42.0	71.6	391		1320
41.5	71.3	385		1300
41.0	71.1	380		1280
40.5	70.8	375		1260
40.0	70.5	370		1245
39.5	70.3	365		1225
39.0	70.0	360		1210
38.5		355		1190
38.0		350		1175
37.5		345		1160
37.0		341		1140
36.5		336		1125
36.0		332		1110
35.5		327		1095
35.0		323		1080
34.5		318		1065
34.0		314		1050
33.5		310		1035
33.0		306		1020
32.5		302		1010

## Hardness Comparison

Hardness				Tensile Strength
Rockwell	Hardness(RH)	Vickers Hardness(HV)	Brinell Hardness(BH)	
HRC	HRA	HV	HB	
32.0		304	298	995
31.5		300	294	980
31.0		296	291	970
30.5		292	287	960
30.0		289	283	950
29.5		285	280	935
29.0		281	276	920
28.5		278	273	910
28.0		274	269	900
27.5		271	266	890
27.0		268	263	880
26.5		264	260	870
26.0		261	257	860
25.5		258	254	850
25.0		255	251	835
24.5		252	248	830

Hardness				Tensile Strength
Rockwell	Hardness(RH)	Vickers Hardness(HV)	Brinell Hardness(BH)	
HRC	HRA	HV	HB	
24.0		249	245	820
23.5		246	242	810
23.0		243	240	800
22.5		240	237	790
22.0		237	234	785
21.5		234	232	775
21.0		231	229	765
20.5		229	227	760
20.0		226	225	750
19.5		223	222	745
19.0		221	220	735
18.5		218	218	730
18.0		216	216	725
17.5		214	214	715
17.0		211	211	710

