

New products for machining technicians

NEW Circular Thread Milling Cutter – Type H



▲ Specialist for thread production in hardened and difficult-to-machine materials



Solid drilling and bore machining

- 1 HSS drilling
- 2 Solid carbide drilling
- 3 Indexable insert drilling
- 4 Reaming and Countersinking
- 5 Spindle Tooling

Threading

- 6 Taps and thread formers
- 7 Circular and Thread Milling
- 8 Thread turning

7

Turning

- 9 Turning Tools
- 10 EcoCut
- 11 Grooving Tools
- 12 Miniature turning tools

Milling

- 13 HSS Milling Cutters
- 14 Solid Carbide milling cutters
- 15 Milling tools with indexable inserts

Tool Clamping

- 16 Adapters
- 17 Accessories

- 18 Material examples and article no. index

Table of contents

Symbol explanation	2
Overview Circular and Thread Milling Cutters	3
Toolfinder	4+5
Product programme	6-66
Technical Information	
Cutting Data	67-71
Milling Procedures	72
Calculation of cutting data for thread milling	73
Thread type – Tool type – Coatings	74

WNT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **WNT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.





WNT \ Standard

Quality tools for standard applications.





The quality tools of the **WNT Standard** product line are high quality, powerful and reliable and enjoy the highest trust of our customers worldwide. Tools from this product line are the first choice for many standard applications and guarantee optimal results.

Symbol explanation

Version

	No drilling required
	Central internal coolant
	Lateral internal coolant
	Coolant supply either via the flange or centrally
VHM	Solid carbide


Shank

DIN 6535		
DIN 1835		










- = Main application
- = Extended application



Thread / Flank angle

M	Explanation of the types of thread can be found on → Page 74 .
	Flank angle 60°


Applications

	Circlip grooves DIN 471/472
	Full radius slot milling
	Slot milling
	Multipurpose milling
	Chamfering and deburring
	Gear milling
	IR = internal right, IL = internal left
	ER = external right, EL = external left
	IR/IL + ER/EL

Overview Circular and Thread Milling Cutters

Modular Circular Milling Cutters with Carbide Indexable Inserts

- ▲ the perfect tool for every application
- ▲ various holders, depending on overhang
- ▲ the same threading insert for different pitches and diameters
- ▲ highest flexibility and stability
- ▲ in addition to circular thread milling, circular and linear milling operations can also be carried out

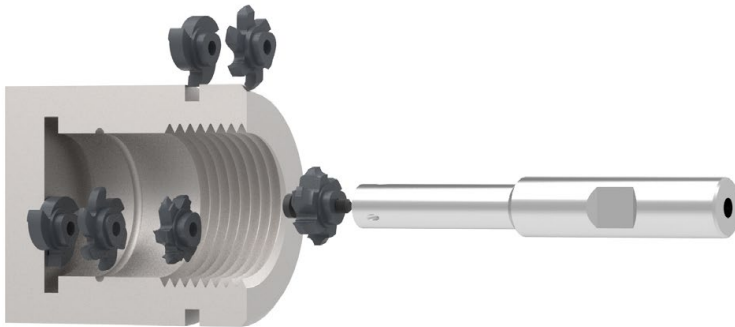


1st choice for small batch sizes
and large threads

7

Thread Milling Cutters with Indexable Carbide Inserts

- ▲ exchange of the insert for different threads
- ▲ same threading insert for different diameters

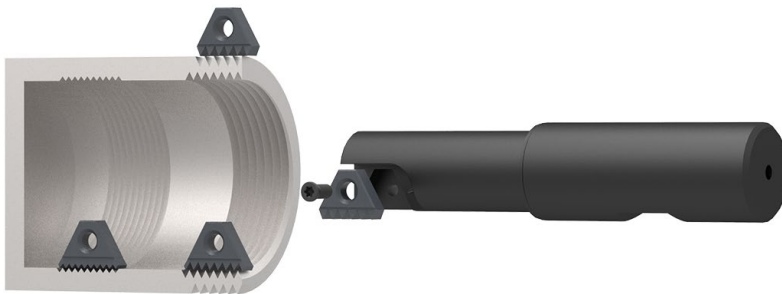


Solid Carbide Thread Milling Cutters

- ▲ short machining times, ideal for volume production
- ▲ one tool for all thread types
- ▲ one thread milling cutter for different diameters with the same pitch



MicroMill

















SGF




UNI

Toolfinder

					from bore diameter in mm
Modular Circular Milling Cutters with Carbide Indexable Inserts	Polygon		<ul style="list-style-type: none"> ▲ high power transmission through polygon connection ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel 	9.6	
	Mini Mill		<ul style="list-style-type: none"> ▲ three interlocking rib location ▲ compatible with popular manufacturer systems ▲ 3 and 6 edged inserts ▲ stable holders in solid carbide and steel 	9.6	
	System 300		<ul style="list-style-type: none"> ▲ proven circular milling tool ▲ 3 edged inserts 	7.9	
Thread Milling Cutters with Indexable Carbide Inserts	MWN		<ul style="list-style-type: none"> ▲ multi tooth thread milling cutter ▲ double sided inserts ▲ exclusively for thread production ▲ holder for tapered threads 	9.0	
	GZD		<ul style="list-style-type: none"> ▲ multi tooth drilling and thread milling cutter ▲ for thread milling in solid material ▲ core hole and thread with one tool 	14.0	
	GZG		<ul style="list-style-type: none"> ▲ multi tooth thread milling cutter ▲ exclusively for thread production 	18.5	
	EAW		<ul style="list-style-type: none"> ▲ single point thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for thread production ▲ insert holder with cylindrical shank DIN 1835 	17.5	
	EWM		<ul style="list-style-type: none"> ▲ single point thread milling cutter ▲ inserts with 2 or 4 cutting edges ▲ exclusively for thread production ▲ integral insert holder to DIN 69871 	43.0	
Solid Carbide Thread Milling Cutters	Micro Mill		<ul style="list-style-type: none"> ▲ solid carbide circular milling cutter for small diameters 	1.25	
	UNI		<ul style="list-style-type: none"> ▲ circular hole and thread milling cutter ▲ core hole, countersink and thread with one tool ▲ up to 3xD in short or long chipping materials 	4.5	
	H		<ul style="list-style-type: none"> ▲ circular thread milling cutters ▲ core hole, countersink and thread with one tool ▲ specifically for hardened materials, up to 2xD 	2.3	
	HR		<ul style="list-style-type: none"> ▲ single point thread milling cutter ▲ exclusively for thread production ▲ up to 3xD in materials up to 63 HRC 	4.0	
	SFSE		<ul style="list-style-type: none"> ▲ solid carbide thread milling cutter with chamfering facet ▲ only one tool for threading and chamfering 	2.4	
	SGF		<ul style="list-style-type: none"> ▲ solid carbide thread milling cutter without chamfering facet ▲ exclusively for thread production 	3.15	

Thread / Flank angle								Applications					Tool holder
													
M	G	BSW	UN	UNC	Pg	NPT	Tr						
MF		BSF		UNF									
11+12	13	13		15			14	6+7	8+9	10	10	16+17	18+19
27+28	28							20+21	22+23 24	23	25		29+30
34	35	35						31+32	33		33		36
37	38		38		39	39							40+41
42	42												43
44	45		46		45								47
48	48		48										49
50	50		50										51
53									52		52		
54													
55				55									
56													
57+59	57+59			58+60		58+60							
61+63 66	62+63	64		64+65									

Milling inserts for circlip grooves without chamfer

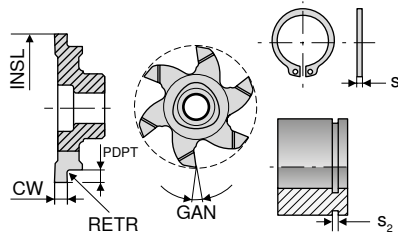

Ti500



Solid carbide
W2

Size	S ₂ H13 mm	INSL mm	CW _{-.003} mm	PDPT mm	RETR mm	GAN °	S ₁ mm	NOF	Article no. 50 880 ...	
									£	
6	0.90	9.6	0.98	1.20	0.3	6	0.80	3	76.79	292
	1.10	11.7	1.18	1.00	0.3	6	1.00	3	73.61	294
	1.30	11.7	1.38	1.00	0.3	6	1.20	3	73.61	296
	1.60	11.7	1.68	1.00	0.3	6	1.50	3	73.61	298
7	1.10	16.0	1.18	0.90	0.3	6	1.00	6	102.25	301
	1.30	16.0	1.38	1.10	0.3	6	1.20	6	82.35	302
	1.60	16.0	1.68	1.25	0.3	6	1.50	6	82.35	304
	1.85	16.0	1.93	1.25	0.3	6	1.75	6	82.35	306
	1.10	17.7	1.18	0.90	0.3	6	1.00	6	103.77	308
	1.30	17.7	1.38	1.10	0.3	6	1.20	6	103.77	309
	1.60	17.7	1.68	1.25	0.3	6	1.50	6	103.77	310
	1.85	17.7	1.93	1.25	0.3	6	1.75	6	103.77	311
9	1.10	20.0	1.18	0.90	0.3	6	1.00	6	106.68	313
	1.30	20.0	1.38	1.10	0.3	6	1.20	6	106.68	314
	1.60	20.0	1.68	1.25	0.3	6	1.50	6	106.68	315
	1.85	20.0	1.93	1.25	0.3	6	1.75	6	106.68	316
	1.60	21.7	1.68	1.25	0.3	6	1.50	6	107.93	318
	1.85	21.7	1.93	1.25	0.3	6	1.75	6	107.93	319
	2.15	21.7	2.23	1.75	0.3	6	2.00	6	107.93	320
	2.65	21.7	2.73	1.75	0.3	6	2.50	6	107.93	321
10	1.30	26.0	1.38	1.10	0.3	6	1.20	6	89.79	322
	1.60	26.0	1.68	1.25	0.3	6	1.50	6	89.79	324
	1.85	26.0	1.93	1.25	0.3	6	1.75	6	89.79	326
	2.15	26.0	2.23	1.75	0.3	6	2.00	6	89.79	328
	2.65	26.0	2.73	1.75	0.3	6	2.20	6	89.79	330
	3.15	26.0	3.23	2.20	0.3	6	3.00	6	89.79	332


- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{im} is used. Details on → Page 72+73.

Milling inserts for circlip grooves with chamfer

▲ both edges chamfered 0.1x45°

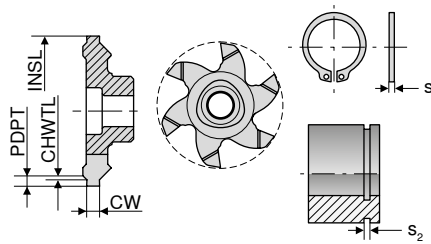

Ti500



Solid carbide
W2

Size	S ₂ H13 mm	INSL mm	CW _{-0.03} mm	PDPT mm	CHWTL mm	s ₁ mm	NOF	Article no.	
								50 879 ...	£
7	1.10	16.0	1.18	0.50	0.10	1.00	6	109.59	292
	1.30	16.0	1.38	0.85	0.15	1.20	6	90.62	302
	1.60	16.0	1.68	1.00	0.15	1.50	6	90.62	304
	1.85	16.0	1.93	1.25	0.20	1.75	6	90.62	306
9	1.10	20.0	1.18	0.50	0.10	1.00	6	116.64	307
	1.30	20.0	1.38	0.85	0.15	1.20	6	116.64	308
	1.60	20.0	1.68	1.00	0.15	1.50	6	116.64	309
	1.60	21.7	1.68	1.00	0.15	1.50	6	116.64	312
	1.85	20.0	1.93	1.25	0.20	1.75	6	116.64	310
	1.85	21.7	1.93	1.25	0.20	1.75	6	116.64	314
	2.15	21.7	2.23	1.50	0.20	2.00	6	116.64	316
2.65	21.7	2.73	1.75	0.20	2.50	6	116.64	318	
10	1.30	26.0	1.38	0.85	0.15	1.20	6	97.56	322
	1.60	26.0	1.68	1.00	0.15	1.50	6	97.56	324
	1.85	26.0	1.93	1.25	0.20	1.75	6	97.56	326
	2.15	26.0	2.23	1.50	0.20	2.00	6	97.56	328
	2.65	26.0	2.73	1.75	0.20	2.50	6	97.56	330
	3.15	26.0	3.23	1.75	0.20	3.00	6	97.56	332



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling insert without profile

- ▲ with double sided edge break of 0.1x45°
- ▲ size 7: from 5.0 mm groove width with ground chip breaker
- ▲ size 10: from 6.5 mm groove width with ground chip breaker

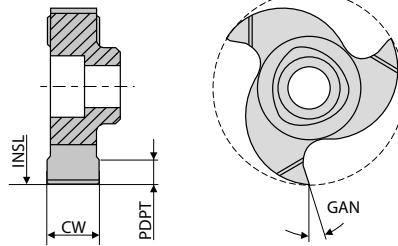

Ti500



Solid carbide
W2

Size	CW ± 0.02	INSL	PDPT	GAN	NOF	Article no. 50 875 ...	
	mm	mm	mm	°		£	
6	1.5	11.7	2.25	6	3	76.79	302
	2.0	11.7	2.25	6	3	76.79	304
	2.5	11.7	2.25	6	3	79.15	306
	3.0	11.7	2.25	6	3	79.15	308
7	3.5	16.0	3.50	0	3	49.75	310
	3.5	16.0	3.50	8	3	49.75	312
	3.5	16.0	3.50	12	3	49.75	314
	5.0	16.0	3.50	0	3	56.45	316
	5.0	16.0	3.50	8	3	56.45	318
	5.0	16.0	3.50	12	3	56.45	320
10	4.0	25.0	5.70	0	3	52.02	330
	4.0	25.0	5.70	8	3	52.02	332
	4.0	25.0	5.70	12	3	52.02	334
	5.0	25.0	5.70	8	3	104.05	337
	6.5	25.0	5.70	0	3	63.41	340
	6.5	25.0	5.70	8	3	63.41	342
	6.5	25.0	5.70	12	3	63.41	344
	8.0	25.0	5.70	0	3	70.12	350
	8.0	25.0	5.70	8	3	70.12	352
8.0	25.0	5.70	12	3	70.12	354	



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{im} is used. Details on → **Page 72+73.**

Milling insert without profile

▲ both edges chamfered 0.1x45°

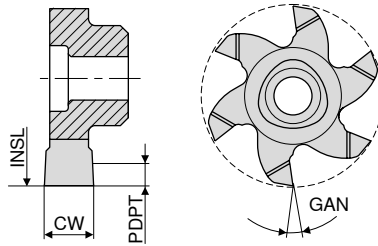

Ti500



Solid carbide
W2

Article no.
50 876 ...


Size	CW ± 0.02	INSL	PDPT	GAN	NOF		
	mm	mm	mm	°		£	
7	1.5	17.7	4.0	6	6	93.67	307
	2.0	17.7	4.0	6	6	94.21	308
	2.5	17.7	4.0	6	6	95.20	309
	3.0	16.0	3.5	6	6	86.06	302
	4.0	16.0	3.5	6	6	91.31	304
	5.0	16.0	3.5	6	6	93.67	306
9	1.5	21.7	5.0	6	6	107.93	314
	2.0	21.7	5.0	6	6	108.76	315
	2.5	21.7	5.0	6	6	108.76	316
	3.0	21.7	5.0	6	6	109.85	317
	3.0	20.0	4.2	6	6	109.85	311
	4.0	20.0	4.2	6	6	113.18	312
	5.0	20.0	4.2	6	6	118.98	313
10	1.5	27.7	6.8	6	6	133.51	330
	2.0	27.7	6.8	6	6	135.30	332
	2.5	27.7	6.8	6	6	135.30	334
	3.0	26.0	6.2	6	6	91.31	322
	3.0	27.7	6.8	6	6	136.85	336
	4.0	26.0	6.2	6	6	96.31	324
	5.0	26.0	6.2	6	6	120.51	326
	6.5	26.0	6.2	6	6	98.80	328

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{im} is used. Details on → **Page 72+73.**

Milling inserts for radius milling




Solid carbide
W2

Size	CRE	INSL	PDPT	NOF	Article no. 50 886 ...	
	mm	mm	mm		£	
6	1.100	9.6	1.20	3	73.61	702
	0.788	11.7	2.25	3	73.61	704
	1.100	11.7	2.25	3	73.61	708
	1.190	11.7	2.25	3	73.61	706
7	0.788	17.7	4.20	6	93.12	712
	1.100	17.7	4.20	6	93.12	714
9	0.785	21.7	5.00	6	112.20	720
	1.000	21.7	5.00	6	112.20	722
	1.200	21.7	5.00	6	112.20	724
	1.400	21.7	5.00	6	112.20	726
	1.500	21.7	5.00	6	112.20	728

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

Milling inserts for chamfering and deburring



Solid carbide
W2



Size	PDPT	INSL	NOF	Article no. 50 884 ...	
	mm	mm		£	
6	1.2	9.6	3	73.61	292
	1.5	11.7	3	73.61	294
7	1.9	16.0	6	88.96	302
	1.3	17.7	6	111.37	304
9	1.9	20.0	6	114.98	312
	1.6	21.7	6	112.20	314
10	2.1	26.0	6	97.56	322

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•


→ v_c/f_z Page 70

Thread milling insert – Partial profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!



Ti500



Solid carbide
W2

Size	TP mm	INSL mm	CF mm	NOF	Article no. 50 882 ...	
					£	
6	1-3	11.7	0.10	3	106.40	292
7	1-3	17.7	0.10	6	119.40	306
	1-4	16.0	0.10	6	96.31	302
	2,5-4	16.0	0.25	6	119.40	304
9	1-2	21.7	0.10	6	121.07	314
	1-3	20.0	0.10	6	121.07	312
	2-4	21.7	0.15	6	121.07	316
10	1-3	26.0	0.10	6	103.64	322
	2,5-5	26.0	0.25	6	128.55	324



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

7

Thread milling insert – Full profile



Ti500



Solid carbide
W2

Size	TP	INSL	PDPT	NOF	Article no. 50 881 ...	£	
	mm	mm	mm				
6	1	9.6	0.572	3	129.90	292	
	1,5	9.6	0.875	3	129.90	293	
	2	10.5	1.157	3	129.90	296	
7	1,5	16.0	0.875	6	118.98	302	
	2	16.0	1.157	6	118.98	304	
	2,5	16.0	1.430	6	118.98	306	
	3	16.0	1.702	6	118.98	310	
	M20x2,5	16.0	1.430	6	124.95	308	¹⁾
9	1,5	20.0	0.875	6	152.07	312	
	2	20.0	1.157	6	152.07	314	
	M24x3	20.0	1.702	6	152.07	316	¹⁾
10	1,5	26.0	0.875	6	126.32	322	
	2	26.0	1.157	6	126.32	324	
	3	26.0	1.702	6	126.32	330	
	3,5	26.0	1.982	6	126.32	332	
	4	26.0	2.263	6	126.32	334	
	4,5	26.0	2.553	6	126.32	336	
	5	26.0	2.836	6	156.62	337	
	M30x3,5	24.0	1.982	6	156.62	331	¹⁾
	M36x4	26.0	2.263	6	156.62	335	¹⁾

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●



1) profile corrected

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Full profile

▲ 50 883 322 for threads > 1"



Ti500



Solid carbide
W2

Size	TPI	TP	INSL	PDPT	NOF	Article no. 50 883 ...	£
6	19	1.337	9.6	0.871	3		129.90
							292
7	14	1.814	17.7	1.177	6		144.70
	14	1.814	16.0	1.177	6		147.64
	11	2.309	16.0	1.494	6		118.98
	10	2.540	16.0	1.646	6		147.64
9	14	1.814	20.0	1.177	6		152.07
	11	2.309	20.0	1.494	6		152.07
10	11	2.309	26.0	1.494	6		126.32
							322

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●



→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.


7

Thread milling insert – Full profile

▲ DIN 103



Ti500



Solid carbide
W2

Size	TP mm	INSL mm	PDPT mm	NOF	Thread	Article no. 50 872 ...	
						£	
6	2	11.7	1.25	3	Tr 16x2 - Tr 20x2	75.50	292
	3	11.0	1.75	3	Tr 18x3 - Tr 20x3	75.50	294
	4	12.0	2.25	3	Tr 20x4	75.50	296 ¹⁾
7	3	14.0	1.75	3	Tr 24x3 - Tr 32x3	102.99	302 ²⁾
	5	15.3	2.75	3	Tr 28x5 - Tr 36x5	102.99	306 ³⁾
	5	15.3	2.75	3	Tr 26x5	102.99	304 ³⁾
	6	16.2	3.50	3	Tr 34x6 - Tr 42x6	102.99	310 ²⁾
	6	16.2	3.50	3	Tr 30x6 - Tr 32x6	102.99	308 ²⁾
10	5	25.0	2.75	3	Tr 44x5 - Tr 48x5	130.41	322 ⁴⁾
	7	22.0	3.75	3	Tr 38x7 - Tr 42x7	130.41	324 ⁴⁾
	7	22.0	3.75	3	Tr 44x7	130.41	326 ¹⁾
	8	25.0	4.50	3	Tr 46x8 - Tr 48x8	151.03	328 ⁴⁾
	8	25.0	4.50	3	Tr 50x8 - Tr 52x8	151.03	330 ⁴⁾
	9	25.0	5.00	3	Tr 55x9 - Tr 60x9	151.03	332 ⁴⁾
	10	25.0	5.50	3	Tr 65x10 - Tr 80x10	151.03	334 ⁴⁾

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●



- 1) profile corrected
- 2) Not suitable for the 50 805 011 and 50 805 010 holders
- 3) Not suitable for the 50 805 011 and 50 805 010 holders / profile corrected
- 4) Not suitable for the 50 805 026, 50 805 025 and 50 805 024 holders

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!



Ti500



Solid carbide
W2

Size	TPI	INSL	PDPT	NOF	Article no. 50 886 ...	£
	1/''	mm	mm			
6	12.0	9.6	1.228	3		129.90 202
	11.0	10.5	1.355	3		129.90 204
	10.0	11.7	1.485	3		129.90 206
7	9.0	16.0	1.577	6		147.64 212
9	8.0	18.0	1.809	6		152.07 222
	7.0	20.0	2.043	6		152.07 224
10	6.0	24.0	2.454	6		156.62 232
	5.0	26.0	2.979	6		156.62 234
	4.5	26.0	3.289	6		156.62 236



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 70

7

Thread milling insert – Full profile

▲ with holder 50 805 010 / 50 805 011 maximum pitch of 3 mm is possible!



Ti500



Solid carbide
W2


Size	Thread	INSL	PDPT	NOF	Article no. 50 886 ...	£
		mm	mm			
6	1/2 - 20	9.6	0.733	3		129.90 302
	9/16 - 18	10.5	0.827	3		129.90 304
	3/4 - 16	11.7	0.945	3		129.90 306
7	7/8 - 14	17.7	1.071	6		144.70 312
9	1 - 12	20.0	1.228	6		144.70 322

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●


→ v_c/f_z Page 70

Gear cutters, DIN 5480

▲ Z_w = Tooth Number Wave



Ti500




Size	Wave	Module	Z_w	CW	INSL	PDPT	NOF	Solid carbide	
								W2	
								Article no.	
								50 874 ...	
								£	
7	W11	0.80	12	3	15.85	0.80	6	102.09	011
	W14	0.80	16	3	16.00	0.80	6	102.09	014
	W16	0.80	18	3	16.00	0.80	6	102.09	016
	W20	0.80	24	3	16.00	0.80	6	102.09	020
	W24	1.25	18	4	16.00	1.25	6	110.06	024
	W25	2.00	11	7	16.00	2.00	3	125.89	025
	W30	1.25	22	4	16.00	1.25	6	110.06	031
	W30	1.25	20	5	16.00	1.25	6	110.06	030
	W35	2.00	16	5	16.00	2.00	6	113.26	035
	W42	1.25	32	4	16.00	1.25	6	110.06	042
W50	2.00	24	5	16.00	2.00	6	113.26	050	

Gear cutters, DIN 5481

▲ Z_w = Tooth Number Wave



Ti500



Size	Wave	Z_w	CW	INSL	CRE	PDPT	NOF	Solid carbide	
								W2	
								Article no.	
								50 874 ...	
								£	
10	26 x 30	35	3	26	0.3	1.638	6	102.09	126
	40 x 44	38	3	26	0.4	1.940	6	102.09	140


Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 70


i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Gear cutters, DIN 5482

▲ Z_w = Tooth Number Wave



Ti500



Size	Wave	Module	Z_w	CW	INSL	PDPT	NOF	Solid carbide	
								W2	Article no.
7	15 x 12	1.60	8	3.0	16	1.50	6	50 874 ...	
	17 x 14	1.60	9	5.0	16	1.50	6	£	
	20 x 17	1.60	12	5.0	16	1.50	6	113.26	215
	25 x 22	1.60	14	5.0	16	1.65	6	102.09	217
10	35 x 31	1.75	18	6.5	26	2.00	6	102.09	220
	55 x 50	2.00	26	6.5	26	2.75	6	113.26	225
Steel									●
Stainless steel									●
Cast iron									●
Non ferrous metals									●
Heat resistant alloys									●
Hardened materials									●



→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

7



Polygon circular end milling cutter

- ▲ for maximum machining depth, note insert width (CW)
- ▲ size 6 = for INSL 9,6; 10,5; 11,7; 12
- ▲ size 7 = for INSL 16; 17,7
- ▲ size 9 = for INSL 18; 20; 21,7
- ▲ size 10 = for INSL 24; 25; 26; 27,7

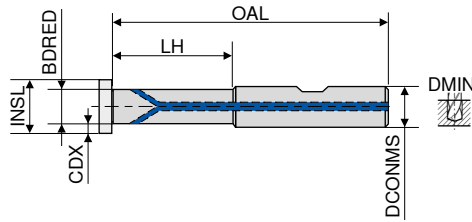

Size	LH mm	CDX mm	DCONMS _{n6} mm	OAL mm	BDRED mm	DMIN mm	torque moment Nm	HM W1	
								Article no. 50 805 ... £	Article no. 50 805 ... £
6	20.00	2.25	12	67.5	7.0	12	1,0		223.16 050 ¹⁾
	20.00	2.25	12	67.5	7.0	12	1,0		347.67 052
	20.00	2.25	12	67.5	7.0	12	1,0	347.67	366.49 053
	30.00	2.25	12	80.0	7.0	12	1,0	366.49	394.58 055
	40.00	2.25	12	100.0	7.0	12	1,0	394.58	
	40.00	2.25	12	100.0	7.0	12	1,0		
7	20.90	4.00	12	67.4	9.0	18	1,1		160.64 002 ¹⁾
	21.00	4.00	12	67.4	9.0	18	1,1		469.70 004
	21.00	4.00	12	67.4	9.0	18	1,1	347.67	451.46 008
	36.00	4.00	12	82.4	9.0	18	1,1	371.20	
	36.00	4.00	12	82.4	9.0	18	1,1	462.77	
		4.00	12	122.5	12.0	18	1,1	616.19	
9	29.75	5.00	16	80.0	11.5	22	3,8		223.16 070 ¹⁾
	30.00	5.00	16	80.0	11.5	22	3,8		411.03 071
	30.00	5.00	16	80.0	11.5	22	3,8	411.03	422.79 073
	50.00	5.00	16	100.0	11.5	22	3,8	422.79	
	50.00	5.00	16	100.0	11.5	22	3,8		
10	20.50	5.70	16	105.0	15.5	28	5,5	870.75	025
	20.50	6.80	16	149.7	15.5	28	5,5	601.68	024
	20.50	6.80	20	175.4	15.5	28	5,5	681.09	026
	30.40	6.80	16	79.6	13.6	28	5,5		168.10 012 ¹⁾
	30.50	6.80	16	79.6	13.6	28	5,5	411.03	015
	30.50	6.80	16	79.6	13.6	28	5,5		469.70 014
	45.50	6.80	16	94.6	13.6	28	5,5	422.79	021
	45.50	6.80	16	94.6	13.6	28	5,5		280.92 020
	60.50	6.80	16	109.6	13.6	28	5,5		290.13 022
	60.50	6.80	16	109.6	13.6	28	5,5	446.30	023

1) Steel version




Spare parts

Size	Article no. 80 950 ...		Article no. 70 960 ...	
	£		£	
6	13.49	125	5.70	246
7	13.49	125	5.70	231
9	15.77	128	5.70	236
10	16.56	129	5.70	243



Polygon circular screw-in milling cutter

- ▲ size 7 = for INSL 16; 17,7
- ▲ size 10 = for INSL 25; 26
- ▲ steel version

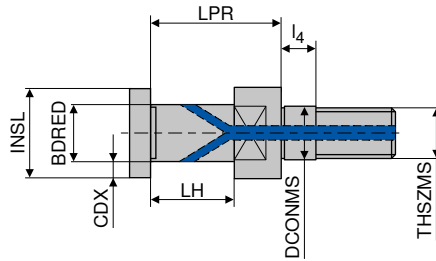

Size	CDX	LH	DCONMS _{h6}	LPR	THSZMS	TQX	BDRED	l_4	torque moment	W1
	mm	mm	mm	mm		Nm	mm	mm	Nm	Article no.
7	3.5	16.0	8.5	26.0	M8	25	9.0	5.5	1,1	50 799 ...
										£ 279.47
										002
10	5.7	25.5	12.5	38.5	M12	60	13.6	5.0	5,5	279.47
										012

7






Spare parts

Size	Article no.	£	125	Article no.	£	231
7	T08 - IP	13.49	125	M3x13	5.70	231
10	T20 - IP	16.56	129	M5x13,5	5.70	243

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for circlip grooves

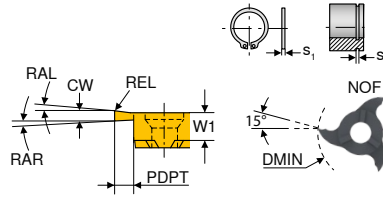




Size	DMIN mm	S ₂ H13 mm	CW ^{-0,02} mm	PDPT mm	W1 mm	RAR °	REL mm	s ₁ mm	NOF	W2	
										Article no. 53 006 ...	£
10	10	0.70	0.74	1.5	3.50	1		0.60	3	67.52	070
	10	0.80	0.84	1.5	3.50	1		0.70	3	67.52	080
	10	0.90	0.94	1.5	3.50	1		0.80	3	67.52	090
	10	1.10	1.21	1.5	3.50	3		1.00	3	60.48	110
	10	1.30	1.41	1.5	3.50	3	0.10	1.20	3	60.48	130
	10	1.60	1.71	1.5	3.50	3	0.10	1.50	3	60.48	160
	12	1.10	1.21	2.5	3.50	3		1.00	3	60.48	112
	12	1.30	1.41	2.5	3.50	3	0.10	1.20	3	60.48	132
12	1.60	1.71	2.5	3.50	3	0.10	1.50	3	60.48	162	
18	18	0.70	0.74	1.5	5.75	1		0.60	3	69.05	270
	18	0.80	0.84	1.7	5.75	1		0.70	3	69.05	280
	18	0.90	0.94	1.9	5.75	1		0.80	3	69.05	290
	18	1.10	1.21	3.5	5.75	3		1.00	3	64.90	310
	18	1.30	1.41	3.5	5.75	3	0.10	1.20	3	64.90	330
	18	1.60	1.71	3.5	5.75	3	0.10	1.50	3	64.90	360
22	22	0.70	0.74	1.5	5.70	1		0.60	3	73.32	470
	22	0.80	0.84	1.7	5.70	1		0.70	3	73.32	480
	22	0.90	0.94	1.9	5.70	1		0.80	3	65.58	490
	22	1.00	1.04	2.1	5.70	1		0.90	3	69.44	500
	22	1.10	1.21	2.5	5.70	1		1.00	3	69.44	510
	22	1.30	1.41	4.5	5.70	3	0.10	1.20	3	66.13	530
	22	1.60	1.71	4.5	5.70	3	0.10	1.50	3	66.13	560
	22	1.85	1.96	4.5	5.70	3	0.15	1.75	3	66.13	585
	22	2.15	2.26	4.5	5.70	3	0.15	2.00	3	66.13	615
	22	2.65	2.76	4.5	5.70	3	0.15	2.50	3	66.13	665
	22	3.15	3.26	4.5	5.70	3	0.20	3.00	3	66.13	415
	22	4.15	4.26	4.5	5.70	3	0.20	4.00	3	66.13	515
22	5.15	5.26	4.5	5.70	3	0.20	5.00	3	66.13	605	

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ○
- Hardened materials ○

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for circlip grooves with chamfer facet

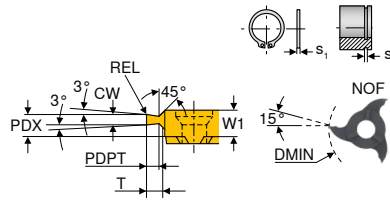

Size	DMIN mm	S ₂ H13 mm	CW ^{-0,02} mm	T mm	PDPT mm	W1 mm	PDX mm	REL mm	s ₁ mm	NOF	W2	
											Article no.	£
22	22	1.10	1.21	0.50	0.49	5.85	5.07		1.00	3	53 006 ...	
	22	1.30	1.41	0.70	0.67	5.85	5.17		1.20	3	71.67	805
	22	1.30	1.41	0.85	0.83	5.85	5.17		1.20	3	71.67	807
	22	1.60	1.71	0.85	0.83	5.85	5.07		1.50	3	71.67	808
	22	1.60	1.71	1.00	0.97	5.85	5.07		1.50	3	71.67	809
	22	1.85	1.96	1.25	1.23	5.85	5.19	0.15	1.75	3	71.67	810
	22	2.15	2.26	1.50	1.47	5.85	5.34	0.15	2.00	3	71.67	811
	22	2.65	2.76	1.75	1.72	5.85	5.09	0.15	2.50	3	71.67	812
	22	2.65	2.76	1.50	1.47	5.85	5.09	0.15	2.50	3	71.67	815
	22	3.15	3.26	1.75	1.72	5.85	5.34	0.20	3.00	3	71.67	816
	22	4.15	4.26	2.50	2.47	5.85	5.34	0.20	4.00	3	71.67	818
	22	4.15	4.26	2.00	1.97	5.85	5.34	0.20	4.00	3	71.67	825
											71.67	820


Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○

→ v_c/f_z Page 71




i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

7

MiniMill – Milling insert for groove milling



CWX500




Size	DMIN	CW _{-0.02}	PDPT	W1	REL	NOF	W2		
							Article no.	Price	
10	10	1.0	1.5	3.50		3	53 007 ...	£ 67.52	010
	10	1.5	1.5	3.50	0.2	3		60.48	015
	10	2.0	1.5	3.50	0.2	3		60.48	020
	10	2.5	1.5	3.50	0.2	3		60.48	025
	12	1.5	2.0	3.50	0.2	6		60.93	114
	12	1.5	2.5	3.50	0.2	3		60.48	115
	12	2.0	2.0	3.50	0.2	6		60.93	119
	12	2.0	2.5	3.50	0.2	3		60.48	120
	12	2.5	2.5	3.50	0.2	3		60.48	125
14	14	1.0	2.5	4.50		3		69.05	210
	14	1.5	2.5	4.50	0.2	3		63.37	215
	14	2.0	2.5	4.50	0.2	3		63.37	220
	14	2.5	2.5	4.50	0.2	3		63.37	225
	16	1.5	3.5	4.50	0.2	3		63.37	315
	16	2.0	3.5	4.50	0.2	3		63.37	320
	16	2.5	3.5	4.50	0.2	3		63.37	325
18	18	1.5	3.5	5.75	0.1	6		68.97	414
	18	1.5	3.5	5.75	0.2	3		64.90	415
	18	2.0	3.5	5.75	0.2	6		68.97	419
	18	2.0	3.5	5.75	0.2	3		64.90	420
	18	2.5	3.5	5.75	0.2	6		68.97	424
	18	2.5	3.5	5.75	0.2	3		64.90	425
	18	3.0	3.5	5.75	0.2	6		68.97	429
	18	3.0	3.5	5.75	0.2	3		64.90	430
	18	4.0	3.5	5.75	0.2	3		37.68	440
22	22	1.0	4.5	6.20	0.1	6		67.54	810
	22	1.5	4.5	6.20	0.1	6		146.66	815
	22	1.5	4.5	5.70	0.2	3		77.36	515
	22	2.0	4.5	5.70	0.2	3		77.36	520
	22	2.0	4.5	6.20	0.2	6		146.66	820
	22	2.5	4.5	5.70	0.2	3		77.36	525
	22	2.5	4.5	6.20	0.2	6		146.66	825
	22	3.0	4.5	5.70	0.2	3		77.36	530
	22	3.0	4.5	6.20	0.2	6		146.66	830
	22	3.5	4.5	5.70	0.2	3		39.36	535
	22	4.0	4.5	5.70	0.2	3		77.36	540
	22	4.0	4.5	6.20	0.2	6		146.66	840
	28	25	2.0	5.0	6.50	0.2	3		77.36
25		2.5	5.0	6.50	0.2	3		77.36	625
25		3.0	5.0	6.50	0.2	3		77.36	630
25		3.5	5.0	6.50	0.2	3		77.36	635
25		4.0	5.0	6.50	0.2	3		77.36	640
28		1.0	6.5	6.25	0.1	6		75.08	610
28		1.5	6.5	6.25	0.1	6		74.05	615
28		1.5	6.5	6.50	0.2	3		77.36	715
28		2.0	6.5	6.25	0.2	6		74.96	721
28		2.0	6.5	6.50	0.2	3		77.36	720
28		2.5	6.5	6.25	0.2	6		75.74	726
28		2.5	6.5	6.50	0.2	3		77.36	725
28		3.0	6.5	6.50	0.2	3		77.36	730
28		3.0	6.5	6.25	0.2	6		76.52	731
28		3.5	6.5	6.50	0.2	3		77.36	735
28		4.0	6.5	6.25	0.2	6		78.21	741
28		4.0	6.5	6.50	0.2	3		77.36	740
28		5.0	6.5	6.50	0.2	3		45.08	750
28		6.0	6.5	6.50	0.2	3		46.00	760

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○




→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for groove milling (specialist for aluminium)



CWX500




Size	DMIN	CW _{+0.02}	PDPT	W1	REL	NOF	W2	
	mm	mm	mm	mm	mm		Article no.	
28	32	2.0	8.5	6.5	0.2	3	53 007 ...	
	32	2.5	8.5	6.5	0.2	3	£ 86.34	920
	32	3.0	8.5	6.5	0.2	3	£ 86.34	925

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	•
Heat resistant alloys	
Hardened materials	




→ v_c/f_z Page 71

7

MiniMill – Milling insert for groove milling with full radius



CWX500




Size	DMIN	CW _{+0.03}	PDPT	W1	REL	NOF	W2	
	mm	mm	mm	mm	mm		Article no.	
10	12	2.2	2.5	3.50	1.1	3	53 008 ...	
14	16	2.2	3.5	4.60	1.1	3	£ 77.36	011
18	18	2.2	3.5	5.75	1.1	3	£ 78.87	111
22	22	1.0	4.5	5.75	0.5	3	£ 80.25	211
	22	1.6	4.5	5.75	0.8	3	£ 46.76	305
	22	2.0	4.5	5.75	1.0	3	£ 47.55	308
	22	2.4	4.5	5.75	1.2	3	£ 46.76	310
	22	2.8	4.5	5.75	1.4	3	£ 48.47	312
	22	3.0	4.5	5.75	1.5	3	£ 80.25	314
	22	3.0	4.5	5.75	1.5	3	£ 46.76	315
	22	4.0	4.5	5.75	2.0	3	£ 46.76	320
	22	4.4	4.5	5.75	2.2	3	£ 48.21	322
22	5.0	4.5	5.75	2.5	3	£ 50.01	325	

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	○
Hardened materials	○




→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for groove milling, cross-pitched



CWX500




Size	DMIN	INSL	CW _{-0,02}	PDPT	W1	REL	NOF	W2	
								Article no.	53 015 ...
10	12	11.7	1.5	2.0	3.5	0.2	6	£ 57.08	114
	12	11.7	2.0	2.0	3.5	0.2	6	£ 57.08	119
14	16	15.7	1.5	2.5	4.5	0.2	6	£ 58.19	314
	16	15.7	2.0	2.5	4.5	0.2	6	£ 58.19	319
	16	15.7	2.5	2.5	4.5	0.2	6	£ 58.19	324
18	18	17.7	2.0	4.0	5.8	0.2	6	£ 64.91	419
	18	17.7	2.5	4.0	5.8	0.2	6	£ 64.91	424
	18	17.7	3.0	4.0	5.8	0.2	6	£ 64.91	429
	20	19.7	2.0	5.0	5.8	0.2	6	£ 64.91	469
	20	19.7	2.5	5.0	5.8	0.2	6	£ 64.91	474
	20	19.7	3.0	5.0	5.8	0.2	6	£ 64.91	479
22	22	21.7	2.0	4.5	6.2	0.2	6	£ 62.67	820
	22	21.7	2.5	4.5	6.2	0.2	6	£ 62.67	825
	22	21.7	3.0	4.5	6.2	0.2	6	£ 62.67	830
	22	21.7	4.0	4.5	6.2	0.2	6	£ 62.67	840
	37	36.7	1.5	12.0	6.2	0.1	6	£ 81.71	865
	37	36.7	2.0	12.0	6.2	0.2	6	£ 81.71	870
28	25	24.8	2.5	5.0	6.4	0.2	6	£ 71.63	626
	25	24.8	3.0	5.0	6.4	0.2	6	£ 71.63	631
	25	24.8	4.0	5.0	6.4	0.2	6	£ 74.99	641
	25	24.8	5.0	5.0	6.4	0.2	6	£ 78.34	651
	25	24.8	6.0	5.0	6.4	0.2	6	£ 79.46	661
	28	27.7	2.5	6.5	6.2	0.2	6	£ 71.63	726
	28	27.7	3.0	6.5	6.2	0.2	6	£ 71.63	731
	28	27.7	4.0	6.5	6.2	0.2	6	£ 73.86	741
	28	27.7	5.0	6.5	6.2	0.2	6	£ 74.99	751
	28	27.7	6.0	6.5	6.2	0.2	6	£ 74.99	761
	35	34.7	2.0	10.0	6.2	0.2	6	£ 78.34	770
	35	34.7	2.5	10.0	6.2	0.2	6	£ 79.46	775
	35	34.7	3.0	10.0	6.2	0.2	6	£ 79.46	780

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○




→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for groove milling and chamfering



CWX500



Size	DMIN	CF _{-0,03}	PDPT	W1	KCH	PDX	NOF	W2	
	mm	mm	mm	mm	°	mm		Article no.	
10	10	0.2	0.35	3.60	15	1.80	6	53 009 ...	
	10	0.2	0.45	3.60	20	1.80	6	£ 61.32	015
	10	0.2	0.70	3.60	30	1.80	6	£ 61.32	020
	10	0.2	1.20	3.60	45	1.80	6	£ 61.32	030
	12	1.2	0.80	3.50	45	1.20	3	£ 61.32	045
								£ 52.02	035
14	16	1.4	1.20	4.50	45	1.60	3	£ 53.57	145
18	18	2.5	1.40	5.85	45	1.70	3	£ 54.39	258
	18	0.2	2.20	5.75	45	3.00	6	£ 67.96	259
22	22	2.0	1.70	5.85	45	2.00	3	£ 57.70	358
	22	0.2	2.50	6.40	45	3.90	6	£ 148.17	463
	22	3.0	3.00	9.40	45	3.25	3	£ 60.48	394 ¹⁾
28	28	0.2	1.90	6.05	45	3.75	6	£ 73.92	560

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○

1) use clamping screw 73 082 006





→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

7

MiniMill – Milling insert for part-off

- ▲ PDPT = 12.0 mm in combination with holder 53 003 624
- ▲ reduce feed rate by 50 %



Size	DMIN	CW ^{+0,02}	PDPT	W1	REL	NOF	W2	
	mm	mm	mm	mm	mm		Article no.	
22	37	0.5	12	5.6		6	53 013 ...	£
	37	0.6	12	5.7		6	113.30	705 ¹⁾
	37	0.8	12	6.0		6	107.30	706 ¹⁾
	37	1.0	12	6.2	0.1	6	105.87	708 ¹⁾
	37	1.5	12	6.2	0.1	6	108.95	710
							92.97	715

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○

1) the end face is not ground free to the center

→ v_c/f_z Page 71

MiniMill – Set for cut off

▲ size 22






Tool	Designation	Article no.	Hole-Ø mm	Piece	W1	
					Article no.	
Inserts	Milling inserts for separating	53 013 715	37	2	53 014 ...	£
Tool holder	Endmill short	53 003 624		1	305.06	990
Screw	M5 x 12	73 082 005		1		
Tightening Key	T20			1		

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{im} is used. Details on → Page 72+73.

MiniMill – Milling insert for internal thread milling – Partial profile

Mini Mill \geq M12



CWX500







Size	Thread _{min}	TP mm	DMIN mm	CF mm	PDPT mm	W1 mm	PDX mm	NOF	W2	
									Article no. 53 010 ...	£
10	M12	1,0 - 1,75	9.8	0.13	1.08	3.20	2.4	6	68.74	017
	M14	1,0 - 1,75	11.7	0.13	1.08	3.60	2.8	3	80.25	010
	M14	1,0 - 2,0	10.1	0.13	1.25	3.20	2.2	6	68.74	021
	M14	1,0 - 2,0	11.7	0.13	1.25	3.60	2.8	3	80.25	020
	M16	1,5 - 2,75	11.0	0.19	1.67	3.20	2.0	6	68.74	027
	M16	1,5 - 2,75	11.7	0.19	1.67	3.60	2.4	3	80.25	015
	M16	2,0 - 3,0	11.1	0.25	1.78	3.20	1.9	6	68.74	029
	M16	2,0 - 3,0	11.7	0.25	1.78	3.60	2.2	3	80.25	030
14	M18	1,0 - 1,75	15.7	0.12	1.08	4.60	3.8	3	81.62	210
	M18	1,0 - 2,0	15.7	0.12	1.25	4.60	3.5	3	81.62	220
	M20	1,5 - 2,75	15.7	0.18	1.67	4.60	3.5	3	81.62	215
	M22	2,5 - 3,0	15.7	0.31	1.78	4.60	3.4	3	81.62	230
18	M22	1,0 - 1,75	17.7	0.12	1.03	5.85	5.0	3	87.44	410
	M22	1,0 - 2,0	17.7	0.12	1.19	5.85	4.7	3	81.62	412
	M22	1,0 - 2,0	17.7	0.12	1.19	5.85	5.0	6	80.15	416
	M22	1,5 - 2,75	17.7	0.19	1.62	5.85	4.6	3	81.62	415
	M24	2,0 - 3,0	17.7	0.25	1.73	5.85	4.4	3	87.44	425
	M24	2,0 - 3,5	17.7	0.25	2.06	5.85	4.2	3	81.62	455
	M24	2,0 - 3,5	17.7	0.25	2.06	5.85	4.3	6	81.83	434
	M24	2,0 - 3,75	17.7	0.25	2.22	5.85	4.2	3	81.62	420
	M24	2,5 - 5,0	17.7	0.31	2.98	5.85	3.8	3	81.62	430
	M24	3,0 - 5,5	17.7	0.38	3.25	5.85	4.2	3	81.62	435
22	M27	1,0 - 2,0	21.7	0.12	1.19	5.85	4.6	3	84.55	610
	M27	1,0 - 2,0	21.7	0.12	1.19	6.20	5.0	6	173.76	710
	M27	1,5 - 2,75	21.7	0.18	1.62	5.85	4.5	3	84.55	615
	M27	2,0 - 3,75	21.7	0.25	2.22	5.85	4.2	3	84.55	620
	M27	2,5 - 4,5	21.7	0.25	2.70	5.85	3.7	3	87.44	655
	M27	2,0 - 4,5	21.7	0.25	2.70	6.05	4.2	6	178.48	755
	M30	2,5 - 5,0	21.7	0.31	2.98	5.85	3.8	3	84.55	630
	M30	3,5 - 6,0	21.7	0.44	3.52	5.85	3.4	3	87.44	640
	M30	3,5 - 6,5	21.7	0.44	3.84	5.85	3.2	3	87.44	645
28	M33	1,0 - 2,0	27.7	0.12	1.20	6.60	4.5	3	57.56	820
	M33	1,5 - 2,5	27.7	0.18	1.49	6.60	4.3	3	57.56	825
	M33	1,5 - 2,5	27.7	0.19	1.60	6.10	5.0	6	86.13	826
	M36	2,5 - 5,0	27.7	0.38	2.93	6.10	2.3	6	86.13	850
	M36	2,5 - 5,0	27.7	0.37	2.93	6.60	4.0	3	57.56	840
	M39	4,0 - 6,0	27.7	0.62	3.37	6.60	3.6	3	57.56	860

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ○

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Milling insert for internal thread milling – Full profile



CWX500







Size	Thread _{min}	TP	DMIN	CF	PDPT	W1	PDX	NOF	W2	
									Article no.	£
18	M22	1.50	17.7	0.18	0.81	5.85	4.8	3	53 011 ...	
	M22	1.75	17.7	0.20	0.95	5.85	4.7	3	84.55	415
	M22	2.00	17.7	0.25	1.08	5.85	4.6	3	89.94	417
	M24	2.50	17.7	0.31	1.35	5.85	4.4	3	89.94	420
	M27	3.00	17.7	0.37	1.62	5.85	4.3	3	89.94	425
	M27	3.50	17.7	0.43	1.89	5.85	4.0	3	89.94	430
22	M24	1.50	21.7	0.19	0.81	5.85	4.8	3	88.69	615
	M24	1.50	21.7	0.19	0.81	6.20	5.3	6	78.46	715
	M27	1.75	21.7	0.22	0.95	6.20	5.2	6	82.49	717
	M27	1.75	21.7	0.22	0.95	5.85	4.7	3	88.69	617
	M27	2.00	21.7	0.25	1.08	5.85	4.6	3	92.83	620
	M27	2.00	21.7	0.25	1.08	6.20	5.0	6	82.49	720
	M30	3.00	21.7	0.37	1.62	5.85	4.3	3	92.83	630
	M30	3.00	21.7	0.37	1.62	6.20	4.8	6	84.06	730
	M30	3.50	21.7	0.43	1.89	5.85	4.0	3	99.88	635
	M33	4.00	21.7	0.50	2.16	5.85	3.9	3	99.88	640
	M33	4.00	21.7	0.50	2.16	6.20	4.4	6	88.48	740
	M33	4.50	21.7	0.56	2.43	5.85	3.7	3	99.88	645

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ○

→ v_c/f_z Page 71

MiniMill – Milling insert for internal thread milling – Full profile



CWX500




Size	Thread _{min}	TP	DMIN	TPI	W1	PDX	PDPT	CRE	RETL	RETR	NOF	W2	
												Article no.	£
10	G 3/8"	1.34	11.7	19	3.60	2.5	0.860	0.18	0.18	0.18	3	53 012 ...	
	G 1/2"	1.81	11.7	14	3.60	2.3	1.160	0.24	0.24	0.24	3	99.63	113
	G 1"	2.31	11.7	11	3.60	2.0	1.480	0.31	0.31	0.31	3	99.63	118
18	-	1.34	17.7	19	5.85	4.9	0.856	0.18	0.18	0.18	3	50.01	219
	G 3/4"	1.81	17.7	14	5.85	4.6	1.160	0.24	0.24	0.24	3	50.01	214
	G 1"	2.31	17.7	11	5.85	4.4	1.480	0.31	0.31	0.31	3	50.01	211
22	G 1"	2.31	21.7	11	5.85	4.0	1.480	0.31	0.31	0.31	3	104.05	311
	-	3.17	21.7	8	5.85	3.5	2.030	0.43	0.43	0.43	3	111.25	308
	BSW 1 1/2"	4.23	21.7	6	5.85	3.1	2.710	0.58	0.58	0.58	3	111.25	306

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ○

→ v_c/f_z Page 71

MiniMill – Circular milling cutter, extra short

▲ steel Version

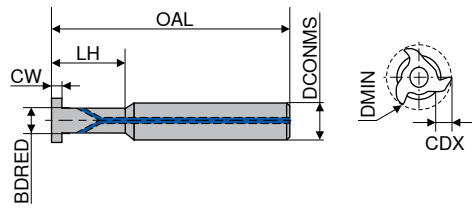


A Steel W1

Size	DCONMS _{h6} mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	Article no. 53 004 ...	
									£	
10	10	6.0	60	15.2	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	233.41	015
	14	8.0	60	17.7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	233.41	217
14	13	8.0	70	25.7	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	239.07	225
	18	9.0	60	17.0	17,7	≤5,6	3,5	4,5	233.41	417
18	13	9.0	70	25.0	17,7	≤5,6	3,5	4,5	239.07	425
	22	11.3	60	10.7	21,7	≤9,15	4,5	7,0	239.07	610
22	13	11.3	70	25.7	21,7	≤9,15	4	7,0	247.51	625
	28	13	14.0	70	10.7	27,7	≤10	6,5	7,0	239.07
20		14.0	100	35.7	27,7	≤10	6,5	7,0	247.51	835

MiniMill – Circular milling cutter, short

▲ steel Version

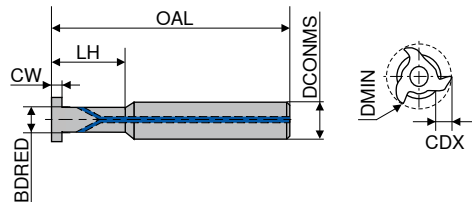

A Steel W1





B Steel W1




Size	DCONMS _{h6} mm	BDRED mm	OAL mm	LH mm	DMIN mm	CW mm	CDX mm	torque moment Nm	Article no. 53 002 ...		Article no. 53 003 ...	
									£		£	
10	16	6	80	12.0	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	269.92	012	269.92	012
14	16	8	80	16.0	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	269.92	216	269.92	216
18	16	9	80	18.0	17,7	≤5,6	3,5	4,5	264.11	418	264.11	418
22	16	12	80	24.0	21,7	≤9,15	4,5	7,0	267.02	624	267.02	624
28	20	14	100	35.7	27,7	≤10	6,5	7,0	506.78	835	506.78	835

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

MiniMill – Circular milling cutter, vibration-damped

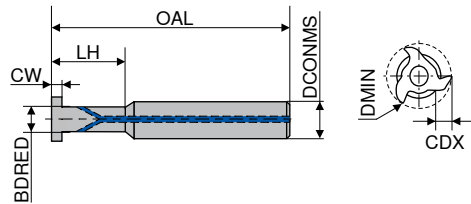

Size	DCONMS _{h6}	BDRED	OAL	LH	DMIN	CW	CDX	torque moment	HM W1			
									Article no. 53 001 ...	Article no. 53 000 ...		
	mm	mm	mm	mm	mm	mm	mm	Nm	£	£		
10	12	6.0	80	21	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	342.82	021	342.82	021
	12	6.0	90	30	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	371.04	030	371.04	030
	12	6.0	100	42	9,7 / 11,7	≤3,35	1,4 / 2,5	2,0	424.60	042	424.60	042
	12	7.3	90	30	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	387.92	130	387.92	130
	16	7.3	100	25	9,7 / 11,7	≤3,35	0,9 / 1,85	2,0	570.68	025	570.68	025
14	12	8.0	95	29	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	342.82	229	342.82	229
	12	8.0	110	42	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	373.81	242	373.81	242
	12	8.0	120	56	13,7 / 15,7	≤4,35	2,5 / 3,5	3,5	424.60	256	424.60	256
	12	9.5	110	42	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	424.60	342	424.60	342
	16	9.5	110	33	13,7 / 15,7	≤4,35	1,65 / 2,7	3,5	522.83	233	522.83	233
18	12	9.0	100	32	17,7	≤5,6	3,5	4,5	427.36	432	427.36	432
	12	9.0	100	45	17,7	≤5,6	3,5	4,5	477.86	445	477.86	445
	12	9.0	120	64	17,7	≤5,6	3,5	4,5	565.01	464	565.01	464
	16	9.0	93	25	17,7	≤5,6	3,5	4,5	477.86	425	477.86	425
	16	9.0	100	32	17,7	≤5,6	3,5	4,5	505.94	532	505.94	532
	16	9.0	110	45	17,7	≤5,6	3,5	4,5	593.10	545	593.10	545
	16	9.0	130	64	17,7	≤5,6	3,5	4,5	683.02	564	683.02	564
	16	13.0	110	64	17,7	≤5,6	1,5	4,5	522.83	465	522.83	465
	16	13.0	130	66	17,7	≤5,6	1,5	4,5	663.39	466	663.39	466
22	12		100	42	21,7	≤9,15	4,5	7,0	376.58	642	376.58	642
	12		130	60	21,7	≤9,15	4,5	7,0	446.87	660	446.87	660
	16	11.5	90	30	21,7	≤9,15	4,5	7,0	477.86	630	477.86	630
	16	12.0	100	42	21,7	≤9,15	4,5	7,0	497.50	742	497.50	742
	16	12.0	130	60	21,7	≤9,15	4,5	7,0	595.87	760	595.87	760
	16	12.0	160	85	21,7	≤9,15	4,5	7,0	677.50	685	677.50	685
	20	16.0	110	45	21,7	≤9,15	2,5	7,0	725.09	645	725.09	645
28	16	14.3	100	42	27,7 / 24,8	≤10	6,5 / 5	7,0	528.35	842	528.35	842
	16	14.3	130	60	27,7 / 24,8	≤10	6,5 / 5	7,0	626.71	860	626.71	860
	16	14.3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	733.64	885	733.64	885
	20	13.5	104	35	27,7 / 24,8	≤10	6,5 / 5	7,0	652.03	835	652.03	835
	20	14.3	160	85	27,7 / 24,8	≤10	6,5 / 5	7,0	834.65	985	834.65	985




Spare parts

Size		Article no. 80 950 ...		Article no. 73 082 ...		Article no. 73 082 ...	
		£		£		£	
10	T08	10.30	110			M2,6	7.14 002
14	T10	12.05	112			M3,5	7.14 003
18	T15	12.26	113			M4	7.14 004
22	T20	13.11	114	M5	13.96 006	M5	7.14 005
28	T20	13.11	114			M5	7.14 005

i Clamping screw 73 082 006 only for insert 53 009 394.

Milling inserts for circlip grooves without chamfer

System 300

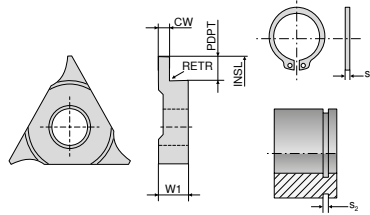

Ti500



Solid carbide
W2



Size	S ₂ H13 mm	INSL mm	W1 mm	CW _{-0.03} mm	PDPT mm	RETR mm	S ₁ mm	Article no. 50 853 ...	£
04	0.90	7.9	2.34	0.98	0.70	0.3	0.80	300	52.02
03	0.90	10.6	2.34	0.98	0.70	0.3	0.80	302	43.05
	1.10	10.6	2.34	1.18	0.90	0.3	1.00	304	43.05
	1.30	10.6	2.34	1.38	1.10	0.3	1.20	306	43.05
	1.60	10.6	2.34	1.68	1.25	0.3	1.50	308	43.05
	1.85	10.6	2.34	1.93	1.25	0.3	1.75	310	43.05
02	0.90	17.5	3.50	0.98	0.70	0.3	0.80	312	39.23
	1.10	17.5	3.50	1.18	0.90	0.3	1.00	314	39.23
	1.30	17.5	3.50	1.38	1.10	0.3	1.20	316	39.23
	1.60	17.5	3.50	1.68	1.25	0.3	1.50	318	39.23
	1.85	17.5	3.50	1.93	1.25	0.3	1.75	320	39.23
	2.15	17.5	3.50	2.23	1.75	0.3	2.00	322	39.23
	2.65	17.5	3.50	2.73	1.75	0.3	2.50	324	39.23
	3.15	17.5	3.50	3.23	2.20	0.3	3.00	326	39.23
01	0.90	23.0	4.00	0.98	0.70	0.3	0.80	328	39.23
	1.10	23.0	4.00	1.18	0.90	0.3	1.00	330	39.23
	1.30	23.0	4.00	1.38	1.10	0.3	1.20	332	39.23
	1.60	23.0	4.00	1.68	1.25	0.3	1.50	334	39.23
	1.85	23.0	4.00	1.93	1.25	0.3	1.75	336	39.23
	2.15	23.0	4.00	2.23	1.75	0.3	2.00	338	39.23
	2.65	23.0	4.00	2.73	1.75	0.3	2.50	340	39.23
	3.15	23.0	4.00	3.23	2.20	0.3	3.00	342	39.23

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Milling inserts for circlip grooves with chamfer

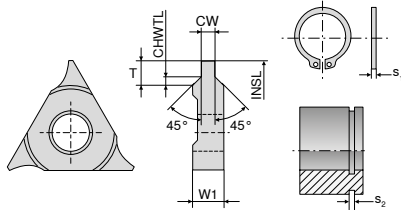

Solid carbide
W2

Size	S ₂ H13 mm	INSL mm	W1 mm	CW _{-0.03} mm	T mm	CHWTL mm	s ₁ mm	Article no. 50 852 ...	£
03	1.10	10.6	2.34	1.18	0.50	0.10	1.00	302	46.07
	1.10	17.5	3.50	1.18	0.50	0.10	1.00	312	40.77
02	1.30	17.5	3.50	1.38	0.85	0.15	1.20	314	40.77
	1.60	17.5	3.50	1.68	1.00	0.15	1.50	316	40.77
	1.85	17.5	3.50	1.93	1.25	0.20	1.75	317	40.77
	2.15	17.5	3.50	2.23	1.50	0.20	2.00	318	40.77
	2.65	17.5	3.50	2.73	1.50	0.20	2.50	319	40.77
	1.10	23.0	4.00	1.18	0.50	0.10	1.00	320	40.77
01	1.30	23.0	4.00	1.38	0.70	0.15	1.20	321	40.77
	1.30	23.0	4.00	1.38	0.85	0.15	1.20	322	40.77
	1.60	23.0	4.00	1.68	1.00	0.15	1.50	324	40.77
	1.60	23.0	4.00	1.68	0.85	0.15	1.50	323	40.77
	1.85	23.0	4.00	1.93	1.25	0.20	1.75	325	40.77
	2.15	23.0	4.00	2.23	1.50	0.20	2.00	326	40.77
	2.65	23.0	4.00	2.73	1.75	0.20	2.50	328	40.77
	2.65	23.0	4.00	2.73	1.50	0.20	2.50	327	40.77
	3.15	23.0	4.00	3.32	1.75	0.20	3.00	329	40.77



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Milling inserts without profile, ground ready-for-use

System 300



Ti500



Size	CW _{+0,02}	INSL	W1	Solid carbide W2	
	mm	mm	mm	Article no. 50 851 ...	£
04	2.00	7.9	2.34	52.02	302
03	2.34	10.6	2.34	43.05	304
	3.00	10.6	3.00	46.07	306
02	3.50	17.5	3.50	39.23	312
	5.00	17.5	5.00	46.07	314
	6.00	17.5	6.00	49.75	316
01	4.00	23.0	4.00	48.37	322 ¹⁾
	6.50	23.0	6.50	48.37	324 ¹⁾



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

1) with circular milling cutter 50 800 090 PDPT = 3.0 mm


→ v_c/f_z Page 70

Milling inserts for chamfering and deburring

System 300



Ti500



Size	PDPT	INSL	W1	Solid carbide W2	
	mm	mm	mm	Article no. 50 857 ...	£
03	1.50	10.6	3.0	43.05	304
02	2.50	17.5	5.0	43.05	314
01	3.25	23.0	6.5	43.05	322 ¹⁾




Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

1) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Partial profile



Ti500



Solid carbide
W2




Article no.
50 855 ...
£
48.37 314
48.37 324

Size	TP mm	INSL mm	W1 mm
02	1-3,5	17.5	3.5
01	1-4,0	23.0	4.0


Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

→ v_c/f_z Page 70

Thread milling insert – Full profile



Ti500



Solid carbide
W2

Article no.
50 859 ...
£
58.72 304
58.72 308
58.72 310

Size	TP mm	INSL mm	W1 mm	PDPT mm
03	1.0	10.6	2.34	0.578
	1.5	10.6	2.34	0.864
	2.0	10.6	2.34	1.159
02	1.0	17.5	3.50	0.578
	1.5	17.5	3.50	0.864
	2.0	17.5	3.50	1.159
	2.5	16.0	3.50	1.444
	2.5	17.5	3.50	1.444
	3.0	17.5	3.50	1.728
01	1.0	23.0	4.00	0.578
	1.5	23.0	4.00	0.864
	2.0	23.0	4.00	1.159
	2.5	23.0	4.00	1.444
	3.0	23.0	4.00	1.728
	3.5	23.0	4.00	2.023
	4.0	23.0	4.00	2.308
	4.5	23.0	6.50	2.602
	5.0	23.0	6.50	2.887
	6.0	23.0	6.50	3.467

58.72 311
58.72 312
58.72 314
81.11 317¹⁾
58.72 316
73.65 318
61.14 320
61.14 322
61.14 324
61.14 326
61.14 328
61.14 330
61.14 332
70.12 334
70.12 336
70.12 338²⁾



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	○

1) M20x2,5 – profile corrected

2) with circular milling cutter 50 800 090 PDPT = 3.0 mm

→ v_c/f_z Page 70

Thread milling insert – Full profile



Solid carbide
W2

Article no.
50 858 ...

Size	TP	TPI	INSL	W1	PDPT		
	mm	1/''	mm	mm	mm	£	
02	1.814	14	17.5	3.5	1.162	58.72	314
	2.309	11	17.5	3.5	1.494	58.72	312
01	2.309	11	23.0	4.0	1.494	61.14	322

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	○


→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

7

Circular milling cutter

▲ size refers to milling inserts

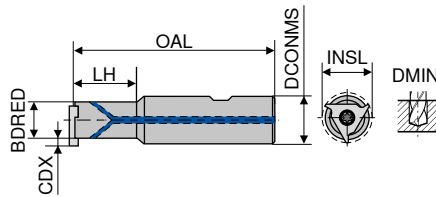

HB W1



Size	INSL	CDX	LH	DCONMS _{h6}	OAL	BDRED	DMIN	torque moment Nm	Article no.	
									50 800 ...	
04	7.9	0.35	17.2	10	57.20	7.1	8	0,9	£ 145.26	015 ¹⁾
03	10.6	1.60	17.2	10	57.20	7.4	11	0,9	£ 149.29	020 ¹⁾
	10.6	1.60	34.2	10	74.20	7.4	11	0,9	£ 322.35	025 ²⁾
02	17.5	2.60	28.7	12	74.05	12.0	20	3,8	£ 159.10	030
	17.5	2.60	63.7	12	108.70	12.0	20	3,8	£ 340.89	045 ²⁾
01	23.0	3.45	38.5	16	87.00	16.1	25	5,5	£ 167.13	050
	23.0	3.45	67.5	16	116.00	16.1	25	5,5	£ 167.07	070
	23.0	3.00	88.5	16	137.00	17.0	25	5,5	£ 359.29	090 ²⁾

- 1) without through coolant
- 2) carbide version

Spare parts

for Article no.








		Article no. 80 950 ...		Article no. 70 960 ...	
		£		£	
50 800 050	T20 - IP	16.56	129	5.70	234
50 800 070	T20 - IP	16.56	129	5.70	234
50 800 090	T20 - IP	16.56	129	5.70	234
50 800 030	T15 - IP	15.77	128	5.70	233
50 800 045	T15 - IP	15.77	128	5.70	233
50 800 020	T06 - IP	13.68	123	3.79	232
50 800 025	T06 - IP	13.68	123	3.79	232
50 800 015	T06 - IP	13.68	123	3.79	232



i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{im} is used. Details on → **Page 72+73.**

Thread milling insert

▲ can be used on both sides (except for INSL 10.4)



INSL	TP	Solid carbide W2		Solid carbide W2		Solid carbide W2		Solid carbide W2	
		Article no.	£	Article no.	£	Article no.	£	Article no.	£
10.4	0.50	50 890 ...	83.83	50 890 ...		50 891 ...		50 891 ...	
	0.75		100						
	1.00		101	86.14	302				
	1.25		102						
	1.50		103	86.14	304				
11.0	0.50		104						
	0.75		120						
	1.00		121	75.25	322				
	1.25		122						
	1.50		123	74.11	324				
16.0	0.50		124						
	0.75		140						
	1.00		141	93.13	342	68.13	142	88.03	342
	1.25		142			68.13	143		
	1.50		143	88.03	344	68.13	144	88.03	344
	1.75		144			68.13	145		
	2.00		145	88.03	346	68.13	146	88.03	346
27.0	1.00		146						
	1.25		162	160.51	362	130.03	162	160.51	362
	1.50		163			130.03	163		
	1.75		164	160.51	364	130.03	164	160.51	364
	2.00		165			130.03	166	160.51	366
	2.50		166	160.51	366	130.03	167		
	3.00		167			130.03	168	160.51	368
	3.50		168	160.51	368	130.03	169		
4.00		169			130.03	170			


Steel	•	•	•	•
Stainless steel				
Cast iron	•	•	•	•
Non ferrous metals	•	•	•	•
Heat resistant alloys				
Hardened materials				

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

▲ can be used on both sides (except for INSL 10.4)

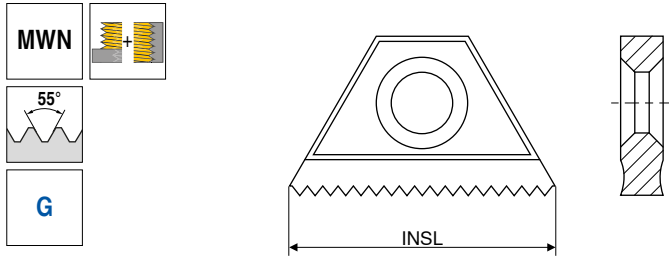


INSL	TPI	TP
mm	1/''	mm
10.4	19	1.337
16.0	14	1.814
	11	2.309
27.0	11	2.309

	Solid carbide W2	Solid carbide W2
	Article no. 50 895 ...	Article no. 50 895 ...
	£	£
Steel	66.83 100	86.14 300
Stainless steel		
Cast iron	68.13 142	86.14 342
Non ferrous metals	68.13 144	86.14 344
Heat resistant alloys	130.03 166	196.11 366
Hardened materials		

→ v_c/f_z Page 69

Thread milling insert

▲ can be used on both sides (except for INSL 10.4)

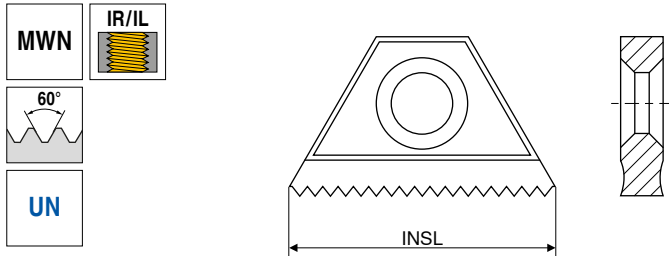

INSL	TPI	TP
mm	1/''	mm
10.4	20	1.270
	18	1.411
16.0	16	1.588
	12	2.117
27.0	12	2.117
	8	3.175



	Solid carbide W2
	Article no. 50 892 ...
	£
Steel	66.83 100
Stainless steel	66.83 102
Cast iron	
Non ferrous metals	68.13 144
Heat resistant alloys	68.13 146
Hardened materials	130.03 166
	130.03 168

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_m is used. Details on → Page 72+73.

Thread milling insert

▲ double sided

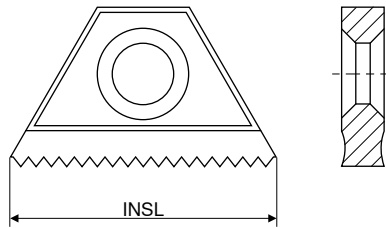

Solid carbide
W2



INSL	TPI	TP	Article no.	
mm	1/"	mm	50 896 ...	£
11	18	1.411		69.90
				122
16	18	1.411		81.80
	16	1.588		66.81
				142
				144

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 69

Thread milling insert

▲ double sided

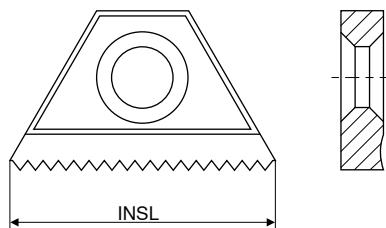

Solid carbide
W2

INSL	TPI	TP	Article no.	
mm	1/"	mm	50 897 ...	£
16	14.0	1.814		68.13
	11.5	2.209		68.13
27	11.5	2.209		130.03
	8.0	3.175		130.03
				142
				144
				164
				166

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•


→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

i Note! Thread milling inserts are marked R (right-hand thread) and L (left-hand thread). The standard tool holder cannot be used to produce a left-hand thread! Tool holder for left-hand thread available on special request.

Circular milling cutter

▲ INSL refers to milling inserts

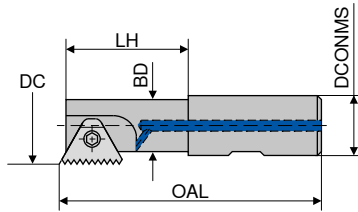


B W1

INSL	BD	LH	DCONMS _{h6}	OAL	DC	torque moment Nm	Article no. 50 843 ...
mm	mm	mm	mm	mm	mm	£	
10.4	6.8	12	12	69	9.0	0,9	205.23 101
	6.8	17	20	84	9.0	0,9	210.64 102
11.0	8.9	12	12	70	11.5	1,2	205.23 111
	8.9	20	20	85	11.5	1,2	210.64 112
16.0	13.6	22	16	90	17.0	2,5	231.04 161
	16.6	43	20	95	20.0	2,5	231.04 162
	18.6	25	25	125	22.0	2,5	288.64 163
27.0	24.0	52	25	110	30.0	9,0	292.62 271
	31.0	58	32	120	37.0	9,0	324.63 273
	24.0	92	25	150	30.0	9,0	348.01 272
	31.0	98	32	160	37.0	9,0	399.63 274

Pilot hole diameter for circular end mill 50 843 ...

BD	TP in mm									
	0.5 mm 48 G/"	0.75 mm 32 G/"	1.0 mm 24 G/"	1.25 mm 20 G/"	1.5 mm 16 G/"	2.0 mm 12 G/"	2.5 mm 10 G/"	3.0 mm 8 G/"	3.5 mm 7 G/"	4.0 mm 6 G/"
6.8	9.5	10	10.7	11.4	12					
8.9	12	12.5	13.2	13.9	14.5					
13.6	17.6	18.2	19	19.6	20	21				
16.6	20.7	21.4	22	22.6	23	24				
18.6	22.7	23.4	24	24.6	25	26				
24.0	30.7	31.4	32	32.8	33.5	34.6	36.6	39	42	45
31.0	38	38.6	39.5	40.4	41	42	44	46.5	49	52



Key D




Clamping screw

Spare parts INSL	Article no. 80 950 ...	£	109	Article no. 70 950 ...	£	200	
							T07
10.4		10.30	109		1.71	200	
11		10.30	110		1.71	201	
16		12.05	112		1.71	202	
27		13.49	115		2.65	203	

Circular milling cutter NPT



▲ INSL refers to milling inserts

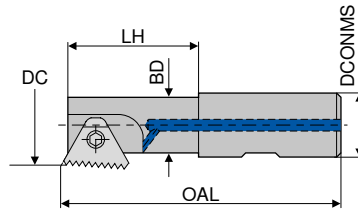

B W1

INSL	BD	Thread	LH	DCONMS _{h6}	OAL	DC	torque moment	Article no.
mm	mm		mm	mm	mm	mm	Nm	50 844 ...
16	12.5	NPT 1/2	22	16	90	15.5	2,5	£ 210.64 161
	15.0	NPT 3/4 - 1 1/4	23	20	85	19.0	2,5	£ 231.04 162
27	24.0	NPT 1 1/2 - 2	52	25	110	30.0	9,0	£ 292.62 271
	31.0	NPT > 2	58	32	120	37.0	9,0	£ 324.63 272

7






Spare parts
INSL

INSL	Article no.	Price	QTY	Part	Article no.	Price	QTY
16	80 950 ...	£ 12.05	112	T10	70 950 ...	£ 1.71	202
27	80 950 ...	£ 13.49	115	T25	70 950 ...	£ 2.65	203

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Thread milling insert

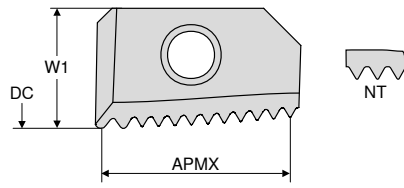



Solid carbide
W2

DC	TP	W1	APMX	NT	Article no.	£
12	1.0	7.5	12.0	13	50 863 ...	56.45 300
	1.5	7.5	10.5	8		56.45 302
17	1.0	11.0	16.0	17		56.45 310
	1.5	11.0	16.5	12		56.45 312
	2.0	11.0	16.0	9		56.45 314
20	1.0	7.5	12.0	13		56.45 320
	1.5	7.5	10.5	8		56.45 322
25	1.0	11.0	16.0	17		56.45 330
	1.5	11.0	16.5	12		56.45 332
	2.0	11.0	16.0	9		56.45 334

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•

→ v_c/f_z Page 70

Thread milling insert

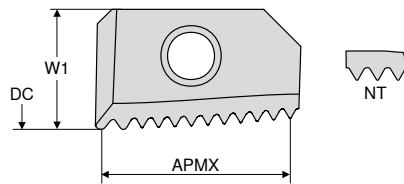

Solid carbide
W2


DC	TPI	W1	APMX	NT	Article no.	£
12	14	7.5	9.07	6	50 864 ...	56.45 300
17	14	11.0	16.33	10		73.65 312 ¹⁾
	14	11.0	16.33	10		73.65 314 ²⁾
	11	11.0	16.16	8		73.65 310
25	14	11.0	16.33	10		73.65 332
	11	11.0	16.16	8		73.65 330

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•

1) Thread: 5/8 - 3/4 - 7/8
2) 1/2" Profile corrected



→ v_c/f_z Page 70

Circular milling cutter

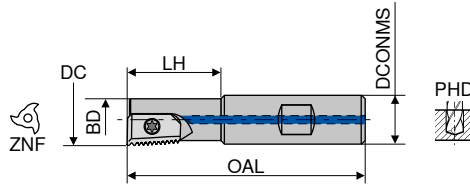

DC	LH	DCONMS _{h6}	OAL	BD	ZNF	PHD	torque moment	W1
mm	mm	mm	mm	mm		mm	Nm	Article no.
12	18	16	74.0	9.4	1	14	1,1	50 842 ...
								£ 173.49 121
17	30	16	79.0	13.7	1	19	3,8	191.63 171
20	32	20	83.0	17.5	3	22	1,1	230.40 201
25	50	25	107.6	21.7	3	26	3,8	285.46 251
	85	25	142.6	21.7	3	26	3,8	812.32 252 ¹⁾

1) heavy metal version with mounted head







Spare parts

for Article no.

Article no.	Article no.	Article no.	Article no.
£	80 950 ...	£	70 960 ...
50 842 121	T08 - IP 13.49 125	M2,5x6,5	3.79 244
50 842 171	T15 - IP 15.77 128	M4x7,5	3.79 245
50 842 201	T08 - IP 13.49 125	M2,5x6,5	3.79 244
50 842 251	T15 - IP 15.77 128	M4x7,5	3.79 245
50 842 252	T15 - IP 15.77 128	M4x7,5	3.79 245

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

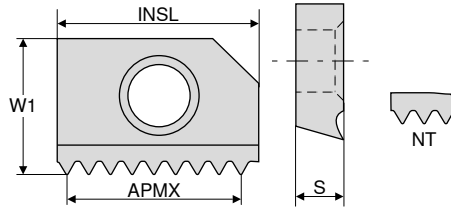



INSL mm	TP mm	W1 mm	APMX mm	S mm	NT	Solid carbide			
						W2 Article no. 50 887 ... £	W2 Article no. 50 885 ... £		
14.5	0.50	10.0	13.50	3.18	28			89.77	350
	0.75	10.0	13.50	3.18	19			89.77	352
	1.00	10.0	13.00	3.18	14	67.70	304	52.02	354
	1.25	10.0	12.50	3.18	11			67.70	356
	1.50	10.0	12.00	3.18	9	67.70	308	52.02	358
	1.75	10.0	12.25	3.18	8			67.70	360
	2.00	10.0	12.00	3.18	7	67.70	312	52.02	362
	2.50	10.0	10.00	3.18	5			61.14	364
	2.50	10.0	10.00	3.18	5			61.14	366 ¹⁾
15.0	3.00	10.5	12.00	3.18	5			73.65	370
	3.50	10.5	10.50	3.18	4			73.65	372
21.0	1.00	10.0	19.00	3.18	20			58.72	380
	1.50	10.0	19.50	3.18	14			58.72	382
	1.50	10.0	18.00	3.18	13	67.70	320		
	2.00	10.0	18.00	3.18	10			58.72	384
26.0	1.50	15.0	24.00	5.00	17			101.39	390
	2.00	15.0	24.00	5.00	13			101.39	392
	3.00	15.0	21.00	5.00	8			101.39	396
	3.50	15.0	20.00	5.00	7			149.33	398
	4.00	15.0	20.00	5.00	6			149.33	400

Steel	•	•
Stainless steel	•	•
Cast iron	•	•
Non ferrous metals	•	•
Heat resistant alloys		
Hardened materials		

1) M20x2,5 - profile corrected

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert


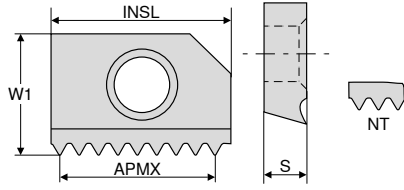



INSL	TPI	TP	W1	APMX	S	NT	Article no.	Price
mm	1/''	mm	mm	mm	mm		50 888 ...	£
14.5	18	1.411	10	11.28	3.18	9		78.02
	16	1.587	10	11.11	3.18	8		78.02
	14	1.814	10	12.69	3.18	8		56.45
	12	2.116	10	10.58	3.18	6		78.02
	11	2.309	10	11.54	3.18	6		56.45
21.0	14	1.814	10	18.14	3.18	11		67.70
	11	2.309	10	18.47	3.18	9		67.70
26.0	11	2.309	15	23.09	5.00	11		110.56

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 70

Thread milling insert

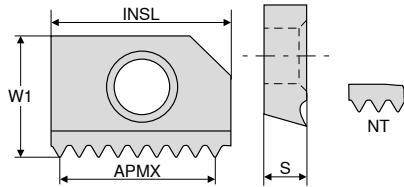



INSL	TPI	TP	W1	APMX	S	NT	Article no.	Price
mm	1/''	mm	mm	mm	mm		50 894 ...	£
14.5	18	1.411	10	12.69	3.18	10		82.96
	16	1.587	10	11.11	3.18	8		82.96

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert

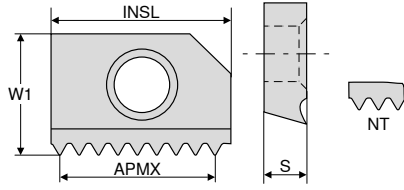

Solid carbide
W2

INSL	TPI	TP	W1	APMX	S	NT	Article no.	£
14.5	18	1.411	10	12.69	3.18	10	50 889 ...	81.13
	16	1.587	10	12.70	3.18	9	50 889 ...	85.13
21.0	16	1.587	10	19.05	3.18	13	50 889 ...	101.45
	14	1.814	10	18.14	3.18	11	50 889 ...	101.45
	12	2.116	10	18.04	3.18	10	50 889 ...	101.45


Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Circular milling cutter



▲ INSL refers to milling inserts

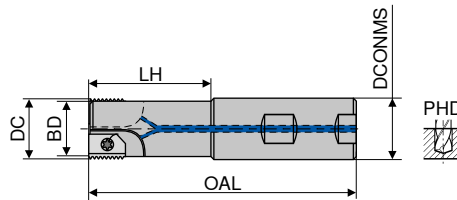

B W1

INSL	DC	LH	DCONMS ₀₆	OAL	BD	ZNP	PHD	torque moment	Article no.
mm	mm	mm	mm	mm	mm		mm	Nm	50 841 ...
14.5	16	30.0	16	78	12.7	1	18.5	3,8	160.15 016
	16	50.0	16	98	12.7	1	18.5	3,8	252.92 017 ¹⁾
	20	60.0	20	110	16.8	1	23.0	3,8	193.78 020
	25	48.2	25	106	21.5	2	30.0	3,8	279.41 025
	25	92.2	25	150	21.5	2	30.0	3,8	572.78 026 ¹⁾
15.0	22	30.0	16	79	12.7	1	20.0	3,8	188.55 218
	27	48.2	25	106	21.5	2	32.0	3,8	309.70 227
	27	60.0	20	110	16.8	1	26.0	3,8	208.18 222
21.0	16	31.3	20	85	12.7	1	18.5	3,8	179.11 316
	22	32.8	25	92	18.7	1	26.0	3,8	184.06 322
	22	62.8	25	122	18.7	1	26.0	3,8	591.71 323 ¹⁾
	28	38.3	32	102	24.7	2	35.0	3,8	353.00 328
	28	78.3	32	142	24.5	2	35.0	3,8	1,402.69 327 ¹⁾
26.0	18	48.5	25	107	20.0	1	30.0	3,8	223.62 125



1) heavy metal version



Spare parts	Article no.	Article no.
for Article no.	80 950 ...	70 960 ...
	£	£
50 841 016	T15 - IP 15.77 128	M4x6,9 5.70 237
50 841 017	T15 - IP 15.77 128	M4x6,9 5.70 237
50 841 020	T15 - IP 15.77 128	M4x7,5 3.79 245
50 841 025	T15 - IP 15.77 128	M4x8 5.70 242
50 841 026	T15 - IP 15.77 128	M4x8 5.70 242
50 841 218	T15 - IP 15.77 128	M4x6,9 5.70 237
50 841 227	T15 - IP 15.77 128	M4x8 5.70 242
50 841 222	T15 - IP 15.77 128	M4x6,9 5.70 237
50 841 316	T15 - IP 15.77 128	M4x6,9 5.70 237
50 841 322	T15 - IP 15.77 128	M4x6,9 5.70 237
50 841 323	T15 - IP 15.77 128	M4x8 5.70 242
50 841 328	T15 - IP 15.77 128	M4x8 5.70 242
50 841 327	T15 - IP 15.77 128	M4x8 5.70 242
50 841 125	T15 - IP 15.77 128	M4x11,5 5.70 241


i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread milling insert – Partial profile

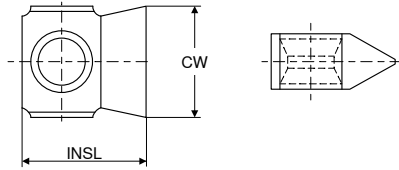

Solid carbide
W2
Article no.
50 867 ...
£
72.50 115
72.50 225




DC	TP	TPI	CW	INSL
mm	mm	1/''	mm	mm
16,5	1,5 - 3,0	16 - 10	5	7.0
18	2,5 - 3,5	10 - 7	5	7.8



DC	TP	TPI	CW	INSL
mm	mm	1/''	mm	mm
16,5	1.814	14	5	7


W2
Article no.
50 868 ...
£
88.77 114

Thread milling insert – Partial profile

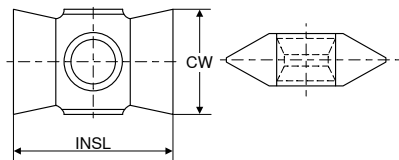

Solid carbide
W2
Article no.
50 860 ...
£
55.36 315
55.36 325
61.58 415
61.58 425

DC	TP	TPI	CW	INSL
mm	mm	1/''	mm	mm
23,85	1,5 - 2,5	16 - 10	6.35	9.52
23,85	2,5 - 4,0	10 - 6	6.35	9.52
32,85	1,5 - 2,5	16 - 10	8.50	13.50
32,85	2,5 - 5,5	10 - 4,5	8.50	13.50





DC	TP	TPI	CW	INSL
mm	mm	1/''	mm	mm
23,85	2.309	11	6.35	9.52
32,85	2.309	11	8.50	13.50

W2
Article no.
50 861 ...
£
61.58 311
71.10 411

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

Circular milling cutter

Scope of supply:
including key

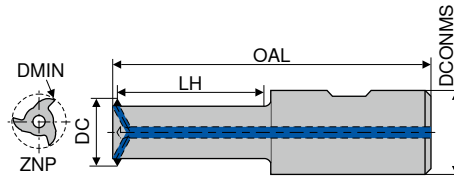

W1

Article no.
50 848 ...


DC	DMIN	TP	TPI	LH	DCONMS _{ns}	OAL	ZNP	torque moment	
mm	mm	mm	1/''	mm	mm	mm		Nm	
16,5 / 18,0	17,5 / 19,0	1,5 - 3,0	16 - 10	60	20	114	2	0,9	438.71 020
23,85	25,5	1,5 - 4,0	24 - 6	90	32	154	3	0,9	517.15 030
32,85	35,0	1,5 - 5,5	16 - 4,5	115	32	179	3	2,5	536.76 040

7

Spare parts

for Article no.

for Article no.		Article no. 80 950 ...	Article no. 70 950 ...
		£	£
50 848 020	T07 - IP	13.49 124	M2,5x8,5 9.47 739
50 848 030	T07 - IP	13.49 124	M2,5x8,5 9.47 739
50 848 040	T09 - IP	14.77 126	M3x11 9.47 740



Key D



Clamping screw


i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Thread milling insert – Partial profile


EWM



M UN

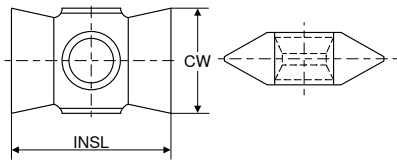

TiN



Solid carbide
W2

Article no.
50 870 ...

DC	TP	TPI	CW	INSL	£	
mm	mm	1/''	mm	mm		
40,25	1,5 - 3,0	16 - 9	9.5	15.50	70.89	515
40,25	3,0 - 6,0	9 - 4	9.5	15.50	70.89	530
52,55 / 66,55	1,5 - 3,0	16 - 9	12.5	19.00	76.81	615
52,55 / 66,55	3,0 - 6,0	9 - 4	12.5	19.00	76.81	630
92	6,0 - 8,0	4	14.3	28.58	125.52	760



G

W2

Article no.
50 871 ...

DC	TP	TPI	CW	INSL	£	
mm	mm	1/''	mm	mm		
40,25	2.309	11	9.5	15.5	81.07	511
52,55	2.309	11	12.5	19.0	94.36	611

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	●


→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Circular milling cutter

Scope of supply:

including key

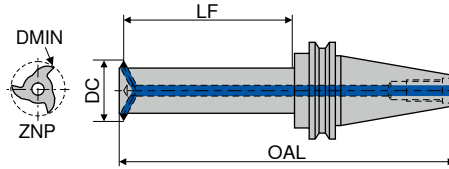

DIN 69871

W1



Article no.
50 849 ...

DC	DMIN	TP	TPI	LF	OAL	Adapter	ZNP	torque moment		
mm	mm	mm	1/''	mm	mm			Nm	£	
40.25	43.0	1,5 - 6,0	16 - 4,0	145	280.5	SK 50	4	5,5	1,116.21	148
40.25	43.0	1,5 - 6,0	16 - 4,0	145	247.0	SK 40	4	5,5	1,077.13	048
52.55	56.0	1,5 - 6,0	16 - 4,0	195	279.6	SK 40	4	8,0	1,233.86	064
52.55	56.0	1,5 - 6,0	16 - 4,0	195	331.0	SK 50	4	8,0	1,272.96	164
66.55	70.5	1,5 - 6,0	16 - 4,0	260	398.0	SK 50	7	8,0	1,723.12	080
92.00	100.0	6,0 - 8,0	4,0	360	497.0	SK 50	7	8,0	2,036.45	115

7


Spare parts

DC	Article no.	£	Article no.	£
40.25	T15 - IP	15.77 128	M4x13	9.47 741
52.55	T20 - IP	16.56 129	M5x15	9.47 742
66.55	T20 - IP	16.56 129	M5x15	9.47 742
92	T20 - IP	16.56 129	M5x15	9.47 742



i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

MicroMill – Solid Carbide Circular End Milling Cutter

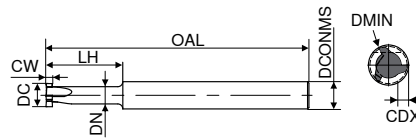

HA

Solid carbide
W1


Article no.
53 050 ...

DC	CW _{±0,02}	CDX	LH	OAL	DN	DCONMS _{h6}	ZFP	DMIN	
mm	mm	mm	mm	mm	mm	mm		mm	
5.8	0.7	0.8	15.2	58	3.8	6	3	6	60.86 070
	0.8	0.8	15.2	58	3.8	6	3	6	60.86 080
	0.9	0.8	15.2	58	3.8	6	3	6	60.86 090
	1.0	0.8	15.2	58	3.8	6	3	6	60.86 100
	1.5	0.8	15.2	58	3.8	6	3	6	60.86 150
7.8	0.7	1.2	25.4	68	5.0	8	3	8	76.78 170
	0.8	1.2	25.4	68	5.0	8	3	8	76.78 180
	0.9	1.2	25.4	68	5.0	8	3	8	76.78 190
	1.0	1.2	25.4	68	5.0	8	3	8	76.78 200
	1.5	1.2	25.4	68	5.0	8	3	8	76.78 250
	2.0	1.2	25.4	68	5.0	8	3	8	76.78 300

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 71

MicroMill – Solid Carbide Circular End Milling Cutter

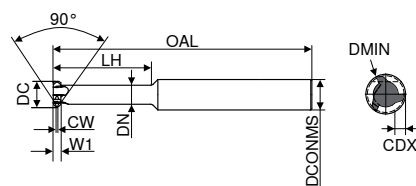

HA

Solid carbide
W1



Article no.
53 051 ...

DC	W1	CW	CDX	LH	OAL	DN	DCONMS _{h6}	ZFP	DMIN	
mm	mm	mm	mm	mm	mm	mm	mm		mm	
5.8	2	0.2	0.8	15	58	4.2	6	3	6	58.70 010
	2	0.2	0.8	25	68	4.2	6	3	6	74.51 020
7.8	2	0.2	1.2	25	68	5.0	8	3	8	90.45 110
	2	0.2	1.2	35	78	5.0	8	3	8	95.23 120

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 71

MicroMill – Solid Carbide Circular Thread Milling Cutter – Full profile

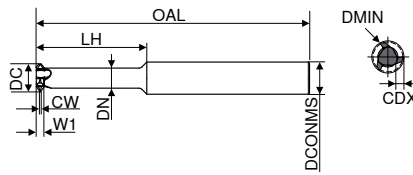

CWX500



HA



Solid carbide
W1

Thread	TP	DC	W1	CW	CDX	LH	OAL	DN	DCONMS _{h6}	ZEPF	DMIN	Article no.	£	
	mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	53 052 ...		
M1,6	0.35	1.18	0.40	0.04	0.19	4.0	32	0.64	3	3	1.38	71.51	160	
M1,8	0.35	1.38	0.50	0.04	0.19	5.0	32	0.70	3	3	1.58	70.68	180	
M2	0.40	1.50	0.56	0.05	0.22	5.0	32	0.90	3	4	1.70	78.71	200	
M2,5	0.45	1.95	0.60	0.06	0.25	6.0	32	1.15	3	4	2.15	77.85	250	
M3	0.50	2.40	0.60	0.06	0.27	7.0	32	1.60	3	4	2.60	77.15	300	
M3,5	0.60	2.80	0.74	0.08	0.33	8.0	32	1.80	3	4	3.00	75.46	350	
M4	0.70	3.10	0.82	0.09	0.38	9.0	44	1.98	5	4	3.30	81.94	400	
M5	0.80	3.60	0.98	0.10	0.43	10.0	44	2.20	5	4	3.80	79.54	500	
M6	1.00	4.10	0.98	0.13	0.54	12.2	44	2.70	5	4	4.30	77.85	600	

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 71

MicroMill – Solid Carbide Circular Thread Milling Cutter – Partial profile

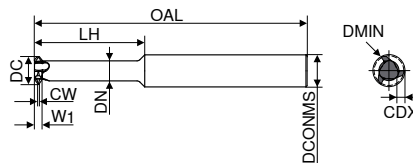

CWX500



HA

Solid carbide
W1



TP	DC	W1	CW	CDX	LH	OAL	DN	DCONMS _{h6}	ZEPF	DMIN	Article no.	£	
mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	53 053 ...		
0,5 - 1,5	5.8	2	0.06	0.91	15.2	58	3.5	6	3	6	63.50	010	
0,5 - 1,5	7.8	2	0.06	0.91	25.4	68	5.5	8	3	8	84.09	110	
1,0 - 2,0	7.8	2	0.12	1.19	25.4	68	5.0	8	3	8	84.09	120	

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{im} is used. Details on → Page 72+73.

Circular Thread Milling Cutter

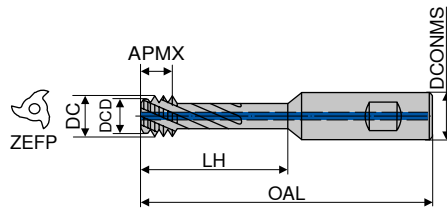

OSM



HB Solid carbide
W1



Article no.	50 815 ...
£	
	374.79 060
	440.86 080
	424.18 100
	476.76 120

DC	Thread	TP	APMX	LH	DCONMS _{h6}	DCD	OAL	ZEFP
mm		mm	mm	mm	mm	mm	mm	
4.51	M6x1 - M7x1	1.00	4.1	16	8	3.41	60	3
6.23	M8x1,25 - M9x1,25	1.25	5.1	21	10	4.91	71	4
7.75	M10x1,5 - M11x1,5	1.50	6.0	26	10	6.11	76	4
9.16	M12x1,75	1.75	7.0	31	12	7.21	86	4

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 68

Circular Thread Milling Cutter

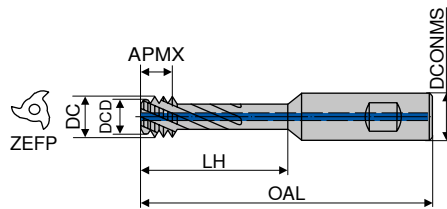

OSM



HB Solid carbide
W1

Article no.	50 821 ...
£	
	545.76 060
	598.34 080
	604.89 100
	650.94 120
	693.62 140
	854.73 180



DC	Thread	TP	APMX	LH	DCONMS _{h6}	DCD	OAL	ZEFP
mm		mm	mm	mm	mm	mm	mm	
4.51	M6x1 - M7x1	1.00	4.1	23	8	3.41	65	3
6.23	M8x1,25 - M9x1,25	1.25	5.1	30	10	4.91	80	4
7.75	M10x1,5 - M11x1,5	1.50	6.0	37	10	6.11	85	4
9.16	M12x1,75	1.75	7.0	43	12	7.21	100	4
11.08	M14x2 - M16x2	2.00	8.1	57	16	8.91	113	4
14.38	M18x2,5 - M20x2,5	2.50	10.0	71	20	11.71	129	5

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	○
Hardened materials	○

→ v_c/f_z Page 68

Circular Thread Milling Cutter

▲ note: left-hand cutting (M04)

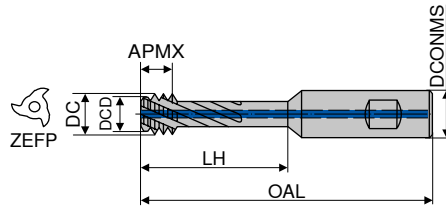

TiCN

HB

Solid carbide

NEW W1

Article no.
50 840 ...

£	
146.73	030 ¹⁾
146.92	040 ¹⁾
145.60	050 ¹⁾
145.50	060 ¹⁾
156.84	080
168.93	100
179.61	120
196.33	140

DC	Thread	TP	APMX	LH	DCONMS _{ns}	DCD	OAL	ZIEFF
mm		mm	mm	mm	mm	mm	mm	
2.3	M3x0,5	0.50	2.0	7.0	6	2.10	51	4
3.0	M4x0,7	0.70	2.8	9.4	6	2.60	51	4
3.8	M5x0,8	0.80	3.2	11.6	6	3.40	51	4
4.6	M6x1 - M7x1	1.00	4.0	14.0	8	4.10	60	4
6.2	M8x1,25 - M10x1,25	1.25	5.0	19.0	10	5.60	71	4
7.8	M10x1,5 - M12x1,5	1.50	6.0	25.0	10	7.00	76	4
9.2	M12x1,75	1.75	7.0	31.0	12	8.30	86	4
11.1	M14x2 - M16x2	2.00	8.0	36.0	16	10.04	98	4

Steel	
Stainless steel	
Cast iron	
Non ferrous metals	
Heat resistant alloys	○
Hardened materials	●

1) without through coolant



→ v_c/f_z Page 68

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → Page 72+73.

i Caution: left-hand cutting (M04) → spindle rotation left!

Thread Milling Cutter

▲ available on request: M1 / M1,1 / M1,2 / M1,4 / M1,6 / M1,7 / M1,8 / M2 / M2,2 / M2,3 / M2,5 / M2,6 / M3

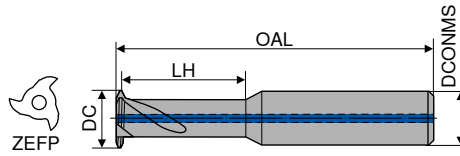



OSM		OSM	
Solid carbide W1		Solid carbide W1	
Article no. 50 846 ...		Article no. 50 847 ...	
£		£	
329.04	040	333.11	040
329.04	050	333.11	050
337.02	060	340.80	060
376.25	080	380.00	080
380.00	100	383.95	100
427.09	120	431.02	120

DC	Thread	TP	LH	DCONMS _{h6}	OAL	ZEPF
mm		mm	mm	mm	mm	
3.15	M4	0.70	9	6	55	3
4.00	M5	0.80	11	6	55	3
4.80	M6 - M7	1.00	16	8	60	3
6.40	M8 - M9	1.25	22	10	71	4
8.00	M10 - M12	1.50	26	10	76	4
9.60	M12	1.75	27	12	86	4

Steel	●	●
Stainless steel	●	●
Cast iron		
Non ferrous metals	●	●
Heat resistant alloys	●	●
Hardened materials	●	●

→ v_c/f_z Page 68


Thread Milling Cutter with Chamfer Facet

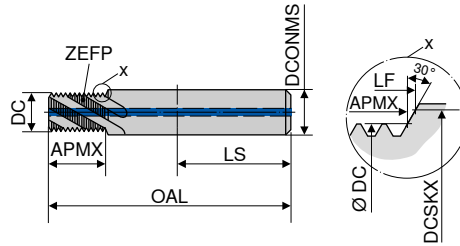

TiAlN
HA
Solid carbide
W1
Article no. 50 811 ...
£
277.17 050
291.69 060
320.66 080
320.34 100 ¹⁾
493.16 120
585.27 160 ²⁾


DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEPF
mm		mm	mm	mm	mm	mm	mm	mm	
4.0	M5	0.80	62	11	36	8	5.3	11.16	3
4.7	M6	1.00	62	13	36	8	6.3	13.93	3
6.5	M8	1.25	74	18	40	10	8.3	18.62	3
8.0	M10	1.50	74	22	40	10			3
10.0	M12	1.75	90	26	45	14	12.3	26.47	4
12.5	M16	2.00	100	35	48	16			4

- 1) without chamfer
- 2) chamfer section at the front of the tool



DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEPF
mm		mm	mm	mm	mm	mm	mm	mm	
6.5	M8x1	1.00	74	18	40	10	8.3	18.00	3
8.0	M10x1	1.00	74	22	40	10			3
8.0	M10x1,25	1.25	74	22	40	10			3
10.0	M12x1,25	1.25	90	26	45	14	12.3	26.61	4
10.0	M12x1,5	1.50	90	26	45	14	12.3	27.30	4
11.0	M14x1	1.00	100	31	48	16	14.3	32.70	4
11.0	M14x1,5	1.50	100	31	48	16	14.3	32.08	4
12.5	M16x1,5	1.50	100	35	48	16			4

- 1) without chamfer
- 2) chamfer section at the front of the tool



DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEPF
mm		mm	mm	mm	mm	mm	mm	mm	
7.6	G 1/8-28	0.907	80	20	45	12	10.0	20.97	3
11.0	G 1/4-19	1.337	100	27	48	16	13.5	28.39	4
13.0	G 3/8-19	1.337	100	34	48	16			4
16.0	G1/2-14	1.814	110	44	50	20			5



Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
hardened materials	•

- 1) chamfer section at the front of the tool


→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.


Thread Milling Cutter with Chamfer Facet

SFSE  IR/IL 

≤ 2xD

60° 


UNC

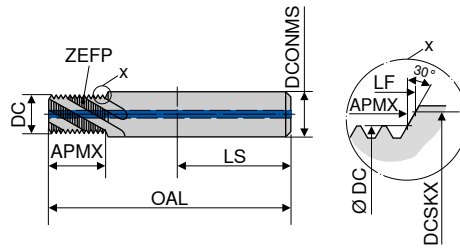

HA  Solid carbide W1


DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no.	Price	Code
mm		mm	mm	mm	mm	mm	mm	mm		50 823 ...	£	
4.7	UNC 1/4-20	1.270	62	14	36	8	6.65	15.14	3		291.69	014
6.1	UNC 5/16-18	1.411	74	17	40	10	8.25	18.23	3		364.39	516
7.6	UNC 3/8-16	1.588	80	21	45	12	9.83	22.05	3		437.24	038
8.8	UNC 7/16-14	1.814	90	24	45	14	11.43	25.21	3		542.57	716
10.1	UNC 1/2-13	1.954	90	26	45	14	13.00	27.67	4		542.57	012
11.4	UNC 9/16-12	2.117	100	31	48	16	14.61	32.15	4		650.94	916
12.7	UNC 5/8-11	2.309	100	34	48	16	16		4		650.94	058 ¹⁾
15.2	UNC 3/4-10	2.540	110	42	50	20	19.35	43.74	5		920.54	034

1) chamfer section at the front of the tool

60°  UNF

DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	DCSKX	LF	ZEFP	Article no.	Price	Code
mm		mm	mm	mm	mm	mm	mm	mm		50 824 ...	£	
4.7	UNF 1/4-28	0.907	62	14	36	8	6.65	15.59	3		301.79	014
6.1	UNF 5/16-24	1.058	74	17	40	10	8.25	18.05	3		357.93	516
7.6	UNF 3/8-24	1.058	80	21	45	12	9.83	22.30	3		437.24	038
8.8	UNF 7/16-20	1.270	90	24	45	14	11.43	25.49	3		542.57	716
10.1	UNF 1/2-20	1.270	90	26	45	14	13.00	28.46	4		542.57	012
11.4	UNF 9/16-18	1.411	100	31	48	16	14.61	33.03	4		650.94	916
12.7	UNF 5/8-18	1.411	100	34	48	16	16		4		670.65	058 ¹⁾
15.2	UNF 3/4-16	1.588	110	42	50	20	19.35	43.69	5		920.54	034

1) chamfer section at the front of the tool

60°  NPT

DC	Thread	TP	OAL	APMX	LS	DCONMS _{h6}	ZEFP	Article no.	Price	Code
mm		mm	mm	mm	mm	mm		50 819 ...	£	
5.8	NPT 1/16-27	0.941	62	10	36	8	3		373.29	116 ¹⁾
7.6	NPT 1/8-27	0.941	74	10	40	10	3		423.86	018 ¹⁾
10.1	NPT 1/4-18	1.411	90	15	45	14	3		621.43	014 ¹⁾
16.0	NPT 1/2-14	1.814	110	19	50	20	5		1,068.41	012 ¹⁾

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	●



1) without chamfer

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter with Chamfer Facet

- ▲ profile-corrected
- ▲ hard machining to Ø DC = 4 mm possible
- ▲ chamfer section at end of shank

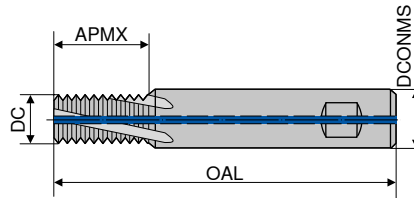

Ti500




HB Solid carbide
W8

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP
mm		mm	mm	mm	mm	
4.00	M5	0.80	11	8	62	3
4.80	M6	1.00	13	8	62	3
6.50	M8	1.25	18	10	74	3
7.95	M10	1.50	22	12	80	3
9.90	M12	1.75	26	14	90	4
11.60	M14	2.00	31	16	100	4
11.95	M16	2.00	35	12	90	4
13.95	M18	2.50	39	20	110	4
15.95	M20	2.50	44	16	100	4

Article no.	£	
54 801 ...		
	133.93	050 ¹⁾
	133.93	060 ¹⁾
	157.44	080
	186.78	100
	239.63	120
	274.92	140
	186.78	160 ²⁾
	387.52	180
	274.92	200 ²⁾


- 1) without through coolant
- 2) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP
mm		mm	mm	mm	mm	
6.0	M8x1	1.00	18	10	74	3
8.0	M10x1	1.00	22	12	80	3
8.0	M10x1,25	1.25	22	12	80	3
9.9	M12x1	1.00	26	14	90	4
9.9	M12x1,25	1.25	26	14	90	4
9.9	M12x1,5	1.50	26	14	90	4
11.6	M14x1	1.00	31	16	100	4
11.6	M14x1,5	1.50	31	16	100	4
12.0	M16x1,5	1.50	35	12	90	4
14.0	M18x1,5	1.50	39	20	110	4
16.0	M20x1,5	1.50	44	16	100	4

Article no.	£	
54 803 ...		
	157.44	080
	186.78	100
	186.78	101
	239.63	120
	239.63	121
	239.63	122
	274.92	140
	284.16	141
	186.78	160 ¹⁾
	396.93	180
	239.63	200 ¹⁾

- 1) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP
mm		mm	mm	mm	mm	
6.00	G 1/16-28	0.907	16	10	74	3
7.95	G 1/8-28	0.907	20	12	80	3
9.90	G 1/4-19	1.337	27	16	100	4
13.95	G 3/8-19	1.337	34	14	90	4
15.95	G 1/2-14	1.814	43	16	100	4
17.95	G 5/8-14	1.814	47	18	110	4



Article no.	£	
54 805 ...		
	204.35	116
	216.11	018
	307.68	014
	265.49	038 ¹⁾
	284.16	012 ¹⁾
	396.93	058 ¹⁾

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	●

- 1) chamfer section at the front of the tool

Thread Milling Cutter with Chamfer Facet

- ▲ profile-corrected
- ▲ hard machining to Ø DC = 4 mm possible
- ▲ chamfer section at end of shank

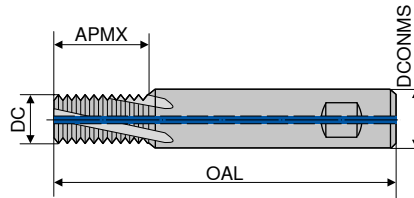


Ti500



HB Solid carbide
W8


DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	Article no. 54 811 ...	£	
mm		mm	mm	mm	mm				
4.80	UNC 1/4-20	1.270	14	8	62	3	157.44	014	1)
5.95	UNC 5/16-18	1.411	18	10	74	3	176.25	516	
7.95	UNC 3/8-16	1.588	22	12	80	3	213.76	038	
7.95	UNC 7/16-14	1.814	22	14	90	3	260.79	716	
9.90	UNC 1/2-13	1.954	27	14	90	4	265.49	012	
11.80	UNC 9/16-12	2.117	31	16	100	4	317.10	916	
12.70	UNC 5/8-11	2.309	34	14	90	4	265.49	058	2)
15.20	UNC 3/4-10	2.540	38	20	110	5	455.71	034	

- 1) without through coolant
- 2) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	Article no. 54 813 ...	£	
mm		mm	mm	mm	mm				
4.80	UNF 1/4-28	0.907	14	8	62	3	157.44	014	1)
5.95	UNF 5/16-24	1.058	18	10	74	3	176.25	516	
7.60	UNF 3/8-24	1.058	21	12	80	3	213.76	038	
7.95	UNF 7/16-20	1.270	22	14	90	3	260.79	716	
9.90	UNF 1/2-20	1.270	26	14	90	4	265.49	012	
12.00	UNF 9/16-18	1.411	30	16	100	4	317.10	916	
13.50	UNF 5/8-18	1.411	33	14	90	4	265.49	058	2)
17.00	UNF 3/4-16	1.588	38	20	110	5	455.71	034	

- 1) without through coolant
- 2) chamfer section at the front of the tool



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	Article no. 54 809 ...	£	
mm		mm	mm	mm	mm				
10.1	NPT 1/4-18	1.411	15	14	90	3	300.64	014	1)
12.8	NPT 3/8-18	1.411	15	16	100	4	361.78	038	1)
16.0	NPT 1/2-14	1.814	19	20	110	5	495.57	012	1)
18.5	NPT 3/4-14	1.814	19	20	110	5	495.57	034	1)

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
hardened materials	●

- 1) chamfer section at the front of the tool

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter


▲ available on request: M30, M36, M42, M48, M56, M64

SGF

≤ 2xD

60°

M

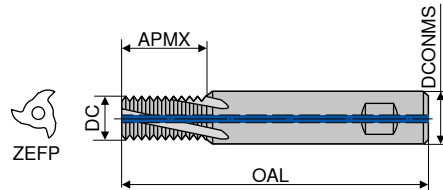

TiAlN
Solid carbide
W1

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	Article no. 50 825 ...	£	
mm		mm	mm	mm	mm				
2.40	M3	0.50	6	4	42	3		244.93	030 ¹⁾
3.15	M4	0.70	8	6	55	3		263.57	040
4.00	M5	0.80	10	6	55	3		263.57	050
4.80	M6	1.00	12	6	55	3		263.57	060
6.00	M8	1.25	16	6	63	3		270.07	080
8.00	M10	1.50	20	8	70	3		307.83	100
9.90	M12	1.75	24	10	80	4		373.29	120
11.60	M14	2.00	28	12	90	4		439.34	140
12.00	M16	2.00	32	12	90	4		437.24	160
14.00	M18	2.50	36	14	90	4		579.90	180
14.00	M22	2.50	44	14	95	4		807.83	220
14.00	M20	2.50	40	14	90	4		658.62	200

1) without through coolant

60°

MF

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	Article no. 50 826 ...	£	
mm		mm	mm	mm	mm				
3.35	M4x0,5	0.50	8	6	55	3		316.69	040
4.20	M5x0,5	0.50	10	6	55	3		316.69	050
5.00	M6x0,75	0.75	12	6	55	3		316.69	061
6.00	M8x0,75	0.75	16	6	63	3		316.69	081
6.00	M8x1	1.00	16	6	63	3		316.69	082
8.00	M10x1	1.00	20	8	70	3		316.69	102
10.00	M12x1	1.00	24	10	80	4		377.00	122
10.00	M12x1,5	1.50	24	10	80	4		377.00	124
10.00	M14x1,5	1.50	28	10	80	4		377.00	144
12.00	M16x1,5	1.50	32	12	90	4		460.94	164
14.00	M18x1,5	1.50	36	14	90	4		575.38	184
14.00	M20x1,5	1.50	40	14	90	4		575.62	204
14.00	M22x1,5	1.50	44	14	95	4		604.74	224
16.00	M24x1,5	1.50	36	16	90	5		673.02	244

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●


→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_r or feed on the center path v_{fm} is used. Details on → Page 72+73.


Thread Milling Cutter

▲ available on request: M30, M36, M42, M48, M56, M64


SGF



≤ 2xD



G

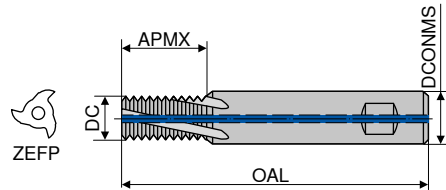

TiAlN



HA 

Solid carbide
W1

Article no.
50 827 ...

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP		
mm		mm	mm	mm	mm		£	
8	G 1/8-28	0.907	19.5	8	70	3	323.28	018
11	G 1/4-19	1.337	26.5	12	90	4	464.85	014
12	G 3/8-19	1.337	33.0	12	90	4	464.85	038
14	G 1/2-14	1.814	42.0	14	95	4	638.57	012
16	G 3/4-14	1.814	34.0	16	90	5	685.88	034
16	G 1-11	2.309	33.0	16	90	5	712.53	100
16	G 5/8-14	1.814	34.0	16	90	5	696.98	058

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

→ v_c/f_z Page 69

i When calculating the feedrate for circular milling it is important to know whether contour feed v_t or feed on the center path v_{fm} is used. Details on → **Page 72+73.**

Thread Milling Cutter

- ▲ profile corrected
- ▲ hard machining to Ø DC = 4 mm possible


SGF

IR/IL

≤ 2xD

60°

M

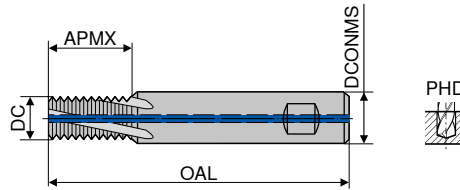

HB Solid carbide
W8

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	PHD
mm		mm	mm	mm	mm		mm
2.40	M3	0.50	6.5	4	42	2	2.50
3.15	M4	0.70	9.0	6	55	3	3.30
4.00	M5	0.80	11.0	6	55	3	4.20
4.80	M6	1.00	13.0	6	55	3	5.00
6.00	M8	1.25	18.0	6	60	3	6.75
8.00	M10	1.50	21.0	8	70	3	8.50
9.90	M12	1.75	26.0	10	75	4	10.25
11.60	M14	2.00	30.0	12	85	4	12.00
12.00	M16	2.00	34.0	12	85	4	14.00
14.00	M18	2.50	40.0	14	90	4	15.50
16.00	M20	2.50	42.0	16	90	4	17.50

Article no.	
54 800 ...	
£	
89.94	030 ¹⁾
89.94	040 ²⁾
89.94	050 ²⁾
89.94	060 ²⁾
94.42	080
114.16	100
138.02	120
159.81	140
167.07	160
197.85	180
205.46	200

- 1) DIN 6535 HA shank / without through coolant
- 2) without through coolant

60°

MF

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	PHD
mm		mm	mm	mm	mm		mm
4.0	M5	0.50	11	6	55	3	4.50
4.8	M6	0.75	13	6	55	3	5.25
6.0	M8	1.00	18	6	60	3	7.00
8.0	M10	1.25	21	8	70	3	8.75
9.9	M12	1.00	26	10	75	4	11.00
9.9	M12	1.25	26	10	75	4	10.75
9.9	M12	1.50	26	10	75	4	10.50
11.6	M14	1.00	30	12	85	4	13.00
11.6	M14	1.50	30	12	85	4	12.50
12.0	M16	1.50	34	12	85	4	14.50
14.0	M18	1.50	40	14	90	4	16.50
16.0	M20	1.50	42	16	90	4	18.50

Article no.	
54 802 ...	
£	
89.94	050 ¹⁾
89.94	060 ¹⁾
94.42	080
114.16	100
138.02	120
138.02	121
138.02	122
159.81	140
159.81	141
167.07	160
197.85	180
205.46	200

- 1) DIN 6535 HA shank / without through coolant

55°

G



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	PHD
mm		mm	mm	mm	mm		mm
8.0	G 1/8-28	0.907	21	8	70	3	8.80
9.9	G 1/4-19	1.337	26	10	75	4	11.80
14.0	G 3/8-19	1.337	40	14	90	4	15.25
16.0	G 1/2-14	1.814	42	16	90	4	19.00

Article no.	
54 804 ...	
£	
129.71	018
146.99	014
171.21	038
207.51	012

Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●


Thread Milling Cutter

▲ profile corrected

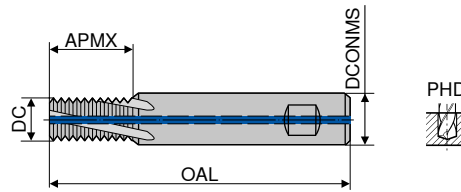


HB Solid carbide
W8

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	PHD	Article no.	
mm		mm	mm	mm	mm		mm	54 806 ...	
6.0	BSW 5/16 - 18	1.411	18	6	60	3	6.50	£ 108.95	516
6.0	BSW 3/8 - 16	1.588	18	6	60	3	7.90	£ 110.67	038
8.0	BSW 7/16 - 14	1.814	21	8	70	3	9.25	£ 130.75	716
8.0	BSW 1/2 - 12	2.117	21	8	70	3	10.50	£ 130.87	012
9.9	BSW 5/8 - 11	2.309	26	10	75	4	13.50	£ 152.53	058



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	PHD	Article no.	
mm		mm	mm	mm	mm		mm	54 808 ...	
6.0	BSF 5/16 - 22	1.155	18	6	60	3	6.8	£ 110.67	516
6.0	BSF 3/8 - 20	1.270	18	6	60	3	8.3	£ 110.67	038
8.0	BSF 7/16 - 18	1.411	21	8	70	3	9.7	£ 130.75	716
8.0	BSF 1/2 - 16	1.588	21	8	70	3	11.1	£ 130.75	012
9.9	BSF 5/8 - 14	1.814	26	10	75	4	14.0	£ 152.53	058



DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZAFP	PHD	Article no.	
mm		mm	mm	mm	mm		mm	54 810 ...	
4.80	UNC 1/4-20	1.270	13	6	55	3	5.1	£ 105.01	014 ¹⁾
6.00	UNC 5/16-18	1.411	18	6	60	3	6.6	£ 124.51	516
7.95	UNC 3/8-16	1.588	21	8	70	3	8.0	£ 129.71	038
7.95	UNC 7/16-14	1.814	21	8	70	3	9.4	£ 130.75	716
9.90	UNC 1/2-13	1.954	26	10	75	4	10.8	£ 151.15	012

- Steel ●
- Stainless steel ●
- Cast iron ●
- Non ferrous metals ●
- Heat resistant alloys ●
- Hardened materials ●

1) DIN 6535 HA shank / without through coolant

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter


▲ profile corrected

SGF

≤ 2xD

60°

UNF

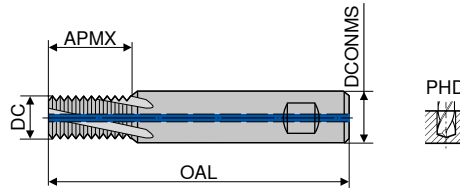

Ti500



HB

Solid carbide
W8

Article no.
54 812 ...

DC	Thread	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD	£	Article no.
mm		mm	mm	mm	mm		mm		
4.8	UNF 1/4-28	0.907	13	6	55	3	5.5	105.01	014 ¹⁾
6.0	UNF 5/16-24	1.058	18	6	60	3	6.9	108.95	516
8.0	UNF 3/8-24	1.058	21	8	70	3	8.5	130.87	038
8.0	UNF 7/16-20	1.270	21	8	70	3	9.9	130.87	716
9.9	UNF 1/2-20	1.270	26	10	75	4	11.5	129.71	012



Steel	●
Stainless steel	●
Cast iron	●
Non ferrous metals	●
Heat resistant alloys	●
Hardened materials	●

1) without through coolant

→ v_c/f_z Page 71

i When calculating the feedrate for circular milling it is important to know whether contour feed v_f or feed on the center path v_{fm} is used. Details on → Page 72+73.

Thread Milling Cutter

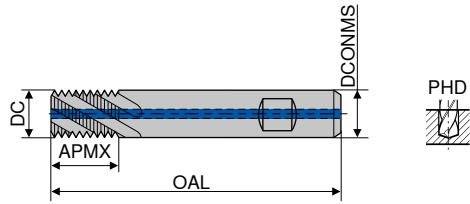

Ti500

HB

Solid carbide
W8

Article no.	£	
54 832 ...		
	342.21	008
	342.21	080
	346.25	100
	346.25	101
	422.73	120
	422.73	121
	422.73	122
	571.68	160
	523.37	161
	579.72	162
	587.77	164

DC	TP	APMX	DCONMS _{h6}	OAL	ZEFP	PHD	
mm	mm	mm	mm	mm		mm	
8	0.50	12	8	70	3	10	
8	0.75	12	8	70	3	11	
10	1.00	16	10	75	4	14	
10	1.50	16	10	75	4	14	
12	1.00	20	12	85	4	16	
12	1.50	20	12	85	4	16	
12	2.00	20	12	85	4	18	
16	1.00	25	16	90	5	22	
16	1.50	25	16	90	5	22	
16	2.00	25	16	90	5	22	
16	3.00	25	16	90	5	24	

Steel	•
Stainless steel	•
Cast iron	•
Non ferrous metals	•
Heat resistant alloys	•
Hardened materials	•

→ v_c/f_z Page 70

i When calculating the feedrate for circular milling it is important to know whether contour feed v_c or feed on the center path v_{fm} is used. Details on → Page 72+73.

Material examples referring to the cutting data tables

	Index	Material	Strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation	Material number	Material designation
P	1.1	General construction steel	< 800 N/mm ²	1.0402	EN3B				
	1.2	Free cutting steel	< 800 N/mm ²	1.0711	EN1A				
	1.3	Hardened steel, non alloyed	< 800 N/mm ²	1.0401	EN32C				
	1.4	Alloyed hardened steel	< 1000 N/mm ²	1.7325	25 CD4				
	1.5	Tempering steel, unalloyed	< 850 N/mm ²	1.5752	EN36	1.0535	EN9		
	1.6	Tempering steel, unalloyed	< 1000 N/mm ²	1.6582	EN24				
	1.7	Tempering steel, alloyed	< 800 N/mm ²	1.7225	EN19				
	1.8	Tempering steel, alloyed	< 1300 N/mm ²	1.8515	EN40B				
	1.9	Steel castings	< 850 N/mm ²	0.9650	G-X 260 Cr 27	1.6750	GS-20 NiCrMo 3.7	1.6582	GS-34 CrNiMo 6
	1.10	Nitriding steel	< 1000 N/mm ²	1.8509	EN41B				
	1.11	Nitriding steel	< 1200 N/mm ²	1.1186	EN8	1.1160	EN14A		
	1.12	Roller bearing steel	< 1200 N/mm ²	1.3505	534A99				
	1.13	Spring steel	< 1200 N/mm ²		EN45		EN47		EN43
	1.14	High-speed steel	< 1300 N/mm ²	1.3343	M2	1.3249	M34		
	1.15	Cold working tool steel	< 1300 N/mm ²	1.2379	D2	1.2311	P20		
	1.16	Hot working tool steel	< 1300 N/mm ²	1.2344	H13				
M	2.1	Cast steel and sulphured stainless steel	< 850 N/mm ²	1.4581	318				
	2.2	Stainless steel, ferritic	< 750 N/mm ²	1.4000	403				
	2.3	Stainless steel, martensitic	< 900 N/mm ²	1.4057	EN57				
	2.4	Stainless steel, ferritic / martensitic	< 1100 N/mm ²	1.4028	EN56B				
	2.5	Stainless steel, austenitic / ferritic	< 850 N/mm ²	1.4542	17-4PH				
	2.6	Stainless steel, austenitic	< 750 N/mm ²	1.4305	303	1.4401	316	1.4301	304
	2.7	Heat resistant steel	< 1100 N/mm ²	1.4876	Incoloy 800				
K	3.1	Grey cast iron with lamellar graphite	100–350 N/mm ²	0.6015	Grade 150	0.6020	Grade 220	0.6025	Grade 260
	3.2	Grey cast iron with lamellar graphite	300–500 N/mm ²	0.6030	Grade 300	0.6035	Grade 350	0.6040	Grade 400
	3.3	Gray cast iron with spheroidal graphite	300–500 N/mm ²	0.7040	SG 400-12	0.7043	SG 370-17	0.7050	SG 500-7
	3.4	Gray cast iron with spheroidal graphite	500–900 N/mm ²	0.7060	SG 600-3	0.7070	SG 700-2	0.7080	SG 800-2
	3.5	White malleable cast iron	270–450 N/mm ²	0.8035	GTW-35	0.8045	GTW-45		
	3.6	White malleable cast iron	500–650 N/mm ²	0.8055	GTW-55	0.8065	GTW-65		
	3.7	Black malleable cast iron	300–450 N/mm ²	0.8135	GTS-35	0.8145	GTS-45		
	3.8	Black malleable cast iron	500–800 N/mm ²	0.8155	GTS-55	0.8170	GTS-70		
N	4.1	Aluminium (non alloyed, low alloyed)	< 350 N/mm ²	3.0255	1050 A	3.0275	1070 A	3.0285	1080 A (A8)
	4.2	Aluminium alloys < 0.5 % Si	< 500 N/mm ²	3.1325	2017 A (AU4G)	3.4335	7005 (AZ5G)	3.4365	7075 (AZ5GU)
	4.3	Aluminium alloy 0.5–10 % Si	< 400 N/mm ²	3.2315	A-G S1	3.2373	A-S9 G	3.2151	A-S6 U4
	4.4	Aluminium alloys 10–15 % Si	< 400 N/mm ²	3.2581	A-S12	3.2583	A-S12 U		
	4.5	Aluminum alloys > 15 % Si	< 400 N/mm ²		A-S18		A-S17 U4		
	4.6	Copper (non alloyed, low alloyed)	< 350 N/mm ²	2.0040	Cu-c1	2.0060	Cu-a1	2.0090	Cu-b1
	4.7	Copper wrought alloys	< 700 N/mm ²	2.1247	Cub2 (Beryllium Copper)	2.0855	CuN2S (Nickel Copper)	2.1310	CU-Fe2P
	4.8	Special copper alloys	< 200 HB	2.0916	Cu-A5	2.1525	Cu-S3 M		Ampco 8 (Cu-A6Fe2)
	4.9	Special copper alloys	< 300 HB	2.0978	Cu-Ai11 Fe5 Ni5		Ampco 18 (Cu-A10 Fe3)		
	4.10	Special copper alloys	> 300 HB	2.1247	Cu Be2		Ampco M4		
	4.11	Short-chipping brass, bronze, red bronze	< 600 N/mm ²	2.0331	Cu Zn36 Pb1,5	2.0380	Cu Zn39 Pb2 (Ms 56)	2.0410	Cu Zn44 Pb2
	4.12	Long-chipping brass	< 600 N/mm ²	2.0335	Cu Zn 36 (Ms63)	2.1293	Cu Cr1 Zr		
	4.13	Thermoplastics			PE		PS		Plexiglas
	4.14	Duroplastics			PF		Bakelite		Pertinax
	4.15	Fibre-reinforced plastics			Carbon Fibre		Fibreglass		Aramid Fibre (Kevlar)
	4.16	Magnesium and magnesium alloys	< 850 N/mm ²	3.5812	Mg A7 Z1	3.5662	Mg A9	3.5105	Mg Tr3 Z2 Zn 1
	4.17	Graphite			R8500X		R8650		Technograph 15
	4.18	Tungsten and tungsten alloys			W-Ni Fe (Densimet)		W- Ni Cu (Inermet)		Denal
	4.19	Molybdenum and molybdenum alloys			TZM		MHO		Mo W
S	5.1	Pure nickel		2.4066	Ni99 (Nickel 200)	2.4068	Lc Ni99 (Nickel 201)		
	5.2	Nickel alloys		1.3912	Fe-Ni36 (Invar)	1.3917	Fe-Ni42 (N42)	1.3922	Fe-Ni48 (N48)
	5.3	Nickel alloys	< 850 N/mm ²	2.4375	Ni Cu30 Al (Monel K500)	2.4360	Ni Cu30Fe (Monel 400)	2.4668	
	5.4	Nickel molybdenum alloys		2.4600	Ni Mo30Cr2 (Hastelloy B4)	2.4617	Ni Mo28 (Hastelloy B2)	2.4819	Ni Mo16Cr16 Hastell. C276
	5.5	Nickel-chromium alloys	< 1300 N/mm ²	2.4951	Ni Cr20TiAl (Nimonic 80A)	2.4858	Ni Cr21Mo (Inconel 825)	2.4856	Ni Cr22Mo9Nb Inconel 625
	5.6	Cobalt Chrome Alloys	< 1300 N/mm ²	2.4964	Co Cr20 W15 Ni10		Co Cr20 Ni16 Mo7		Co Cr28 Mo 6
	5.7	Heat resistant alloys	< 1300 N/mm ²	1.4718	Z45 C S 9-3	1.4747	Z80 CSN 20-02	1.4845	Z12 CN 25-20
	5.8	Nickel-cobalt-chromium alloys	< 1400 N/mm ²	2.4851	Ni Cr23Fe (Inconel 601)	2.4668	Ni Cr19NbMo (Inconel 718)	2.4602	Ni Cr21Mo14 Hastelloy C22
	5.9	Pure titanium	< 900 N/mm ²	3.7025	T35 (Titanium Grade 1)	3.7034	T40 (Titanium Grade 2)	3.7064	T60 (Titanium Grade 4)
	5.10	Titanium alloys	< 700 N/mm ²		T-A6-Nb7 (367)		T-A5-Sn2-Mo4-Cr4 (Ti17)		T-A3-V2,5 (Gr18)
	5.11	Titanium alloys	< 1200 N/mm ²	3.7165	T-A6-V4 (Ta6V)		T-A4-3V-Mo2-Fe2 (SP700)		T-A5-Sn1-Zr1-V1-Mo (Gr32)
H	6.1		< 45 HRC						
	6.2		46–55 HRC						
	6.3	Tempered steel	56–60 HRC						
	6.4		61–65 HRC						
	6.5		65–70 HRC						

Cutting data approximate values

Index	UNI VHM OSM 2xD			UNI VHM OSM 3xD			H VHM 2xD				HR VHM		
	50 815 ...			50 821 ...			50 840 ...				50 846 ... 50 847 ...		
	v_c m/min	$\emptyset 6-10$ f_z	$\emptyset 12-20$ f_z	v_c m/min	$\emptyset 6-10$ f_z	$\emptyset 12-20$ f_z	v_c m/min	$\emptyset 3-5$ f_z	$\emptyset 6-10$ f_z	$\emptyset 12-16$ f_z	v_c m/min	< 10 f_z	> 10 f_z
1.1	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.2	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.3	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.4	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.5	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.6	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.7	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.8	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.9	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
1.10	100-200	0,02-0,04	0,04-0,07	100-130	0,02-0,04	0,04-0,07					120-220	0,02-0,04	0,04-0,07
1.11	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.12	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.13	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.14	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.15	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
1.16	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
2.1	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.2	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.3	100-200	0,02-0,03	0,04-0,05								60-120	0,015-0,03	0,03-0,06
2.4	100-200	0,02-0,03	0,04-0,05								60-120	0,015-0,03	0,03-0,06
2.5	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.6	100-200	0,02-0,03	0,04-0,05	80-160	0,02-0,03	0,04-0,05					60-120	0,015-0,03	0,03-0,06
2.7	100-200	0,02-0,03	0,04-0,05								60-120	0,015-0,03	0,03-0,06
3.1	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.2	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.3	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.4	200-300	0,05-0,07	0,07-0,12	160-240	0,05-0,07	0,07-0,12							
3.5	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
3.6	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
3.7	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
3.8	150-220	0,03-0,05	0,06-0,08	120-160	0,03-0,05	0,06-0,08							
4.1													
4.2													
4.3													
4.4													
4.5	220-250	0,05-0,07	0,06-0,08	180-200	0,05-0,07	0,06-0,08							
4.6													
4.7													
4.8													
4.9											60-80	0,02-0,04	0,03-0,05
4.10											60-80	0,02-0,04	0,03-0,05
4.11	250-300	0,05-0,07	0,06-0,08	200-240	0,05-0,07	0,06-0,08							
4.12													
4.13													
4.14													
4.15	250-300	0,05-0,07	0,06-0,08	180-200	0,05-0,07	0,06-0,08					400-500	0,05-0,08	0,07-0,10
4.16	250-300	0,05-0,07	0,06-0,08	180-200	0,05-0,07	0,06-0,08							
4.17													
4.18	50-80	0,015-0,025	0,020-0,035								40-60	0,015-0,025	0,020-0,035
4.19	100-200	0,02-0,04	0,04-0,07								120-220	0,02-0,04	0,04-0,07
5.1	200-250	0,04-0,06	0,07-0,10	150-200	0,04-0,06	0,07-0,10							
5.2											60-80	0,02-0,03	0,03-0,04
5.3											60-80	0,02-0,03	0,03-0,04
5.4							40-80	0,005-0,015	0,015-0,03	0,02-0,05	30-60	0,01-0,02	0,02-0,03
5.5							40-80	0,005-0,015	0,015-0,03	0,02-0,05	30-60	0,01-0,02	0,02-0,03
5.6							60-100	0,005-0,015	0,02-0,04	0,03-0,06	30-60	0,01-0,02	0,02-0,03
5.7	70-100	0,02-0,03	0,04-0,05				80-120	0,005-0,015	0,02-0,04	0,03-0,06	40-60	0,01-0,02	0,02-0,03
5.8							40-80	0,005-0,015	0,015-0,03	0,02-0,05	30-60	0,01-0,02	0,02-0,03
5.9											60-80	0,02-0,03	0,03-0,04
5.10											60-80	0,02-0,03	0,03-0,04
5.11							40-80	0,005-0,015	0,015-0,03	0,02-0,05	60-80	0,02-0,03	0,03-0,04
6.1	80-120	0,02-0,04	0,04-0,06				80-120	0,005-0,015	0,03-0,06	0,03-0,06	60-100	0,02-0,04	0,03-0,06
6.2	80-120	0,02-0,04	0,04-0,06				60-100	0,005-0,015	0,02-0,04	0,02-0,04	60-100	0,02-0,04	0,03-0,06
6.3	50-80	0,015-0,025	0,020-0,035				30-60	0,005-0,01	0,01-0,03	0,01-0,03	40-60	0,015-0,025	0,020-0,035
6.4	50-80	0,015-0,025	0,020-0,035				30-60	0,005-0,01	0,005-0,015	0,005-0,02	40-60	0,015-0,025	0,020-0,035
6.5													

Cutting data approximate values

Index	SFSE VHM TiAIN			SGF VHM TiAIN			MWN uncoated		MWN TiAIN		EAW / EWM		
	v_c m/min	$\phi 6-10$ f_z	$\phi 12-20$ f_z	v_c m/min	$\phi 6-10$ f_z	$\phi 12-20$ f_z	v_c m/min	f_z	v_c m/min	f_z	v_c m/min	EAW f_z	EWM f_z
1.1	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.2	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.3	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.4	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.5	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.6	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.7	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.8	40-80	0,01-0,03	0,03-0,05										
1.9	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10	50-100	0,10-0,20	100-200	0,10-0,20	250-500	0,10-0,20	0,10-0,20
1.10	40-80	0,01-0,03	0,03-0,05	40-60	0,01-0,03	0,02-0,04	40-70	0,05-0,10	80-140	0,05-0,10	150-250	0,06-0,12	0,06-0,12
1.11	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.12	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.13	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.14	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.15	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
1.16	40-80	0,01-0,03	0,03-0,05								150-250	0,06-0,12	0,06-0,12
2.1	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.2	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.3	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.4	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.5	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.6	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
2.7	60-100	0,02-0,06	0,05-0,08	60-100	0,02-0,06	0,05-0,08			100-200	0,02-0,05	60-120	0,03-0,09	0,03-0,09
3.1	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.2	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.3	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.4	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14	70-120	0,10-0,15	100-180	0,10-0,15	200-350	0,10-0,20	0,10-0,20
3.5	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
3.6	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
3.7	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
3.8	80-150	0,03-0,06	0,05-0,08	80-150	0,03-0,06	0,05-0,08	50-100	0,08-0,12	80-150	0,08-0,12	150-250	0,04-0,12	0,04-0,12
4.1	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,10-0,20	200-250	0,10-0,20	400-500	0,08-0,15	0,08-0,15
4.2	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,10-0,20	200-250	0,10-0,20	400-500	0,08-0,15	0,08-0,15
4.3	225-275	0,05-0,07	0,06-0,08	225-275	0,05-0,07	0,06-0,08	100-200	0,10-0,20	200-250	0,10-0,20	400-500	0,08-0,15	0,08-0,15
4.4	200-225	0,04-0,06	0,05-0,07	200-225	0,04-0,06	0,05-0,07	100-200	0,10-0,20	200-250	0,10-0,20	300-400	0,06-0,10	0,06-0,10
4.5	180-200	0,03-0,05	0,04-0,06	180-200	0,03-0,05	0,04-0,06			150-200	0,08-0,10	300-400	0,06-0,10	0,06-0,10
4.6	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,12-0,15	200-250	0,12-0,15	400-500	0,08-0,15	0,08-0,15
4.7	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	100-200	0,12-0,15	200-250	0,12-0,15	400-500	0,08-0,15	0,08-0,15
4.8	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10			200-250	0,03-0,06	400-500	0,08-0,15	0,08-0,15
4.9	60-80	0,02-0,03	0,03-0,04	50-70	0,02-0,03	0,03-0,04			40-80	0,12-0,15	150-200	0,08-0,12	0,08-0,12
4.10	60-80	0,02-0,03	0,03-0,04	50-70	0,02-0,03	0,03-0,04			40-80	0,12-0,15	150-200	0,08-0,12	0,08-0,12
4.11	200-225	0,04-0,06	0,05-0,07	200-225	0,04-0,06	0,05-0,07	70-120	0,04-0,08	100-150	0,04-0,08	400-500	0,08-0,15	0,08-0,15
4.12	275-300	0,06-0,09	0,08-0,10	275-300	0,06-0,09	0,08-0,10	90-180	0,08-0,10	150-200	0,08-0,10	400-500	0,08-0,15	0,08-0,15
4.13	350-450	0,10-0,13	0,12-0,15	350-450	0,10-0,13	0,12-0,15	180-250	0,15-0,20	250-300	0,15-0,20	600-800	0,15-0,25	0,15-0,25
4.14	300-400	0,10-0,13	0,12-0,15	300-400	0,10-0,13	0,12-0,15	100-200	0,12-0,15	200-250	0,12-0,15	600-800	0,15-0,25	0,15-0,25
4.15	180-200	0,04-0,06	0,05-0,07	180-200	0,04-0,06	0,05-0,07			100-150	0,04-0,08	150-200	0,08-0,12	0,08-0,12
4.16	200-225	0,04-0,06	0,05-0,07	200-225	0,04-0,06	0,05-0,07			100-130	0,04-0,08	400-500	0,08-0,15	0,08-0,15
4.17	100-200	0,04-0,08	0,08-0,14	100-200	0,04-0,08	0,08-0,14							
4.18													
4.19	40-80	0,01-0,03	0,03-0,05								150-250	0,08-0,12	0,08-0,12
5.1	100-200	0,04-0,08	0,06-0,12	80-150	0,03-0,07	0,06-0,10					250-500	0,10-0,20	0,10-0,20
5.2	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.3	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.4													
5.5													
5.6													
5.7													
5.8													
5.9	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.10	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
5.11	50-80	0,02-0,04	0,03-0,05	50-80	0,02-0,04	0,03-0,05					50-100	0,02-0,08	0,02-0,08
6.1													
6.2													
6.3													
6.4													
6.5													

Cutting data approximate values

Index	SGF VHM Ti500			GZG / GZD				Polygon		System 300		
	54 832 ...			50 863 ..., 50 864 ..., 50 887 ..., 50 885 ..., 50 888 ..., 50 889 ..., 50 894 ...				50 872 ..., 50 874 ..., 50 875 ..., 50 876 ..., 50 879 ..., 50 880 ..., 50 881 ..., 50 882 ..., 50 883 ..., 50 884 ..., 50 886 ...		50 851 ..., 50 852 ..., 50 853 ..., 50 855 ..., 50 857 ..., 50 858 ..., 50 859 ...		
	Ti500	size		uncoated	Ti500	size		Ti500		uncoated	Ti500	
	V_c m/min	8 mm f_z	10-16 mm f_z	V_c m/min	V_c m/min	12-17 mm f_z	20-26 mm f_z	V_c m/min	f_z	V_c m/min	V_c m/min	f_z
1.1	80-250	0,04-0,07	0,05-0,15		180-260	0,1-0,3	0,05-0,3	150-200	0,05-0,25		120-180	0,05-0,12
1.2	80-250	0,04-0,07	0,05-0,15		180-260	0,1-0,3	0,05-0,3	150-200	0,05-0,25		120-180	0,05-0,12
1.3	80-250	0,04-0,07	0,05-0,15		180-260	0,1-0,3	0,05-0,3	100-150	0,05-0,25		120-180	0,05-0,12
1.4	60-120	0,04-0,07	0,05-0,10		180-220	0,1-0,3	0,05-0,3	100-150	0,05-0,25		100-120	0,05-0,12
1.5	60-100	0,04-0,07	0,05-0,10		180-260	0,1-0,3	0,05-0,3	150-200	0,05-0,25		120-180	0,05-0,12
1.6	60-120	0,04-0,07	0,05-0,10		180-220	0,1-0,3	0,05-0,3	100-150	0,05-0,25		100-120	0,05-0,12
1.7	80-200	0,04-0,07	0,05-0,10		180-260	0,1-0,3	0,05-0,3	100	0,05-0,25		120-180	0,05-0,12
1.8	40-100	0,03-0,05	0,04-0,06		100-150	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
1.9	60-100	0,04-0,07	0,05-0,10		180-260	0,1-0,3	0,05-0,3	100	0,05-0,25		100-120	0,05-0,12
1.10	60-120	0,04-0,07	0,05-0,10		100-150	0,1-0,2	0,05-0,2	120	0,05-0,25		100-120	0,05-0,12
1.11	40-100	0,03-0,05	0,04-0,06		100-150	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
1.12	40-100	0,03-0,05	0,04-0,06		100-150	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
1.13	40-100	0,03-0,05	0,04-0,06		100-150	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
1.14	40-100	0,03-0,05	0,04-0,06		100-120	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
1.15	40-100	0,03-0,05	0,04-0,06		100-150	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
1.16	40-100	0,03-0,05	0,04-0,06		100-150	0,1-0,2	0,05-0,2	100	0,05-0,25		80-100	0,05-0,12
2.1	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3				120-150	0,05-0,12
2.2	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3				120-150	0,05-0,12
2.3	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3	120	0,05-0,25		100-120	0,05-0,12
2.4	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3	120	0,05-0,25		100-120	0,05-0,12
2.5	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3	120	0,05-0,25		120-180	0,05-0,12
2.6	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3	180	0,05-0,25		120-180	0,05-0,12
2.7	50-150	0,04-0,07	0,05-0,12		130-180	0,1-0,3	0,05-0,3				80-100	0,05-0,12
3.1	80-200	0,04-0,07	0,05-0,15	100-150	130-200	0,1-0,3	0,05-0,3	180	0,05-0,25	80-120	120-180	0,05-0,12
3.2	80-200	0,04-0,07	0,05-0,15	80-120	130-200	0,1-0,3	0,05-0,3	120	0,05-0,25	80-120	120-180	0,05-0,12
3.3	80-200	0,04-0,07	0,05-0,15		130-200	0,1-0,3	0,05-0,3	180	0,05-0,25	80-120	120-180	0,05-0,12
3.4	80-200	0,04-0,07	0,05-0,15		130-200	0,1-0,3	0,05-0,3	180	0,05-0,25	80-120	120-180	0,05-0,12
3.5	80-160	0,04-0,07	0,05-0,15		130-200	0,1-0,3	0,05-0,3	180	0,05-0,25	80-120	120-180	0,05-0,12
3.6	80-160	0,04-0,07	0,05-0,15		130-200	0,1-0,3	0,05-0,3	120	0,05-0,25	80-120	120-180	0,05-0,12
3.7	80-160	0,04-0,07	0,05-0,15		130-200	0,1-0,3	0,05-0,3	180	0,05-0,25	80-120	120-180	0,05-0,12
3.8	80-160	0,04-0,07	0,05-0,15		130-200	0,1-0,3	0,05-0,3	120	0,05-0,25	80-120	120-180	0,05-0,12
4.1	250-500	0,05-0,08	0,07-0,2	300-400	400-600	0,1-0,3	0,05-0,3	400	0,15-0,4	400-500		0,05-0,25
4.2	250-500	0,05-0,08	0,07-0,2	300-400	400-600	0,1-0,3	0,05-0,3	400	0,15-0,4	300-400		0,05-0,25
4.3	250-500	0,05-0,08	0,07-0,2					300	0,15-0,4			
4.4	250-500	0,05-0,08	0,07-0,2					250	0,15-0,4			
4.5	180-250	0,05-0,07	0,06-0,12									
4.6	250-300	0,05-0,07	0,06-0,08					500	0,15-0,4		300-500	0,05-0,25
4.7												
4.8								120	0,05-0,15			
4.9												
4.10												
4.11	250-300	0,05-0,07	0,06-0,08					400	0,15-0,4		200-300	0,05-0,25
4.12								400	0,15-0,4			
4.13	350-450	0,08-0,1						500	0,15-0,4		300-500	0,05-0,25
4.14	80-400	0,05-0,1	0,08-0,25					500	0,15-0,4		300-500	0,05-0,25
4.15	180-200	0,02-0,04	0,03-0,04									
4.16												
4.17								500	0,15-0,4		300-500	0,05-0,25
4.18												
4.19												
5.1												
5.2								120	0,05-0,25		80-120	0,05-0,12
5.3								120	0,05-0,25		80-120	0,05-0,12
5.4												
5.5												
5.6												
5.7												
5.8												
5.9												
5.10								80	0,01-0,08		70-100	0,01-0,05
5.11	40-60	0,03-0,05	0,04-0,1					60	0,01-0,08		60-90	0,01-0,05
6.1	40-60	0,03-0,05	0,04-0,1								80-100	0,03-0,1
6.2	40-60	0,03-0,05	0,04-0,1					100	0,05-0,15		80	0,03-0,1
6.3								100	0,05-0,10			
6.4												
6.5												

Cutting data approximate values

SFSE / SGF VHM Ti500					MiniMill			MicroMill	
54 800 ... 54 801 ... 54 802 ... 54 803 ... 54 804 ... 54 805 ... 54 806 ... 54 808 ... 54 809 ... 54 810 ... 54 811 ... 54 812 ... 54 813 ...					53 006 ... 53 007 ... 53 008 ... 53 009 ... 53 010 ... 53 011 ... 53 012 ... 53 013 ... 53 015 ...			53 050 ... 53 051 ... 53 052 ... 53 053 ...	
Index	V _c m/min	Ø 2,4 + 3,15 f _z	Ø 4 f _z	Ø 4,8-16 f _z	V _c m/min	f _z (drilling)	f _z (threading)	V _c m/min	f _z (drilling)
1.1	80-250	0,03-0,04	0,03-0,06	0,05-0,15	80-200	0,03-0,10	0,10-0,25	60-200	0,02-0,05
1.2	80-250	0,03-0,04	0,03-0,06	0,05-0,15	80-200	0,03-0,10	0,10-0,25	60-200	0,02-0,05
1.3	80-250	0,03-0,04	0,03-0,06	0,05-0,15	80-200	0,03-0,10	0,10-0,25	60-200	0,02-0,05
1.4	60-120	0,01-0,02	0,01-0,03	0,05-0,10	60-180	0,03-0,08	0,10-0,15	60-160	0,01-0,04
1.5	60-120	0,01-0,02	0,01-0,03	0,05-0,10	60-180	0,03-0,08	0,10-0,15	60-160	0,02-0,05
1.6	60-120	0,01-0,02	0,01-0,03	0,05-0,10	60-180	0,03-0,08	0,10-0,15	60-160	0,01-0,04
1.7	80-200	0,03-0,04	0,03-0,06	0,05-0,10	60-160	0,03-0,10	0,10-0,20	50-140	0,02-0,05
1.8	40-100	0,01-0,02	0,03-0,05	0,04-0,06	60-160	0,02-0,07	0,10-0,20	50-140	0,007-0,03
1.9	60-120	0,01-0,02	0,04-0,07	0,05-0,10	60-160	0,03-0,10	0,10-0,20	50-140	0,02-0,05
1.10	60-120	0,01-0,02	0,04-0,07	0,05-0,10	60-160	0,03-0,10	0,10-0,20	50-140	0,01-0,04
1.11	40-100	0,01-0,02	0,03-0,05	0,04-0,06	60-160	0,02-0,08	0,10-0,20	50-140	0,007-0,03
1.12	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.13	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.14	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.15	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
1.16	40-100	0,01-0,02	0,03-0,05	0,04-0,06	30-100	0,02-0,07	0,10-0,20	10-60	0,007-0,03
2.1	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,03-0,08	0,10-0,25	60-120	0,01-0,04
2.2	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,03-0,10	0,10-0,25	60-120	0,02-0,05
2.3	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.4	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.5	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.6	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
2.7	50-150	0,03-0,04	0,03-0,04	0,05-0,12	80-120	0,02-0,07	0,10-0,25	60-120	0,007-0,03
3.1	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.2	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.3	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.4	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.5	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.6	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.7	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
3.8	100-200	0,03-0,07	0,03-0,07	0,04-0,08	100-170	0,03-0,10	0,2-0,3	70-170	0,02-0,05
4.1	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.2	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.3	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.4	250-500	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.5	180-250	0,05-0,07	0,05-0,07	0,06-0,12	250-800	0,04-0,15	0,05-0,2	100-600	0,02-0,07
4.6	250-300	0,05-0,07	0,05-0,07	0,06-0,08	200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.7					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.8					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.9					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.10					200-500	0,04-0,15	0,05-0,2	100-300	0,02-0,07
4.11	250-300	0,05-0,07	0,05-0,07	0,06-0,08	150-180	0,04-0,15	0,05-0,2	120-180	0,02-0,07
4.12					150-180	0,04-0,15	0,05-0,2	120-180	0,02-0,07
4.13	350-450	0,08-0,1	0,08-0,1	0,1-0,12	20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,1
4.14	300-400	0,08-0,1	0,08-0,1	0,1-0,12	20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,1
4.15	180-200	0,02-0,04	0,02-0,04	0,03-0,04	20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,07
4.16					20-100	0,02-0,10	0,05-0,2	10-50	0,02-0,05
4.17					20-100	0,04-0,15	0,05-0,2	10-50	0,02-0,07
4.18					20-100	0,02-0,10	0,05-0,2	10-50	0,02-0,05
4.19					20-100	0,02-0,10	0,05-0,2	10-50	0,02-0,05
5.1					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.2					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.3	60-80	0,02-0,04	0,02-0,04	0,03-0,04	10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.4					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.5					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.6					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.7					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.8					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.9					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.10					10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
5.11	50-80	0,01-0,03	0,01-0,03	0,01-0,03	10-100	0,005-0,05	0,05-0,1	10-60	0,007-0,02
6.1	40-60		0,03-0,05	0,03-0,05	10-60	0,002-0,05		10-40	0,007-0,02
6.2	40-50		0,03-0,05	0,03-0,05	10-60	0,002-0,05		10-40	0,007-0,02
6.3	30-40		0,02-0,04	0,02-0,04	10-60	0,002-0,05		10-40	0,007-0,02
6.4								10-40	0,007-0,02
6.5									


7

Milling Procedures

Climb milling

Characteristics:




- ① Tool rotation direction „right“
- ② Toolpath counter clockwise
- ③ Feed direction „outwards“

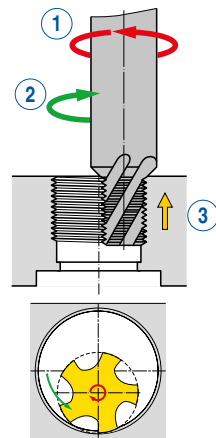


Conventional milling

Characteristics:

- ① Tool rotation direction „right“
- ② Toolpath clockwise
- ③ Feed direction „inwards“

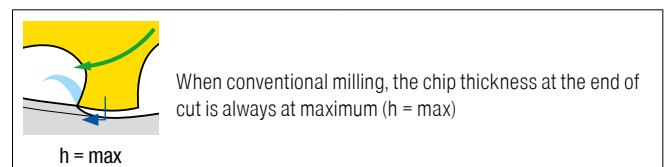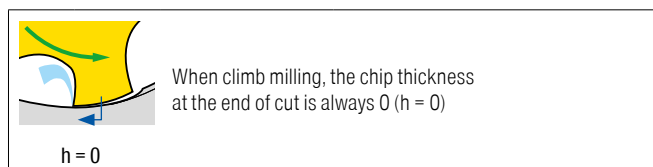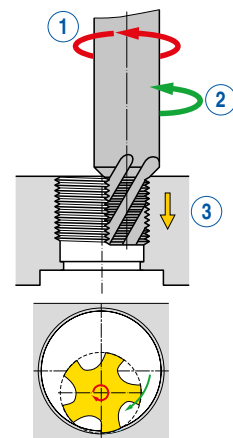


Feed rate calculation

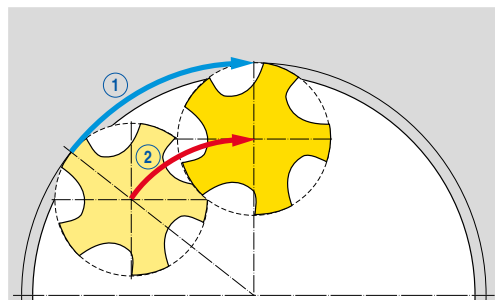


- ① Peripheral feedrate v_f
- ② Centerline feedrate v_{fm}

Peripheral feedrate v_f

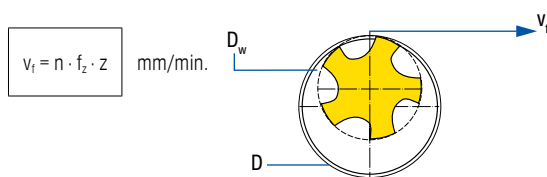

Centerline feedrate v_{fm}

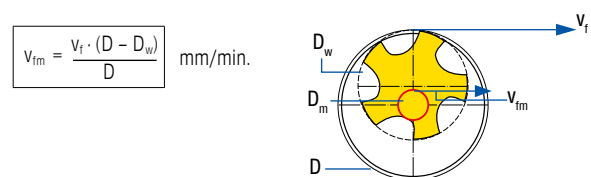

- D_w = Effective diameter in mm
- n = RPM in min^{-1}
- f_z = Feed per tooth in mm

- z = Number of cutting edges (radial)
- D = Nominal thread diameter = external profile diameter in mm
- D_m = Centre path diameter ($D - D_w$) in mm

Tips for the User

i With thread milling there are two different programme possibilities with the feed motion of the tool.

On the one hand the machine controls the feed at the diameter of the tool, on the other hand the feed control is the tool center line. In order to ascertain which method the machine control uses, the following method should be employed:

- ▲ enter the thread milling routine into the control
- ▲ enter a safety margin into the program, so that the tool runs in air
- ▲ run the program through and check the operating time
- ▲ compare the actual time with the calculated theoretical time

If the time is longer than the calculated time the feed is controlling the tool center line.
If the time is shorter than the calculated time the feed is controlling the diameter of the tool.

Numeric calculation of cutting data for thread milling

$$n = \frac{v_c \cdot 1000}{d \cdot \pi}$$

$$v_c = \frac{d \cdot \pi \cdot n}{1000}$$

$$v_f = f_z \cdot z \cdot n$$

$$n = \frac{v_f}{f_z \cdot z}$$

$$f_z = \frac{v_f}{z \cdot n}$$

Milling – external contour

$$v_{fm} = \frac{v_f \cdot (D + d)}{D}$$

$$v_f = \frac{D \cdot v_{fm}}{(D + d)}$$

Milling – internal contour

$$v_{fm} = \frac{v_f \cdot (D - d)}{D}$$

$$v_f = \frac{D \cdot v_{fm}}{(D - d)}$$

Helical plunging

$$U_{arc} = 0,25 \cdot v_{fm}$$

n	=	rpm	rev./min.
v _c	=	cutting speed	m/min
d	=	tool diameter	mm
D	=	nominal thread-Ø	mm
v _f	=	feed rate at the diameter	mm/min.

Ramping in the arc

$$U_{arc} = v_{fm}$$

v _{fm}	=	feed rate at the centre	mm/min.
U _{arc}	=	programmed ramping feed rate	mm/min.
f _z	=	feed per tooth	mm
z	=	number of cutting edges of the cutter	piece

7

Correction values for the internal thread milling

The cutting edge diameter of the thread milling cutter which is entered into the machine control, can be calculated as follows:

half the cutter Ø – 0.05 x pitch p

Example: M30x3
Cutter-Ø: 20 mm

$$\frac{\emptyset 20}{2} - (0.05 \cdot 3) = \underline{9.85 \text{ mm}}$$

9.85 mm is the cutting radius to be entered into the machine control

Thread types

M	Metric ISO standard thread	BSF	Whitworth fine thread
MF	Metric ISO fine thread	BSW	Whitworth thread
G	Whitworth thread	Pg	Steel conduit thread
UNF	Unified fine thread	UN	Unified thread
NPT	American taper pipe thread	Tr	Trapezoidal thread

Tool types

EAW	Thread milling cutter with solid carbide inserts and weldon flat	MWN	Thread milling cutter with carbide inserts and Weldon flat
EWM	Thread milling cutter with solid carbide inserts and SK adaptor	Polygon	Circular milling cutter with polygon insert seat
GZD	Thread milling cutter with carbide inserts and Weldon flat	SGF	Thread milling cutter
GZG	Thread milling cutter with carbide inserts and Weldon flat	Micro Mill	Solid Carbide Circular End Milling Cutter
HR	Single point thread milling cutter	System 300	Circular milling cutter with solid carbide insert
SFSE	Thread milling cutter with chamfer facet	UNI	Thread milling cutter for universal application
Mini Mill	Circular milling cutter with solid carbide insert		

Coatings

TiN	<ul style="list-style-type: none"> ▲ TiN coating ▲ maximum application temperature: 450 °C 	CWX500	<ul style="list-style-type: none"> ▲ carbide, TiAlN-coated ▲ ISO K30 ▲ the universal carbide grade for almost all materials
TiAlN	<ul style="list-style-type: none"> ▲ TiAlN multilayer coating ▲ maximum application temperature: 900 °C 	OSM	<ul style="list-style-type: none"> ▲ hard material layer and anti-friction layer ▲ for use in high-strength steels
Ti500	<ul style="list-style-type: none"> ▲ TiAlN-coating ▲ maximum application temperature: 500 °C 	TiCN	<ul style="list-style-type: none"> ▲ TiCN multilayer coating ▲ maximum application temperature: 450 °C